Zone Valves

Selection data & performance | Manufacturer technical reference.

A patented range of manifold mounted zone valves manufactured in 316 stainless steel for use within the high pressure water mist industry. The zone valve can be supplied fitted into a one to five station manifold, with pilot and solenoid operation.
Various porting configurations are available; please contact TWHC with your specific requirements.




Solenoid


- Solenoid actuated 12 or 24 volts for independent zone operation.
- Coil power 32 watts.
- Maximum pressure 160 bar.
- 0-60 l/min per zone.
- Available in sizes DN3 , DN9 and DN25

Pilot

- Pilot actuated for independent zone operation.
- Pilot pressure 10 to 40 bar.
- Maximum pressure 160 bar.
- 0-60 l/min per zone.
- Available in sizes DN3 , DN9 and DN25
- ATEX approved

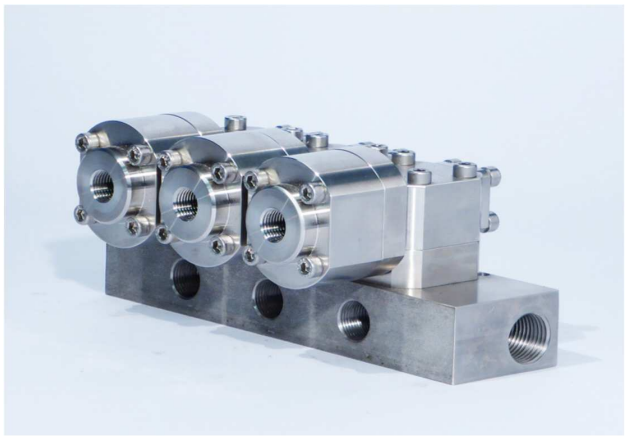

Fully opened pressure drop against flow rates

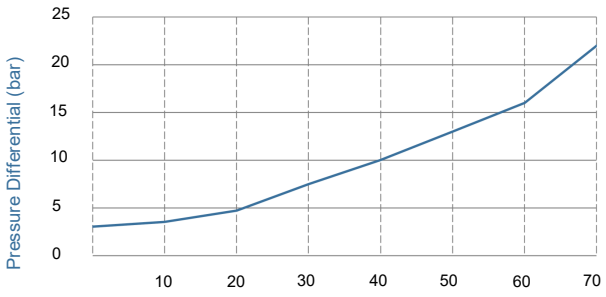

The Water Hydraulics Co. Ltd.
Alexandra House, English Street, Hull, East Yorkshire, HU3 2DJ, United Kingdom.
Tel: +44 (0)1482 595000, E-Mail: sales@waterhydraulics.co.uk.
England Website: www.waterhydraulics.co.uk

Whilst every endeavour has been made to ensure accuracy, this publication cannot be considered to represent part of any contract, whether expressed or implied. The publishers reserve the right to amend specification at their discretion.

V01.25

bsi ISO 9001 Quality Management Systems CERTIFIED
FM 87247

Specify open/closed duty, actuation supply, fail state, pressure drop and the fire-system control interface. Confirm approvals for the complete selected system. Water service removes hydraulic oil from the fluid circuit. Minimise unnecessary pressure loss; request configuration-specific approval evidence.

Zone Valves V.01.25.pdf, p. 1. Manufacturer labels and dimensions retained.