WATER HYDRAULIC MOTORS / PRODUCT INFORMATION

M30 Water Hydraulic Motor

Review oil-free hydraulic components engineered around 316 stainless wetted materials, water-compatible wear interfaces, and real industrial pressure requirements.

Evaluate the M30 at the required starting torque and running speed. Use its displacement and performance data to confirm flow, pressure difference and drive behaviour; include case-drain limits, stopping and shaft-load requirements.



M30 Water Hydraulic Motor

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Specifications and selection data

Parameter	Dimension
Flange Diameter	Ø144 mm
Bolt Circle	Ø101.55 - 101.60 mm (4 in)
Mounting Bolts	4× M10 (KEY 8×7)
Shaft Diameter	Ø23.98 - 23.993 mm (0.945 in)
Overall Length	156 mm (6.14 in)
Height	110 mm (4.33 in)
Pressure Ports	3/4" BSPP
Tank Port (MB/MC)	1/2" BSPP
Dry Weight	~14.5 kg (32 lb)


Selection and integration

Reference Engineering Calculators Reference Technical Glossary


Performance curves

Reference curves reproduced from the product webpage. Curves retain the published data points and speed/displacement labels. Confirm guaranteed performance at the selected duty.


Efficiency (%) vs Pressure (bar)

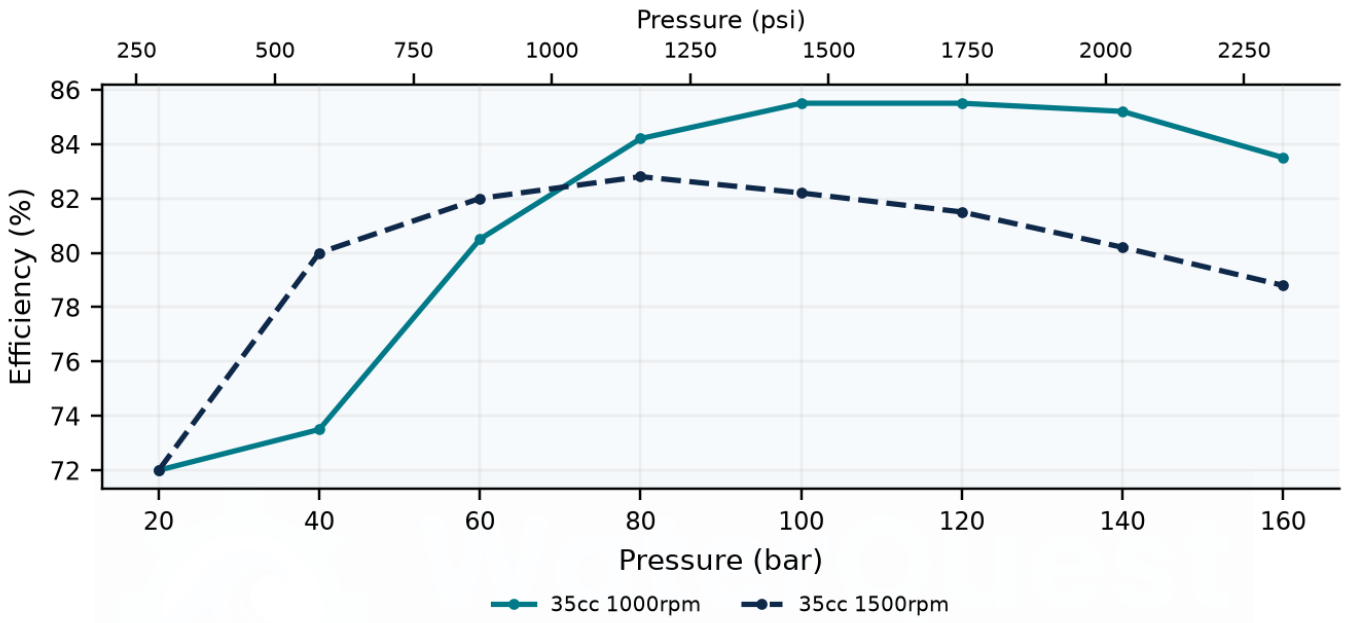

Flow (L/min) vs Pressure (bar)

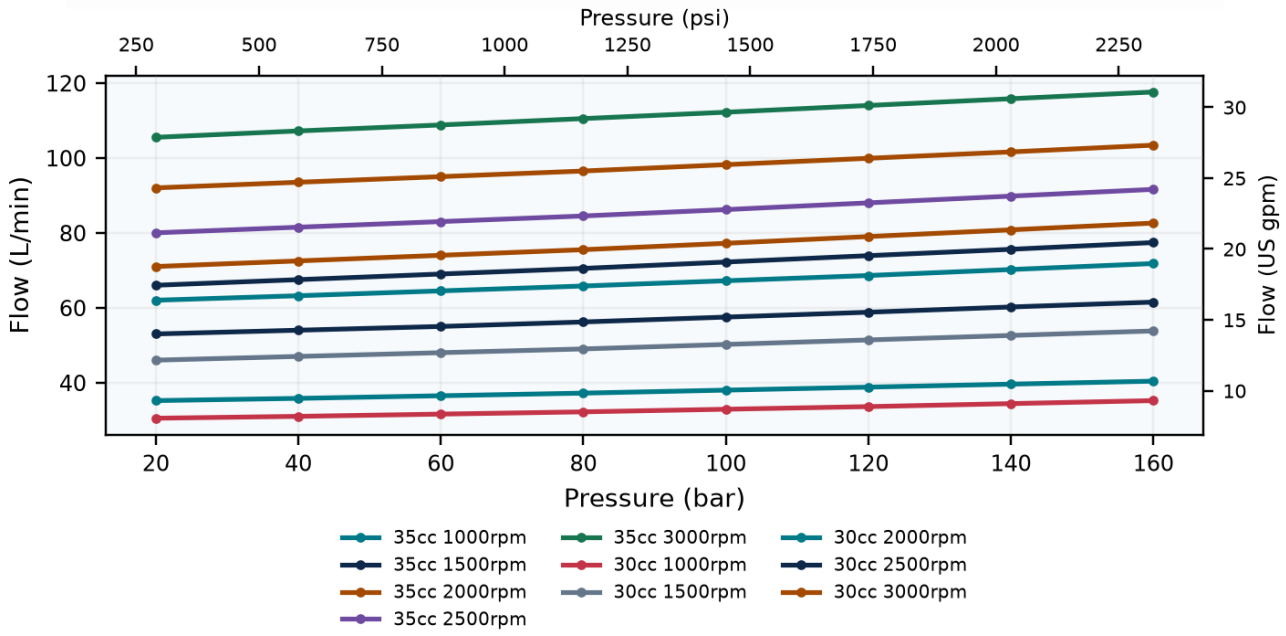

Output Power (kW) vs Pressure (bar)

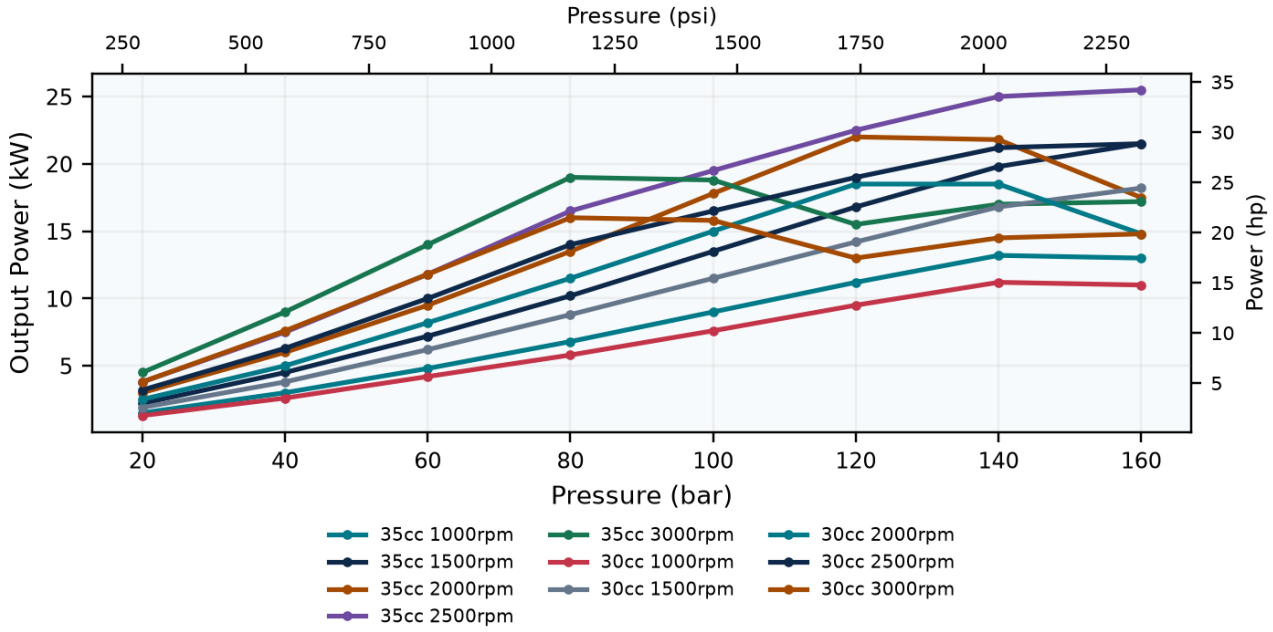

Torque (Nm) vs Pressure (bar)

