WATER HYDRAULIC VALVES / PRODUCT INFORMATION

Electronic Flow Control Valves

Match the commanded flow range to the actuator duty and available pressure difference. Confirm the electrical interface, response and required behaviour on loss of signal.

Pair with a suitable transducer and programmable drive for closed-loop control.



Electronic Flow Control Valves - Product view

Key operating parameters

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	0-160 bar (0-2,321 psi)
Overall flow envelope	0-30 L/min (0-7.93 US gpm)
Feed galleries	3 mm (0.118 in) and 6 mm (0.236 in)
Ports / mounting	BSPP and manifold

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	0-160 bar (0-2,321 psi)
Overall flow envelope	0-30 L/min (0-7.93 US gpm)
Feed galleries	3 mm (0.118 in) and 6 mm (0.236 in)
Ports / mounting	BSPP and manifold
Materials	316 stainless steel, ceramic and polymer
Motor supply	48 V DC
Listed current	125 mA
Connections	Flying lead or plug
Control	Open loop or closed loop with appropriate feedback

Electronic Flow Control Valves - options

Version	Stand-alone	Manifold	Selection range
DN3	223ARRW	2M23ARRW	Confirm required metering range
DN6	223BRRW	2M23BRRW	Confirm required metering range


Selection and integration

Selection considerations Confirm the exact metering range for DN3 or DN6 at the required duty. Where a fail-safe shut-off is required, specify an additional on/off valve in the pressure line. Discuss your application

Drawings and reference visuals


Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.

Electronic Flow Control Valves - Flow characteristics

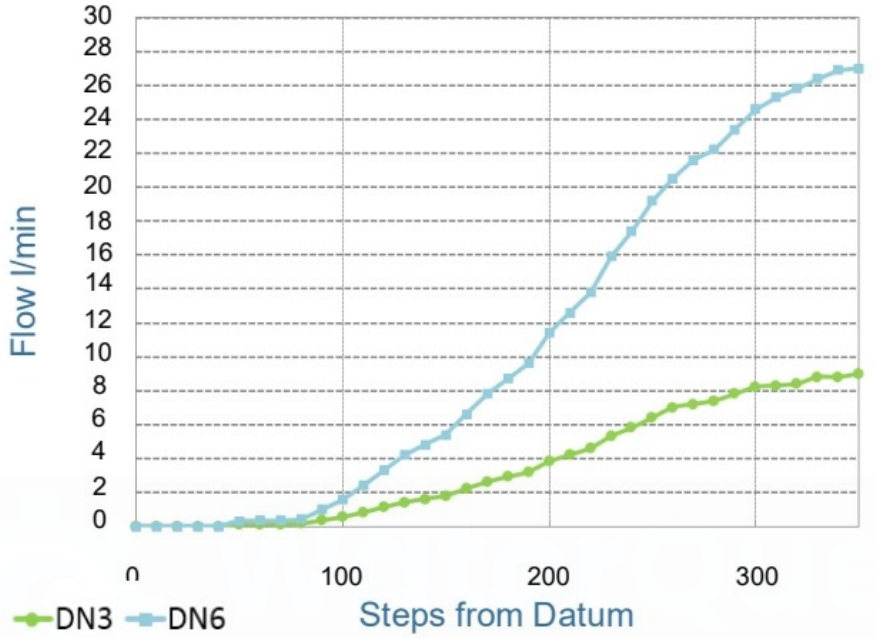

Electronic Flow Control Valves - Standard dimensions

223ARRW & 223BRRW

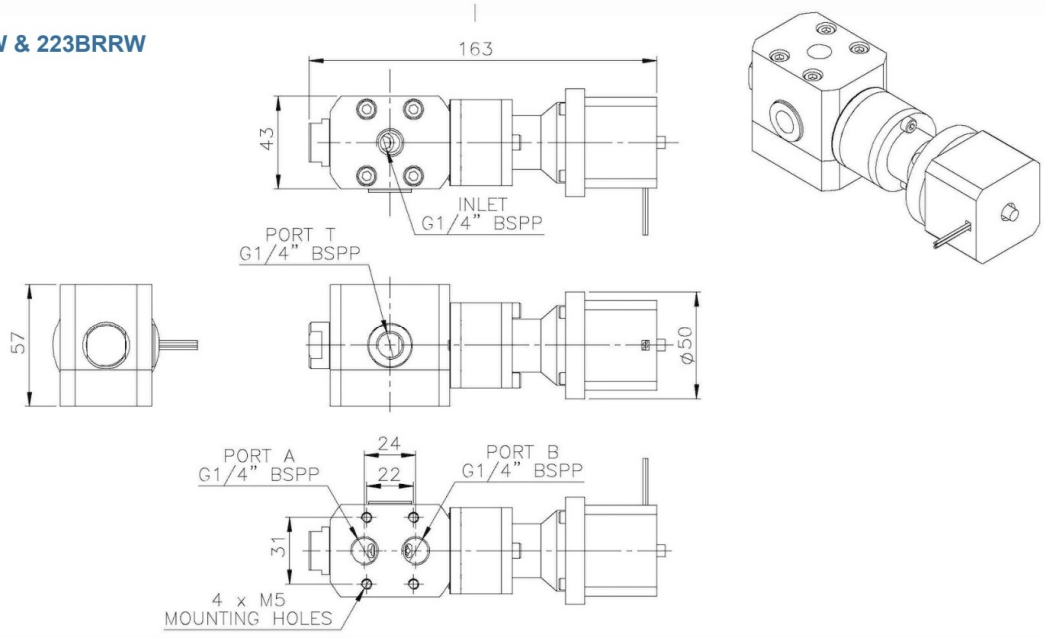

Electronic Flow Control Valves - Manifold dimensions

2M23ARRW & 2M23BRRW

