WATER HYDRAULIC VALVES / PRODUCT INFORMATION

DN12 Pilot-Operated Check Valve

Review the DN12 pilot-operated check valve with pilot ratio, back pressure and the required return flow. Confirm release and reseating behaviour through the operating sequence.

Explore the dimensions, connections and performance information for this range. Select any image for a closer look.



DN12 Pilot-Operated Check Valve - Product view

Key operating parameters

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	0-160 bar (0-2,321 psi)
Flow range	0-60 L/min (0-15.9 US gpm)
Feed gallery	12 mm (0.472 in)
Ports	½" BSPP

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	0-160 bar (0-2,321 psi)
Flow range	0-60 L/min (0-15.9 US gpm)
Feed gallery	12 mm (0.472 in)
Ports	½" BSPP
Materials	AISI 316 stainless steel / polymer
Standard pilot ratio	2.3:1
Pilot sealing	Double seals for separation of pilot and operating fluids
Mounting	Stand-alone or manifold

DN12 Pilot-Operated Check Valve - options

Configuration	Stand-alone	Manifold
Single check / 2.3:1	211DJSW	2M11DJSW


Selection and integration

Selection considerations Confirm pilot-fluid compatibility and the required actuation pressure. Confirm flow coefficients and pressure drop at the intended duty. Discuss your application

Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.

DN12 Pilot-Operated Check Valve - Flow characteristics

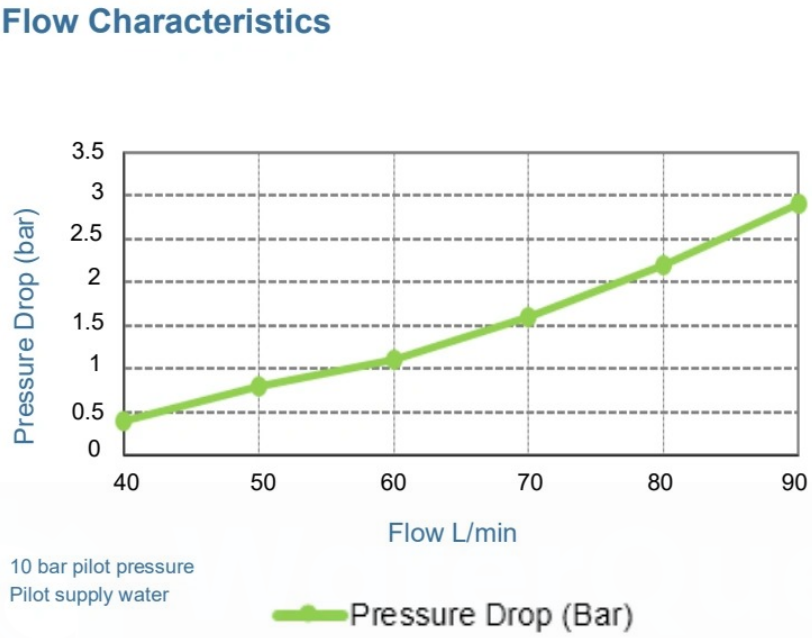

DN12 Pilot-Operated Check Valve - Dimensions

