WATER HYDRAULIC VALVES / PRODUCT INFORMATION

Pressure Reducing Valves

Separate branch pressure regulation from system relief protection. Confirm reducing range, flow capacity, drain or return requirements and the effect of changing upstream pressure.

Limit pressure to one service while the wider system operates at a higher pressure.



Pressure Reducing Valves - Product view

Key operating parameters

Parameter	Published value
Maximum inlet pressure	180 bar (2,611 psi)
Outlet setting bands	10-30 / 30-100 / 70-160 bar (145-435 / 435-1,450 / 1,015-2,321 psi)
Maximum flow	30 L/min (7.93 US gpm)
Feed gallery	6 mm (0.236 in)
Ports	¼" BSPP

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Maximum inlet pressure	180 bar (2,611 psi)
Outlet setting bands	10-30 / 30-100 / 70-160 bar (145-435 / 435-1,450 / 1,015-2,321 psi)
Maximum flow	30 L/min (7.93 US gpm)
Feed gallery	6 mm (0.236 in)
Ports	¼" BSPP
Materials	316 stainless steel / polymer
Fluid	Water
Reverse flow	Unrestricted by the reducing function
Single-stage reduction	Up to 70% reduction of inlet pressure

Pressure Reducing Valves - options

Outlet setting	Order code
10-30 bar (145-435 psi)	109BXSW
30-100 bar (435-1,450 psi)	209BXSW
70-160 bar (1,015-2,321 psi)	309BXSW


Selection and integration

Selection considerations For a 100 bar (1,450 psi) inlet, the minimum reduced pressure in one stage is 30 bar (435 psi). Discuss your application

Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.

Pressure Reducing Valves - Flow characteristics

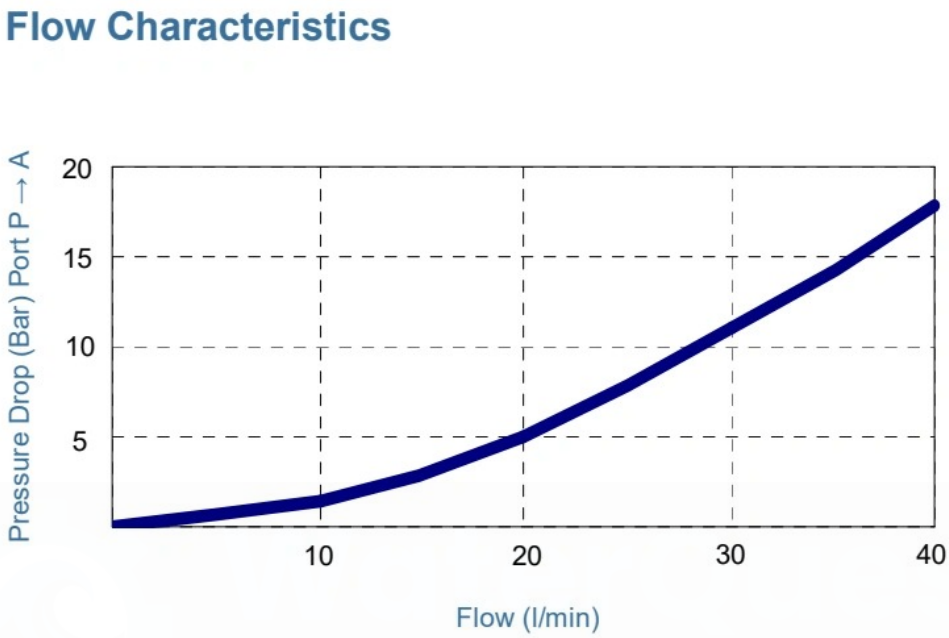

Pressure Reducing Valves - Dimensions

