
WATER HYDRAULIC VALVES / PRODUCT INFORMATION

# Valve Ordering Guide

Specify the valve family, size, pressure range, actuation and connection details together. Confirm the final ordering code against the current manufacturer documentation.

A code describes a configuration; it does not establish that every possible combination is available.

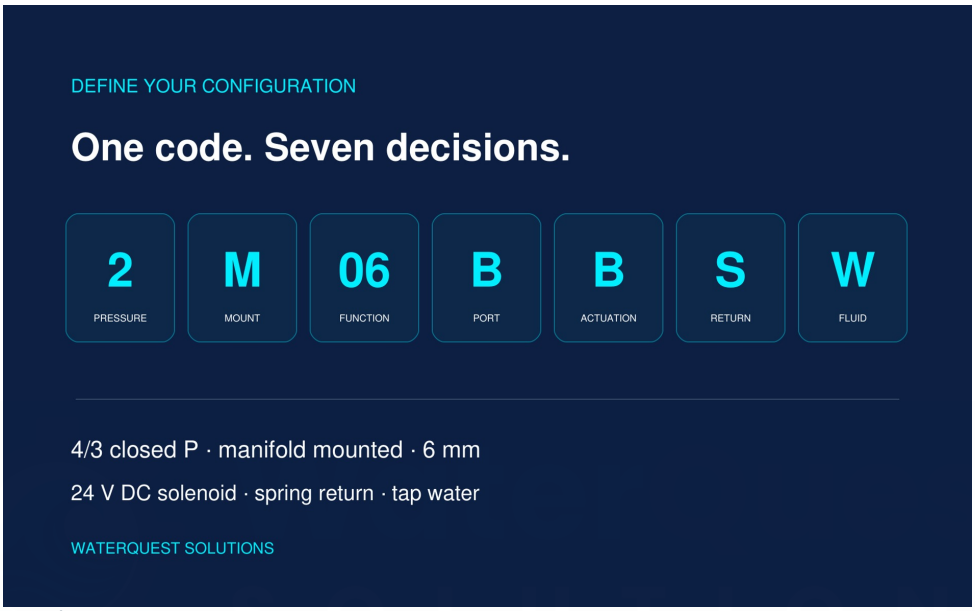

Valve Ordering Guide - Product view

## Key operating parameters

| Parameter | Published value |
|---|---|
| Pressure class | 1: below 30 bar (435 psi) / 2: up to 160 bar (2,321 psi) |
| Special relief classes | 3: special range / 4: 25-100 bar (363-1,450 psi); confirm configuration |
| Mounting | No letter: stand-alone / M: manifold / C: CETOP 3 |
| Port-size letters | A: 3 / B: 6 / C: 9 / D: 12 / E: 16 / F: 25 / G: 38 mm (1.5 in) |
| Fluid letters | O: other / S: seawater / T: technical water / W: tap water |

## Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

# Technical data

| Parameter | Published value |
|---|---|
| Pressure class | 1: below 30 bar (435 psi) / 2: up to 160 bar (2,321 psi) |
| Special relief classes | 3: special range / 4: 25-100 bar (363-1,450 psi); confirm configuration |
| Mounting | No letter: stand-alone / M: manifold / C: CETOP 3 |
| Port-size letters | A: 3 / B: 6 / C: 9 / D: 12 / E: 16 / F: 25 / G: 38 mm (1.5 in) |
| Fluid letters | O: other / S: seawater / T: technical water / W: tap water |
| Return S | Spring return only |

## Valve function codes

| Code | Valve function |
|---|---|
| 01 | 4/2 directional |
| 02 | 4/3 closed centre - confirm availability |
| 03 | 3/2 spring to P closed |
| 04 | Priority flow control |
| 05 | Inline relief |
| 06 | 4/3 closed P |
| 07 | Pressure control |
| 08 | 3/2 spring to P open |
| 09 | Pressure reducing |
| 10 | Check |
| 11 | Single PO check / 3:1 |
| 12 | 4/3 open centre |
| 13 | Double PO check / 3:1 |
| 14 | 4/3 P to A/B at centre |
| 15 | Flow divider |
| 16 | Pressure-compensated flow control |
| 17 | Solenoid-operated unloader |
| 19 | Single PO check / 9:1 |
| 21 | 2/2 normally open |
| 22 | Double PO check / 9:1 |
| 23 | Electronic flow control |
| 25 | Electronic pressure control |
| 26 | 2/2 normally closed |
| XX | Assembly |

# Actuation and return letters

| Letter | Actuation / return |
|---|---|
| A | 12 V DC solenoid; no card |
| B | 24 V DC solenoid; card required |
| C | 48 V DC solenoid; card required |
| D | Detent |
| F | Air pilot |
| G | Manual |
| H | Flow controlled |
| J | Water pilot |
| L | Oil pilot |
| N | 24 V DC proportional |
| O | 24 V DC; no card |
| P | 48 V DC; no card |
| R | Stepper motor control |
| S | Spring - return only |
| X | Pressure |

## Selection and integration

Selection considerations An actuation card is a separate item for solenoid configurations that require one. Use the product page’s listed ordering options and confirm mounting, fluid and actuation compatibility. Discuss your application