
WATER HYDRAULIC VALVES / PRODUCT INFORMATION

Zone Valves

Define zone boundaries, permitted flow direction and the commanded or rest state. Confirm feedback and emergency operating requirements for the complete distribution system.

Explore the dimensions, connections and performance information for this range. Select any image for a closer look.

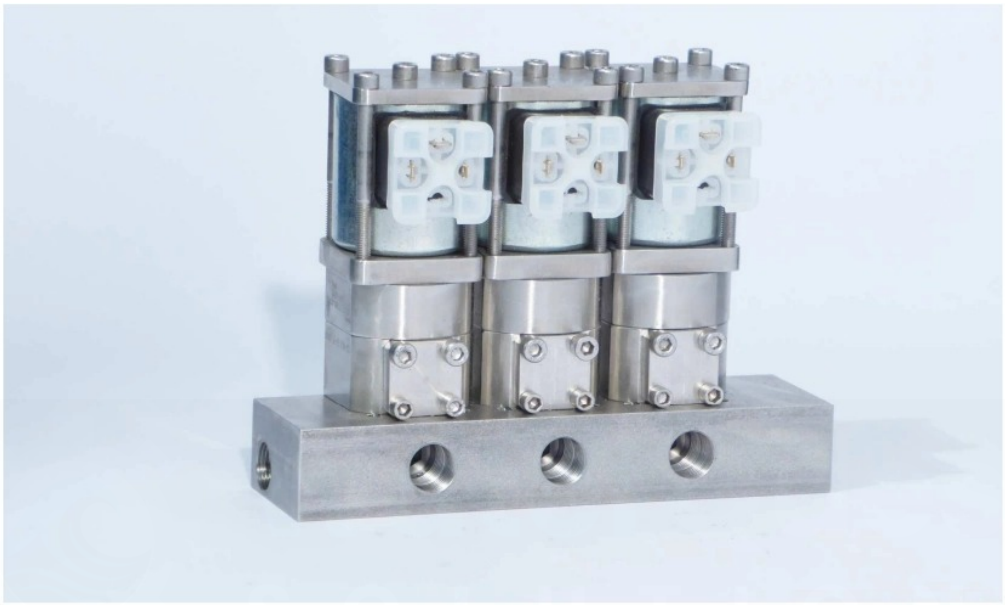

Zone Valves - Product view

Key operating parameters

Parameter	Published value
Maximum pressure	160 bar (2,321 psi)
Flow per zone	0-60 L/min (0-15.9 US gpm)
Construction	316 stainless steel
Sizes	DN3, DN9 and DN25
Manifold stations	1-5

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Maximum pressure	160 bar (2,321 psi)
Flow per zone	0-60 L/min (0-15.9 US gpm)
Construction	316 stainless steel
Sizes	DN3, DN9 and DN25
Manifold stations	1-5
Solenoid supply	12 or 24 V DC
Coil power	32 W (0.0429 hp)
Pilot pressure	10-40 bar (145-580 psi)
Porting	Configured to the application

Zone Valves - options

Actuation	Supply / pilot	Flow per zone
Solenoid	12 or 24 V DC / 32 W (0.0429 hp)	0-60 L/min (0-15.9 US gpm)
Pilot	10-40 bar (145-580 psi) pilot pressure	0-60 L/min (0-15.9 US gpm)


Selection and integration

Selection considerations Confirm the complete zone configuration, porting and required system approvals with WaterQuest Solutions. Discuss your application

Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.

Zone Valves - Pilot-operated assembly

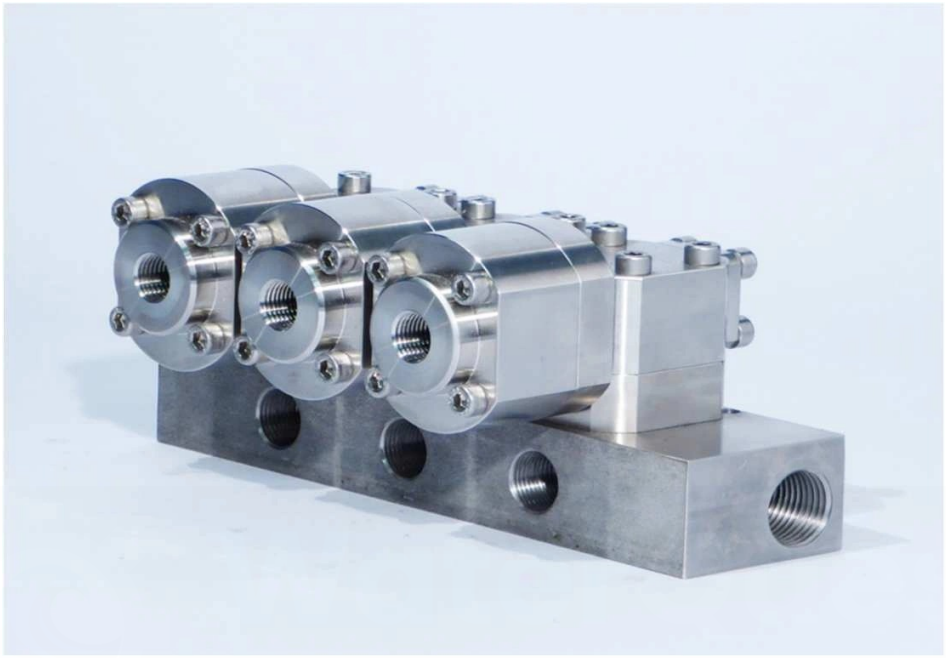

Zone Valves - Flow characteristics

