
Sluice Gate Hydraulic Schematic

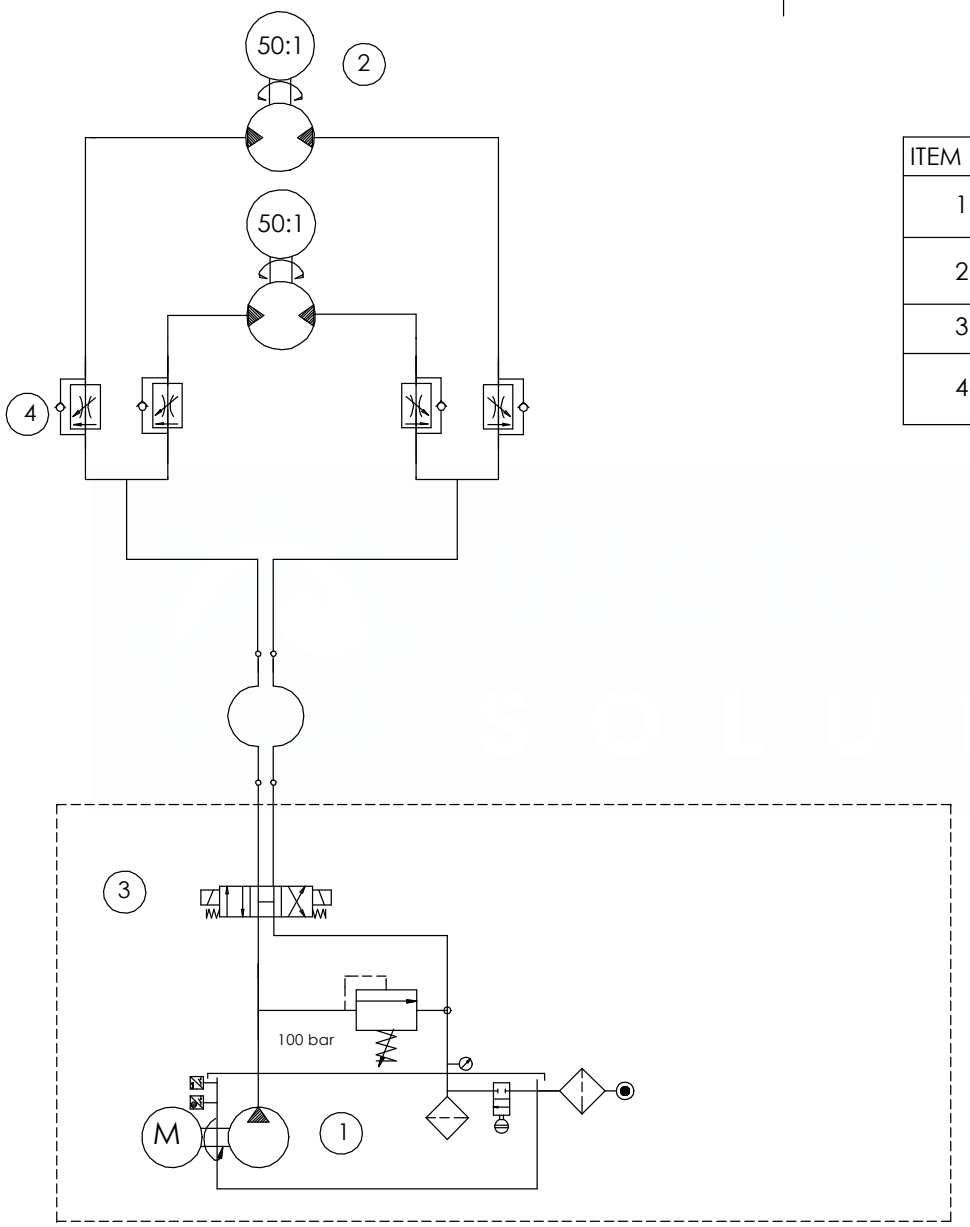

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	P30 Powerpack	P30 Powerpack	1
2	M6 & GEARBOX	M6 & 50:11 GEARBOX	2
3	2M12BBSW	DN6, 4/3, 0-160 bar, Spring Return	1
4	216CXSW	DN6+ Priority Flow Control Valve	4

SPECIFICATION:
MOTOR: M6 - 6.0CC/REV
GEARBOX: 50:1(HARMOINC DRIVE)
OUTPUT SPEED: 40 RPM
OUTPUT TORQUE: 450NM
OPERATING PRESSURE: 100 BAR
MOTOR INPUT FLOW: 13.5 L/MIN (PER MOTOR)

POWERPACK:

P30 23 CC/REV - PUMP OUTPUT FLOW RATE 33 l/min @ 1450 RPM
INPUT POWER REQURIED - 64.7Nm / 9.8kW.

Reference drawing. Do not scale from this PDF; confirm the current project drawing and component ratings.