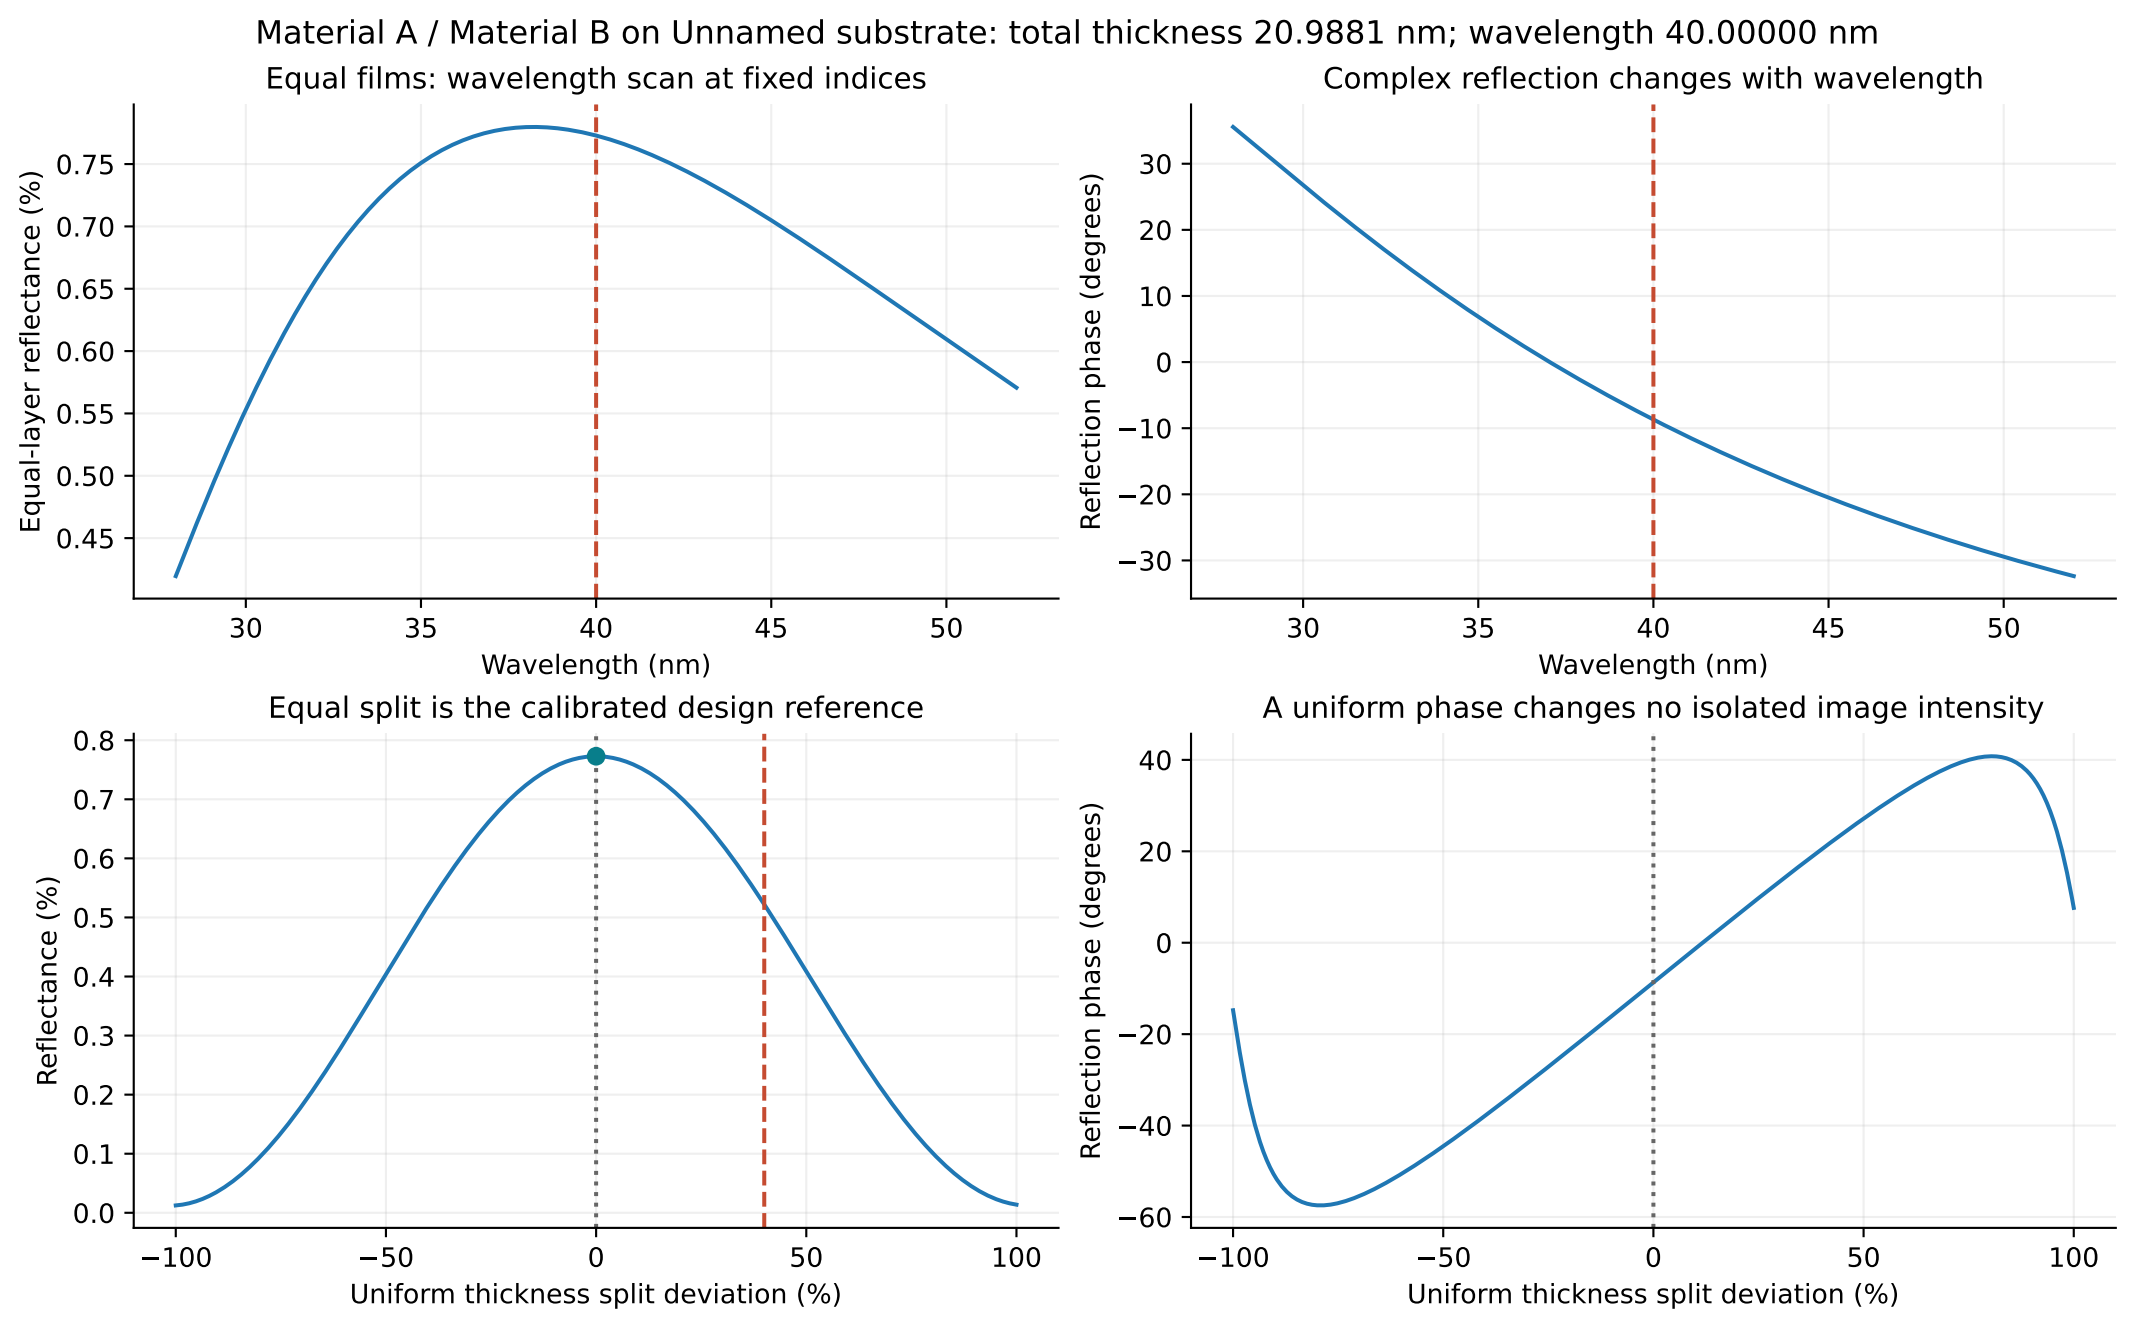
Material A / Material B on Unnamed substrate: total thickness 20.9881 nm; wavelength 40.00000 nm
Equal films: wavelength scan at fixed indices
Equal-layer reflectance (%)
0.75
0.70
0.65
0.60
0.55
0.50
0.45
30
35
40
45
50
Wavelength (nm)
Complex reflection changes with wavelength
Reflection phase (degrees)
30
20
10
0
−10
−20
−30
30
35
40
45
50
Wavelength (nm)
Equal split is the calibrated design reference
Reflectance (%)
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0.0
−100
−50
0
50
100
Uniform thickness split deviation (%)
A uniform phase changes no isolated image intensity
Reflection phase (degrees)
40
20
0
−20
−40
−60
−100
−50
0
50
100
Uniform thickness split deviation (%)