


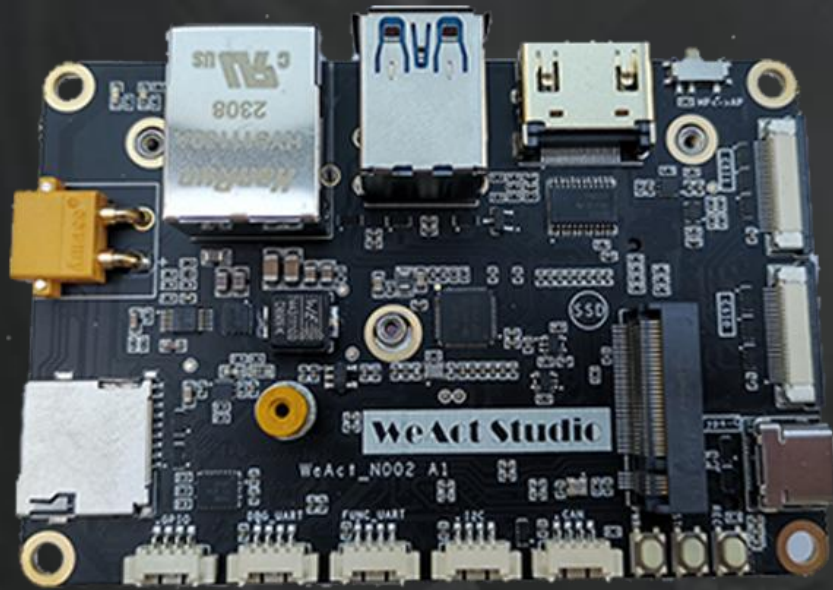

WeAct Studio

WEACT-N002 CARRIER BOARD

Tutorial

Directory

Revision History	3
1. Build a Flash Environment	4
2. Flash System Image.....	7
3. Install NVIDIA Component	9
4. Environment Backup And Image Recovery	11
5. System Migration To NVME SSD ..	14
6. System Migration To SD Card	17
7. Install JTOP (control fan, view system information)	20
8. Using CAN for Communication	21
9. Using GPIO	23
10. Using UART	25
Contact US	26

REVISION HISTORY

Draft Date	Revision	Description
2023.07.16	V1.0	1. Initial
2024.02.16	V2.0	1. Revise 2. Added GPIO Tutorial
2026.07.23	V3.0	1. Added Script 2. Orin Support JP7

1. BUILD A FLASH ENVIRONMENT

- a) First, you need a computer with **Ubuntu 18.04** or above as the host to flash NANO/NX, or you can install VMware on windows.


*Jetpack 6 need Ubuntu20.04 above

*Jetpack 7 need Ubuntu24.04 above

- b) Download the latest SDK manager from NVIDIA and install it in Ubuntu 18.04 (You need to register an NVIDIA account, which will also be used later).


➤ SDK-Manager Link: <https://developer.nvidia.com/nvidia-sdk-manager>

- c) Select the relative **Target Hardware** and **JetPack** version, uncheck the **HostMachine(Save the disk memory)**, take **XavierNX** as an example, and click **continue**.

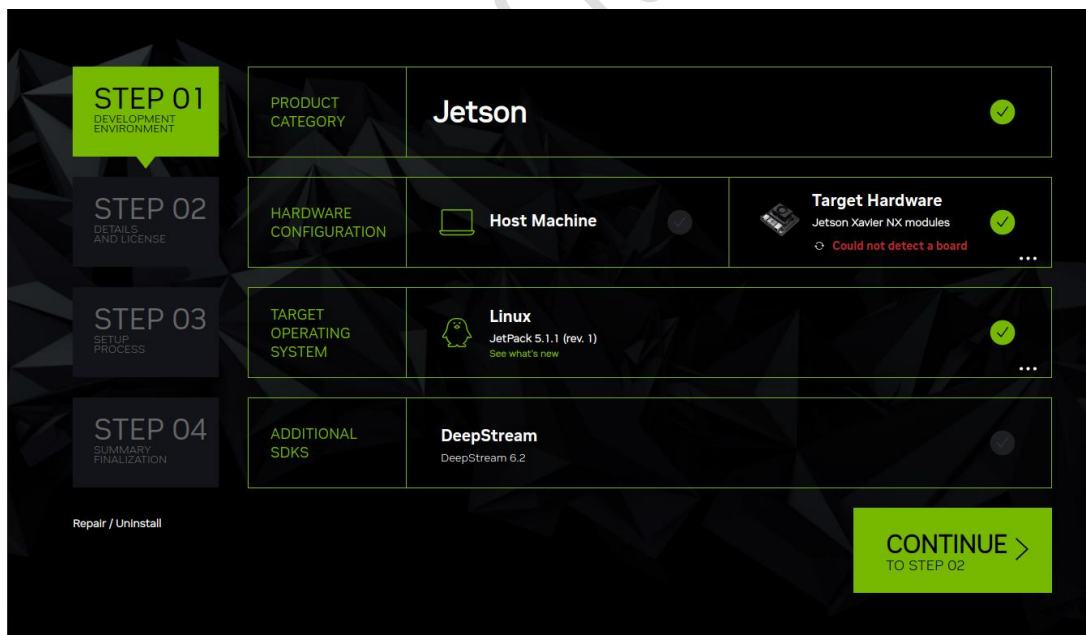




- d) **Check** I accept the terms and conditions of the license agreements, **uncheck** the Jetson SDK components, and click continue to proceed to the next step(SDK will

install in the next chapter independent).

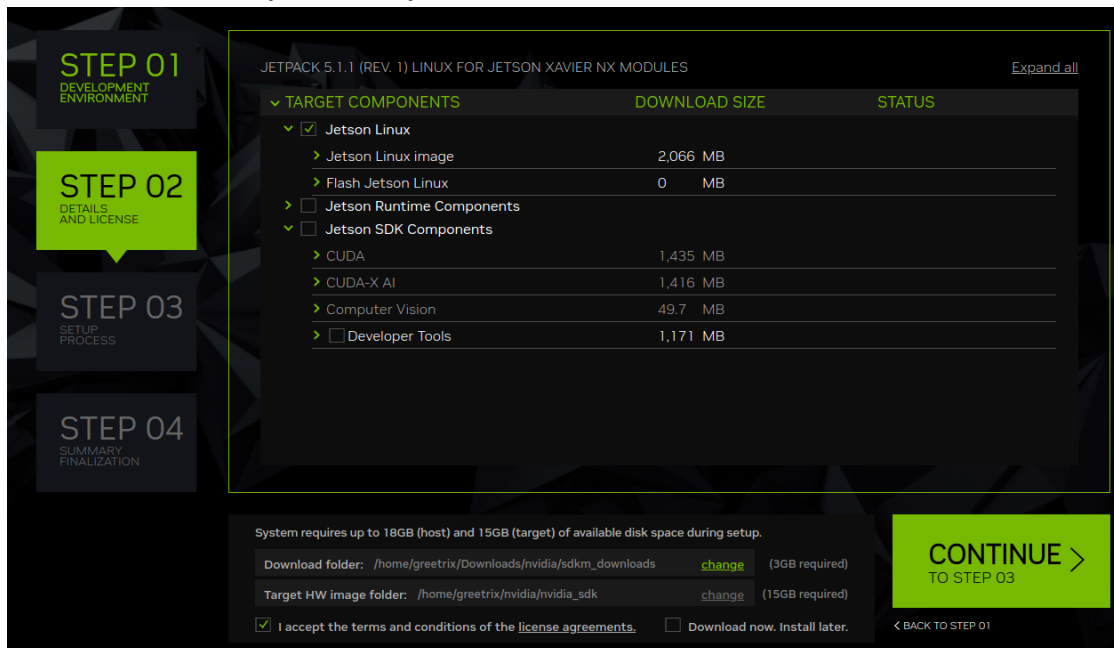


Note: Please download and install in a smooth network environment. When the download or installation fails, click **Retry** to continue until **all the status is installed and green is displayed**. During the installation process, a network burning message will pop up and select **skip**. (We will use the script to flash the system for different core board adaptive but not SDK manager).

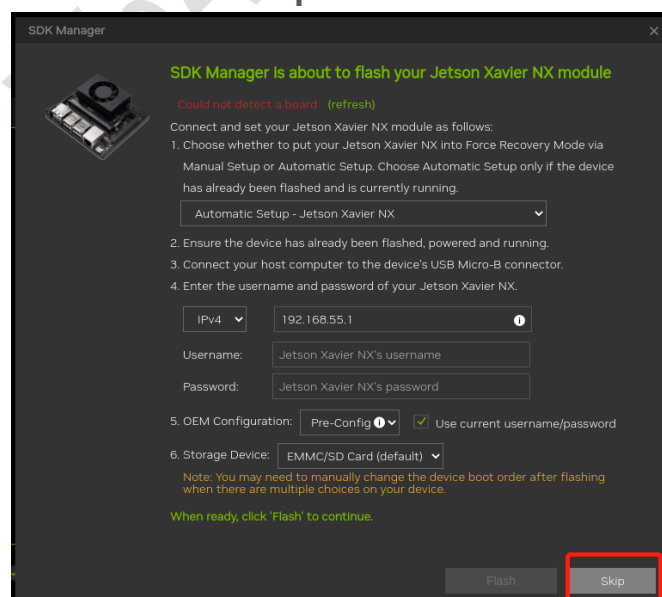




2. FLASH SYSTEM IMAGE

1. Connect **USB Type-C** cable to carrier board **USB Type-C** connector.

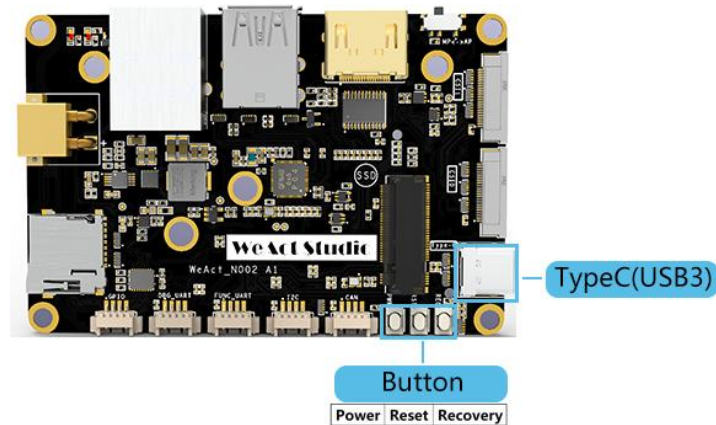

2. Switch slide button to MP (**Manual Power On**), 2 ways enter Recovery mode below:
 - a) Long press **REC** key, press **PWR** to power on, release **REC** key that make the system to enter recovery mode.
 - b) Press **PWR** to power on, long press **REC** Key, press **RST** to enter recovery mode.

NVIDIA USB Driver will appear in the lower right of VMware, or open the terminal and enter **lsusb** command, the NVIDIA Corp will be found and the fan speed will be set to max.

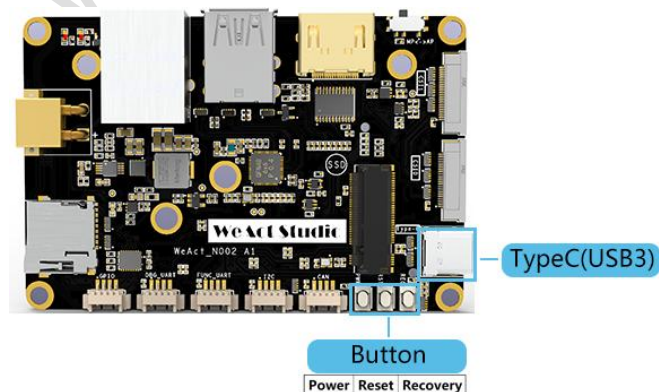

```
XAVIER_NX_TARGETS/Linux_for_Tegra$ lsusb
Bus 004 Device 001: ID 1d6b:0003 Linux Foundation 3.0 root hub
Bus 003 Device 004: ID 0e0f:0002 VMware, Inc. Virtual USB Hub
Bus 003 Device 003: ID 0e0f:0002 VMware, Inc. Virtual USB Hub
Bus 003 Device 006: ID 0955:7e19 NVidia Corp.
Bus 003 Device 002: ID 0e0f:0003 VMware, Inc. Virtual Mouse
Bus 003 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 001 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 002 Device 002: ID 0e0f:0002 VMware, Inc. Virtual USB Hub
Bus 002 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
```

3. Enter `~/nvidia/nvidia_sdk/JetPack_5.1.1_Linux_JETSON_XAVIER_NX_TARGETS/Linux_for_Tegra` (Example with Xavier NX), open terminal:
 - a) `sudo apt-get install git`
 - b) `git clone https://github.com/WeActStudio/WeAct_N002`
 - c) `sudo bash WeAct_N002/04_Script/weact_n002_flash.sh.`

*Orin will be flashed Super Mode default. If you Jetpack version not support Super Mode or you don't want to use super mode. Use `"sudo bash WeAct_N002/04_Script/weact_n002_flash.sh -n"`

*Jetson Xavier NX SD Version and Jetson Nano SD Version, Use `"sudo bash WeAct_N002/04_Script/weact_n002_flash.sh -s"`


Wait the flashing finishing and others CoreBoard flashing command below.

```
File Edit View Search Terminal Help
t.encrypt [ 30416 bytes ]
[ 635.8133 ] [ ..... ] 100%
[ 636.0454 ] tegradevflash_v2 --write MEM_BCT mem_coldboot_sigheader.bct.encrypt
[ 636.0470 ] Bootloader version 01.00.0000
[ 636.0521 ] Writing partition MEM_BCT with mem_coldboot_sigheader.bct.encrypt [
198656 bytes ]
[ 636.0527 ] [ ..... ] 100%
[ 637.4597 ] tegradevflash_v2 --write MEM_BCT_b mem_coldboot_sigheader.bct.encrypt
pt
[ 637.4613 ] Bootloader version 01.00.0000
[ 637.4728 ] Writing partition MEM_BCT_b with mem_coldboot_sigheader.bct.encrypt
[ 198656 bytes ]
[ 637.4734 ] [ ..... ] 100%
[ 638.8778 ] Flashing completed


[ 638.8779 ] Coldbooting the device
[ 638.8825 ] tegrarcm_v2 --ismb2
[ 638.9047 ] tegradevflash_v2 --reboot coldboot
[ 638.9059 ] Bootloader version 01.00.0000
**t The target t186ref has been flashed successfully. ***
Reset the board to boot from internal eMMC.
```


3. INSTALL NVIDIA COMPONENT


1. Select the relative **Target Hardware** and **JetPack** version, **uncheck** **HostMachine**, take **XavierNX** as an example, and click **continue**.

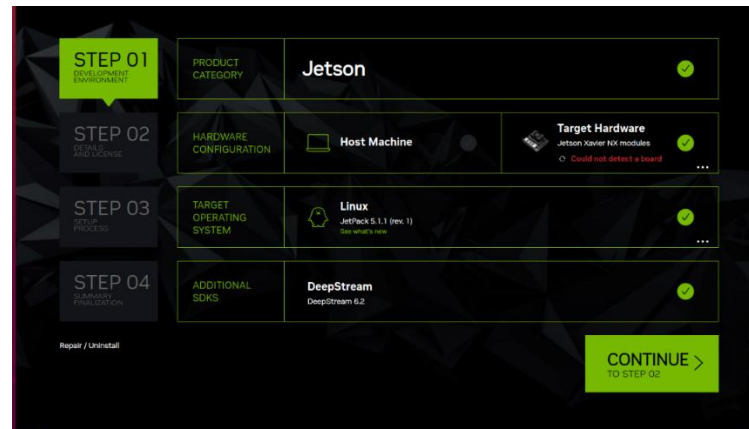


2. Check the **required SDK components**, check **I accept the terms and conditions of the license agreements**, and click **continue** to proceed to the next step.

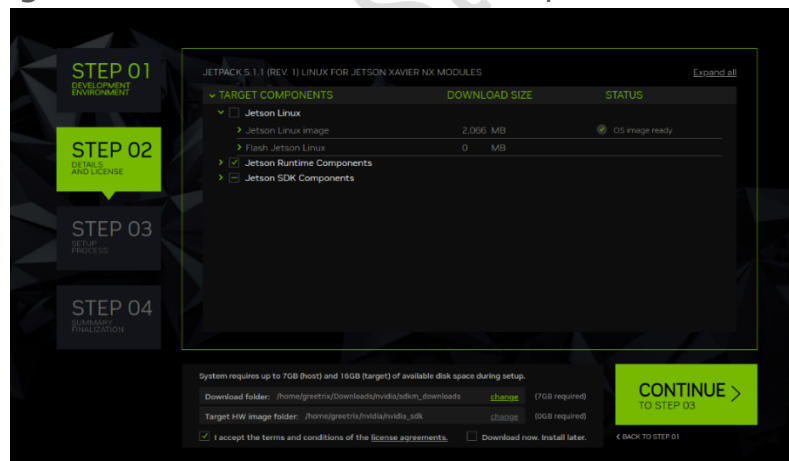

3. Use the **USB Type-C** cable to connect the USB Type-C connector.

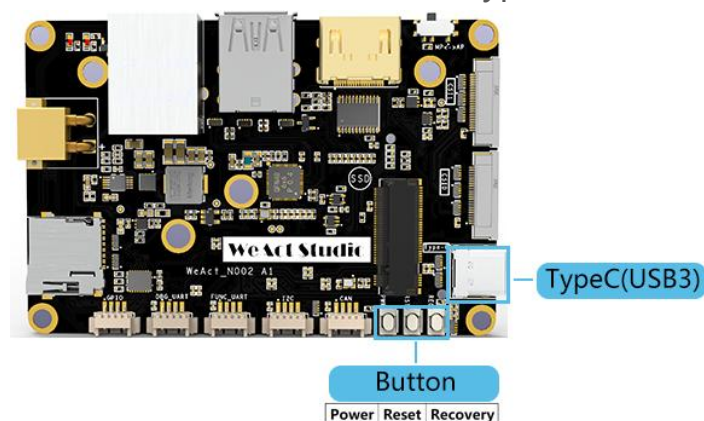

4. Turn the **power on key to MP(manual power on)** and press **PWR** key to power on. At this time, **NVIDIA USB drive sign** will appear in the lower right corner of VMware, or open the terminal and enter **lsusb** command to find **NVIDIA Corp.**
5. Enter the **Xavier NX** account and password. **Please keep the Xavier NX connected to the internet or use an IP from the same local area network** (as shown below, the host and Xavier NX are connected to the same router).

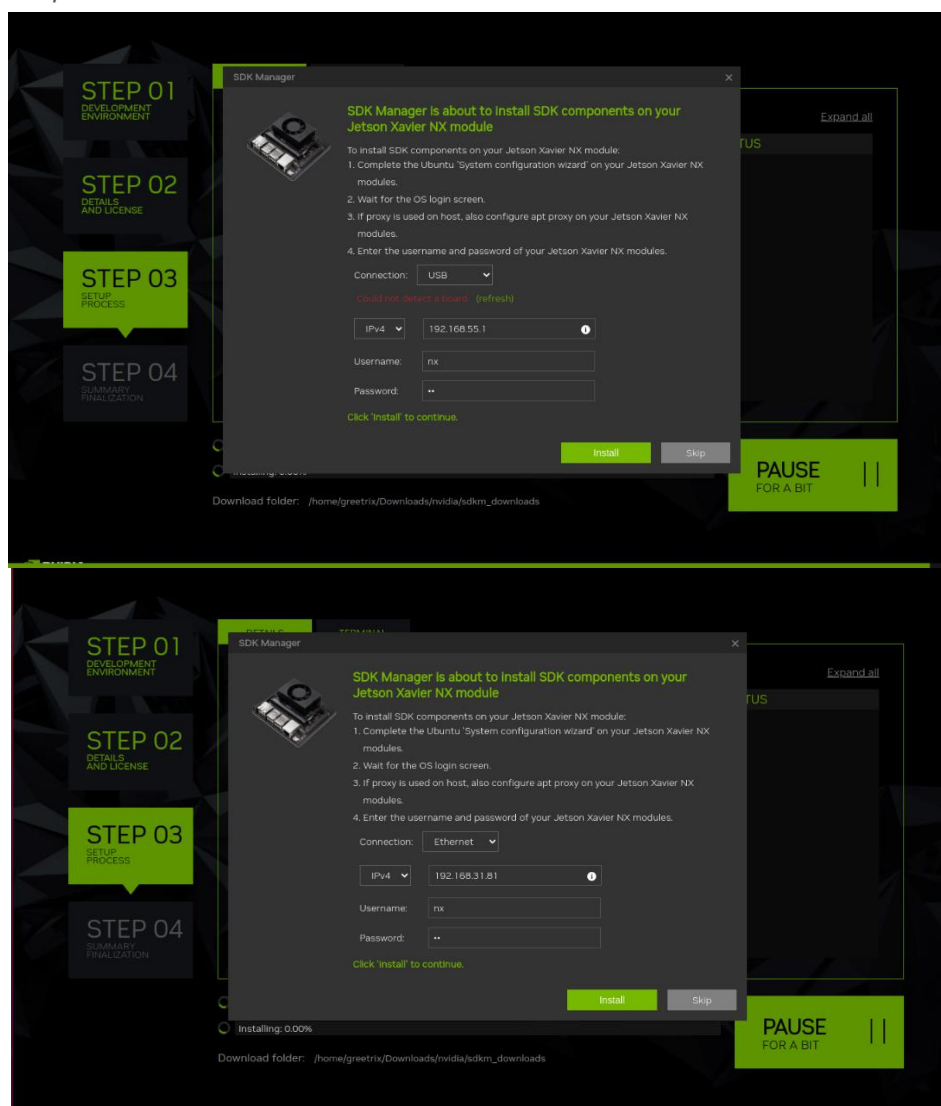

6. Wait for the installation to complete.

4. ENVIRONMENT BACKUP AND IMAGE RECOVERY

***Note: This backup only for Jetson Nano/TX2NX/XavierNX**

1. System install in EMMC, take an example with TX2NX

- a) Referring to Chapter 2, whether it is backup or image burning, enter Recovery mode and note that the image is large. Please ensure that Ubuntu has sufficient space (>40GB).
- b) **Backup:** Taking TX2NX as an example (for other devices, please refer to the previous chapter to modify the Jetson name), backup the existing environment of the core board. Enter `~/nvidia/nvidia_sdk/JetPack_4.6-Linux_JETSON-TX2-TARGETS/Linux_for-Tegra`, and open the terminal

Using the mirror backup command: **`sudo ./flash.sh -r -k APP -G backup.img jetson-xavier-nx-devkit-tx2-nx mmcblk0p1`**, wait for the backup to complete. At this time, there will be a backup.img image in the directory (it is recommended to copy a copy to another location for backup), and the **backup has been successful**.

```
greetrix@greetrix-virtual-machine:~/nvidia/nvidia_sdk/JetPack_4.6-Linux_JETSON-TX2-TARGETS/Linux_for-Tegra$ sudo ./flash.sh -r -k APP -G backup.img jetson-xavier-nx-devkit-tx2-nx mmcblk0p1
```

```

[ 9.1920 ] tegrarcv2 --boot recovery
[ 9.1966 ] Applet version 01.00.0000
[ 9.3692 ]
[ 10.3763 ] tegrarcv2 --isapplet
[ 10.3793 ] USB communication failed.Check if device is in recovery
[ 10.5068 ]
[ 10.8536 ] tegradevflash_v2 --iscpubl
[ 10.8565 ] Cannot Open USB
[ 11.3572 ]
[ 12.3617 ] tegrarcv2 --isapplet
[ 12.5109 ]
[ 12.5142 ] tegradevflash_v2 --iscpubl
[ 12.5163 ] Bootloader version 01.00.0000
[ 12.6843 ] Bootloader version 01.00.0000
[ 12.7463 ]
[ 12.7464 ] Reading partition
[ 12.7492 ] tegradevflash_v2 --read APP /home/greetrix/nvidia/nvidia_sdk/JetPack_4.6_Linux_JETSON_TX2_TARGETS/Linux_for_Tegra/backup.img
[ 12.7511 ] Bootloader version 01.00.0000
[ 12.9183 ] [.....] 100%
[ 2216.5426 ]
*** The [APP] has been read successfully. ***
Converting RAW image to Sparse image... greetrix@greetrix-virtual-machin
X2_TARGETS/Linux_for_Tegra$ 4.6 Linux JETSON TX

```

c) **Image Recovery:** Enter `~/nvidia_sdk/JetPack_4.6_Linux_JETSON_TX2_TARGETS/Linux_for_Tegra`, Copy the backup.img to Liunx_for_Tegra/bootloader /, and rename to system.img, back to the Linux_for_Tegra directory, open the terminal:

Use the flash command: **sudo ./flash.sh -r jetson-xavier-nx-devkit-tx2-nx m mcb1k0p1**, wait it to finish.

```

[ 18.0000 ] Writing partition spe-fw_b with spe_sigheader.bin.encrypt
[ 18.0298 ] [.....] 100%
[ 18.0790 ] Writing partition mb2 with nvtboot_sigheader.bin.encrypt
[ 18.1057 ] [.....] 100%
[ 18.1596 ] Writing partition mb2_b with nvtboot_sigheader.bin.encrypt
[ 18.1895 ] [.....] 100%
[ 18.2416 ] Writing partition mts-preboot with preboot_d15_prod_cr_sigheader.bi
n.encrypt
[ 18.2710 ] [.....] 100%
[ 18.6760 ] Writing partition mts-preboot_b with preboot_d15_prod_cr_sigheader.
bin.encrypt
[ 18.7053 ] [.....] 100%
[ 18.7467 ] Writing partition SMD with slot_metadata.bin
[ 18.7744 ] [.....] 100%
[ 18.9037 ] Writing partition SMD_b with slot_metadata.bin
[ 18.9302 ] [.....] 100%
[ 18.9658 ] Writing partition VER_b with emmc_bootblob_ver.txt
[ 18.9922 ] [.....] 100%
[ 19.0322 ] Writing partition VER with emmc_bootblob_ver.txt
[ 19.0592 ] [.....] 100%
[ 19.0966 ] Writing partition master_boot_record with mbr_1_3.bin
[ 19.1194 ] [.....] 100%
[ 19.1525 ] Writing partition APP with system.img
[ 19.1800 ] [.....] 016%

```

```

t.encrypt
[ 1888.6372 ] Bootloader version 01.00.0000
[ 1888.8013 ] Writing partition MB1_BCT with mb1_cold_boot_bct_MB1_sigheader.b
t.encrypt
[ 1888.8019 ] [.....] 100%
[ 1888.8706 ]
[ 1888.8837 ] tegradevflash_v2 --write MB1_BCT_b mb1_cold_boot_bct_MB1_sighead
bct.encrypt
[ 1888.8849 ] Bootloader version 01.00.0000
[ 1889.0452 ] Writing partition MB1_BCT_b with mb1_cold_boot_bct_MB1_sigheader
t.encrypt
[ 1889.0468 ] [.....] 100%
[ 1889.1180 ]
[ 1889.1181 ] Flashing completed

[ 1889.1181 ] Coldbooting the device
[ 1889.1436 ] tegradevflash_v2 --reboot coldboot
[ 1889.1449 ] Bootloader version 01.00.0000
[ 1889.3379 ]
*** The target t186ref has been flashed successfully. ***
Reset the board to boot from internal eMMC.

```

2. For devices installed on SD cards or SSDs, simply copy the SD card or SSD directly from the host to other storage media.

WeAct Studio

5. SYSTEM MIGRATION TO NVME SSD

Note: This migration only used in Nano/TX2NX/XavierNX

WeAct-N002 carrier board support PCIE3.0 X 4 slot, support 2242 NVME SSD M.2 interfaces SSD

a) NVME Solid HardDisk Configuration:

- 1. Before configuration, ensure that the system can recognize the nvme SSD.

The terminal command is **sudo fdisk -lu**.

```
Disk /dev/nvme0n1: 119.2 GiB, 128035676160 bytes, 250069680 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: gpt
```

- 2. Set the NVME with GPT format:

- i. Command: **sudo parted /dev/nvme0n1**, enter the parted.

```
tx2nx@tx2nx:~$ sudo parted /dev/nvme0n1
[sudo] password for tx2nx:
GNU Parted 3.2
Using /dev/nvme0n1
Welcome to GNU Parted! Type 'help' to view a list of commands.

(parted) █
```

- ii. Command: **mklabel gpt**, make the label with **GPT** format.

```
(parted) mklabel gpt
Warning: The existing disk label on /dev/nvme0n1 will be destroyed and all data on this disk will be lost. Do you want to continue?
Yes/No? Yes █
```

- iii. Command: **mkpart logical 0 -1**, make the **part** with GPT format.

```
(parted) mkpart logic 0 -1
Warning: The resulting partition is not properly aligned for best performance.
Ignore/Cancel? Ignore █
```

- iv. Command: **print**, see the result.

```
(parted) print
Model: KBG40ZNS128G NVMe TOSHIBA 128GB (nvme)
Disk /dev/nvme0n1: 128GB
Sector size (logical/physical): 512B/512B
Partition Table: gpt
Disk Flags:

Number  Start   End     Size    File system  Name  Flags
  1      17.4kB  128GB   128GB                   logic
```

- v. Command: **quit**

- vi. Command: **sudo fdisk /dev/nvme0n1**

```
(parted) quit
Information: You may need to update /etc/fstab.

tx2nx@tx2nx:~$ sudo fdisk /dev/nvme0n1

Welcome to fdisk (util-linux 2.31.1).
Changes will remain in memory only, until you decide to write them.
Be careful before using the write command.

Command (m for help):
```

- vii. Command: Enter **N**, add new part, Enter next.

```
Command (m for help): n
Partition number (2-128, default 2): 2
First sector (250067728-250069646, default 250068992):
Last sector, +sectors or +size{K,M,G,T,P} (250068992-250069646, default 250069646):

Created a new partition 2 of type 'Linux filesystem' and of size 327.5 KiB.
```

- viii. Command: Enter **P**, check the filesystem status.

Device	Start	End	Sectors	Size	Type
/dev/nvme0n1p1	34	250067727	250067694	119.2G	Linux filesystem
/dev/nvme0n1p2	250068992	250069646	655	327.5K	Linux filesystem

- ix. Command: **quit**

- x. Command: **sudo mke2fs -t ext4 /dev/nvme0n1p1**, format the part

```
tx2nx@tx2nx:~$ sudo mke2fs -t ext4 /dev/nvme0n1p1
mke2fs 1.44.1 (24-Mar-2018)
/dev/nvme0n1p1 contains a ext4 file system
        last mounted on / on Sun Dec 26 11:04:07 2021
Proceed anyway? (y,N)
```

- xi. Command: **sudo mount /dev/nvme0n1p1 /mnt**, if success, configurate NVME ok

```
tx2nx@tx2nx:~$ sudo mount /dev/nvme0n1p1 /mnt
tx2nx@tx2nx:~$
```

b) NVIDIA Jetson system migration

- ✓ Taking tx2nx as an example, other devices can replace the device name in the middle of the command, and the device name can refer to the above command
- 1. Command: **git clone <https://github.com/jetsonhacks/rootOnNVMe>** or **<https://github.com/jetsonhacks/rootOnNVMe>**, download the script

- 2. Go to **rootOnNVMe** directory, command: **./copy-rootfs-ssd.sh**, copy system file to NVME SSD.

```
tx2nx@tx2nx:/home/script/rootOnNVMe-master$ ./copy-rootfs-ssd.sh
mount: /mnt: /dev/nvme0n1p1 already mounted on /mnt.
17,380,838 0% 2.40MB/s 0:00:06 (xfr#39, ir-chk=1015/44887)
```

- 3. Command: **./setup-service.sh** configure the boot options.

```
tx2nx@tx2nx:/home/script/rootOnNVMe-master$ ./setup-service.sh
==== AUTHENTICATING FOR org.freedesktop.systemd1.reload-daemon ====
Authentication is required to reload the systemd state.
Authenticating as: tx2nx,, (tx2nx)
Password: Failed to reload daemon: Method call timed out
polkit-agent-helper-1: pam_authenticate failed: Authentication failure
Created symlink /etc/systemd/system/default.target.wants/setssdroot.service → /etc/systemd/system/setssdroot.service.
Service to set the rootfs to the SSD installed.
Make sure that you have copied the rootfs to SSD.
Reboot for changes to take effect.
```

- 4. Refer to chapter 2 and enter the **Recovery Mode**.
- 5. (The flash environment of Ubuntu, Refer to last chapter), enter **~/nvidia/nvidia_sdk/JetPack_4.6_Linux_JETSON_TX2_TARGETS/Linux_for_Tegra**, command: **sudo ./flash.sh jetson-xavier-nx-devkit-tx2-nx nvme0n1p1** update the EMMC boot.

```
greetrix@greetrix-virtual-machine:~/nvidia/nvidia_sdk/JetPack_4.6_Linux_JETSON_TX2_TARGETS/Linux_for_Tegra$ sudo ./flash.sh jetson-xavier-nx-devkit-tx2-nx nvme0n1p1
```

```
[ 37.3739 ] Coldbooting the device
[ 37.3775 ] tegradeflash_v2 --reboot coldboot
[ 37.3788 ] Bootloader version 01.00.0000
[ 37.5711 ]
*** The target t186ref has been flashed successfully. ***
Make the target filesystem available to the device and reset the board to boot from external nvme0n1p1.
```

- 6. Reboot the TX2NX, Command: **df -l**, now the boot storage space change to SSD.

```
tx2nx@tx2nx:~$ df -l
Filesystem      1K-blocks    Used Available Use% Mounted on
/dev/nvme0n1p1 122547172 11949920 104329176 11% /
none            1578060      0    1578060  0% /dev
tmpfs           1962748      52    1962696  1% /dev/shm
tmpfs           1962748    20764    1941984  2% /run
tmpfs            5120         4        5116  1% /run/lock
tmpfs           1962748      0    1962748  0% /sys/fs/cgroup
tmpfs           392548      12     392536  1% /run/user/120
tmpfs           392548      0     392548  0% /run/user/1000
```


6. SYSTEM MIGRATION TO SD CARD

***Note:** This migration only used in Nano/TX2NX/XavierNX

a) SD Card Configuration:

1. Make sure the system can recognize the SD card, command: **sudo fdisk -lu**

```
Disk /dev/mmcblk1: 59.5 GiB, 63864569856 bytes, 124735488 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
```

2. Set the SD with **GPT** format:

- i. Command: **sudo fdisk /dev/mmcblk1**, enter the SD card configuration.

```
tx2nx@tx2nx:~/Desktop$ sudo fdisk /dev/mmcblk1

Welcome to fdisk (util-linux 2.31.1).
Changes will remain in memory only, until you decide to write them.
Be careful before using the write command.
```

- ii. Command: **g**, new a GPT disk label.

```
Command (m for help): g
Created a new GPT disklabel (GUID: E39DF30E-48FE-B041-A6FA-5EFAEC223CEA).
```

- iii. Command: **n**, new partition, enter next.

```
Command (m for help): n
Partition number (1-128, default 1):
First sector (2048-124735454, default 2048):
Last sector, +sectors or +size{K,M,G,T,P} (2048-124735454, default 124735454):
```

- iv. Command: **w**, save the configuration.

```
Command (m for help): w
The partition table has been altered.
Calling ioctl() to re-read partition table.
Syncing disks.
```

- v. Command: **sudo mke2fs -t ext4 /dev/mmcblk1p1**, format the partition.

```

nx@nx-desktop:~$ sudo mke2fs -t ext4 /dev/mmcblk1p1
mke2fs 1.45.5 (07-Jan-2020)
Discarding device blocks: done
Creating filesystem with 15591675 4k blocks and 3899392 inodes
Filesystem UUID: fd266d8c-21ae-4dbd-89a6-6e5cd0f6be67
Superblock backups stored on blocks:
    32768, 98304, 163840, 229376, 294912, 819200, 884736, 1605632, 26542
    08,
    4096000, 7962624, 11239424
Allocating group tables: done
Writing inode tables: done
Creating journal (65536 blocks): done
Writing superblocks and filesystem accounting information: done

```

vi. Command: **sudo mount /dev/mmcblk1p1 /mnt**

```

tx2nx@tx2nx:~/Desktop$ sudo mount /dev/mmcblk1p1 /mnt

```

b) NVIDIA Jetson system migration

- ✓ Taking tx2nx as an example, other devices can replace the device name in the middle of the command, and the device name can refer to the above command
- 1. Command: **git clone <https://github.com/jetsonhacks/rootOnNVMe>** or **<https://github.com/jetsonhacks/rootOnNVMe>** download the script
- 2. Modify **copy-rootfs-ssd.sh**, comment the mount command.

```

#!/bin/bash
# Mount the SSD as /mnt
# Sudo mount /dev/nvme0n1p1 /mnt
# Copy over the rootfs from the SD card to the SSD
sudo rsync -axHAXX --numeric-ids --info=progress2 --exclude={"/dev/", "/proc/", "/sys/", "/tmp/",
"/run/", "/mnt/", "/media/", "/lost+found"} / /mnt
# We want to keep the SSD mounted for further operations
# So we do not unmount the SSD

```

- 3. Enter **rootOnNVMe** directory, Command: **./copy-rootfs-ssd.sh**, copy the system file to SD card.

```

nx@nx-desktop:~/rootOnNVMe$ sudo bash ./copy-rootfs-ssd.sh
276,613,277 37% 50.12MB/s 0:00:05 (xfr#2089, ir-chk=1622/4960)

```

- 4. Refer to chapter 2 and enter **recovery mode**.
- 5. Enter **~/nvidia/nvidia_sdk/JetPack_4.6_Linux_JETSON_TX2_TARGETS/Linux_for_Tegra**, open the terminal:

Replace the previous chapter with the corresponding flash command
mmcblk0p1 to mmcblk1p1 and update the EMMC bootloader.

- ◆ **TX2NX-EMMC:** **sudo ./flash.sh jetson-xavier-nx-devkit-tx2-nx mmcbl
k1p1**

```
greetrix@greetrix-virtual-machine:~/nvidia/nvidia_sdk/JetPack_4.6_Linux_JETSON_T
X2_TARGETS/Linux_for_Tegra$ sudo ./flash.sh jetson-xavier-nx-devkit-tx2-nx mmcbl
k1p1
[ 30.4511 ] Coldbooting the device
[ 30.4521 ] tegradeflash_v2 --reboot coldboot
[ 30.4531 ] Bootloader version 01.00.0000
[ 30.6253 ]
*** The target t186ref has been flashed successfully. ***
Make the target filesystem available to the device and reset the board to boot f
rom external mmcblk1p1.
```

- 6. Reboot TX2NX, terminal command: **df -l**, At this point, the system disk has become an SD card, and the system on the original EMMC has been successfully migrated.

```
tx2nx@tx2nx:~$ df -h
Filesystem      Size  Used Avail Use% Mounted on
/dev/mmcblk1p1  59G   12G   44G   21% /
devtmpfs         1.6G     0   1.6G    0% /dev
tmpfs            1.9G   52K   1.9G    1% /dev/shm
tmpfs            1.9G   21M   1.9G    2% /run
tmpfs            5.0M   4.0K   5.0M    1% /run/lock
tmpfs            1.9G     0   1.9G    0% /sys/fs/cgroup
tmpfs            384M   12K   384M    1% /run/user/120
tmpfs            384M     0   384M    0% /run/user/1000
```

7. INSTALL JTOP (CONTROL FAN, VIEW SYSTEM INFORMATION)

1. Open the terminal, install using the following command Jtop
 - a) `sudo apt-get install python3-pip python3-dev -y`
 - b) `sudo -H pip3 install jetson-stats`
 - c) `sudo systemctl restart jtop.service`
 - d) `sudo jtop`

```
Model: NVIDIA Jetson Xavier NX Developer Kit - Jetpack 5.1.1 [L4T 35.3.1]
1  [|||||] 15.0% 1.2GHz 4 [|||||] 10.0% 1.2GHz
2  [|||] 3.0% 1.2GHz 5 [OFF] 1.2GHz
3  [|||] 9.8% 1.2GHz 6 [OFF] 1.2GHz
Mem [|||||] 650M/6.7G FAN [|||||] 51.0% 4103RPM
Swp [|||||] 0k/3.3G Jetson Clocks: inactive
Emc [204MHz] 1.6GHz 0% NV Power[5]: MODE_10W_DESKTOP
Uptime: 0 days 0:8:46

GPU [|||||] 0.0% 114MHz
Dsk [|||||] 5.7G/13.7G

PID USER GPU TYPE PRI S CPU% MEM [GPU MEM] Command
1584 root I G 20 S 0.2 9.7M 17.5M Xorg
1717 root I G 20 S 1.2 35.2M 5.8M gnome-shell
1998 nx I G 20 S 0.0 8.1M 0k goa-daemon
1647 gdm I G 20 S 0.0 8.1M 0k goa-daemon
1001 root I G 20 S 0.0 2.7M 0k nvargus-daemon

[HW engines] [Sensor] [Temp] [Power] [Inst] [Avg]
APE: [OFF] CVMAS: [OFF] AO 45.00C CPU GPU CV 476mW 495mW
DLA0c: [OFF] DLA1c: [OFF] AUX 44.50C SOC 752mW 751mW
NVENC: [OFF] NVDEC: [OFF] CPU 45.50C VDD_IN 2.6W 2.6W
NVJPG: [OFF] PVA0a: [OFF] GPU 44.50C
SE: [OFF] VIC: [OFF] iwlwifi 55.00C
thermal 44.85C

1ALL 2GPU 3CPU 4MEM 5ENG 6CTRL 7INFO Quit (c) 2023, RB
```

2. Click on 6CTRL to manually control the fan speed and power scheme.

```
Model: NVIDIA Jetson Xavier NX Developer Kit - Jetpack 5.1.1 [L4T 35.3.1]
PWMFAN 0 PWM 80% - 6240RPM Speed [-] [+]

Profiles:
[quiet]
[cool]
[manual]

Jetson Clocks: [s] inactive on boot:[e] disable
NVP modes: [-] 8 [+]
[MODE_15W_2CORE]
[MODE_15W_4CORE]
[MODE_15W_6CORE]
[MODE_10W_2CORE]
[MODE_10W_4CORE]
D [MODE_10W_DESKTOP]
[MODE_20W_2CORE]
[MODE_20W_4CORE]
[MODE_20W_6CORE]

[Name] [Power] [Volt] [Curr] [Warn] [Crit]
VDD_CPU_GPU_CV 476mW 5.0V 96mA 32.8A 32.8A
VDD_SOC 713mW 5.0V 144mA 32.8A 32.8A
VDD_IN 2.5W 5.0V 512mA 4.0A 5.0A

1ALL 2GPU 3CPU 4MEM 5ENG 6CTRL 7INFO Quit (c) 2023, RB
```

8. USING CAN FOR COMMUNICATION

1. TX2-NX/XavierNX/OrinNX/OrinNano integrates one CAN controller CAN0, and WeAct Studio has designed one CAN transceiver (CAN0) on the carrier board, which can be directly mounted on the CAN physical bus for use.
2. TX2-NX/XavierNX/OrinNX/OrinNano comes with a canbus driver and is integrated into the image, supporting canbus without further processing. We need to install the canbus module. (Enter the following command on the terminal or put it into rc.local to enable self start)

```
modprobe can
modprobe can-raw
modprobe can-bcm
modprobe can-gw
modprobe can_dev
modprobe mttcan
```

3. Check if the installation was successful through **lsmod**.

```
nvidia@localhost:~$ lsmod
Module                  Size  Used by
fuse                    103841  2
mttcan                   66251  0
can_dev                 13306  1 mttcan
can_gw                   10919  0
can_bcm                  16471  0
can_raw                  10388  0
can                      46600  3 can_raw,can_bcm,can_gw
zram                     26166  6
overlay                  48691  0
bcmhdhd                  934274  0
cfg80211                 589351  1 bcmhdhd
spidev                   13282  0
nvgpu                   1575721  20
bluedroid_pm             13912  0
ip_tables                19441  0
x_tables                 28951  1 ip_tables
```

- ```
sudo ip link set can0 type can bitrate 500000
sudo ip link set up can0
```

- ```
nvidia@localhost:~$ ifconfig
can0: flags=193<UP,RUNNING,NOARP> mtu 16
    unspec 00-00-00-00-00-00-00-00-00-00-00-00-00-00-00 txqueuelen 10 (UNSPEC)
    RX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
    device interrupt 131
```

- [illegible]

9. USING GPIO

1. Jetson Nano/TX2NX/Xavier NX/OrinNo/OrinNX can directly control GPIO input and output through shell commands.

Jetpack 4

	Nano	TX2NX	Xavier NX
GPIO1	gpiochip0[149]	gpiochip0[105]	gpiochip0[133]
GPIO2	gpiochip0[216]	gpiochip0[76]	gpiochip0[148]
GPIO3	gpiochip0[194]	gpiochip0[18]	gpiochip1[20]
GPIO4	gpiochip0[38]	gpiochip0[13]	gpiochip0[105]

Jetpack 5

	XavierNX	Orin Nano/Orin NX
GPIO1	gpiochip1[105]	gpiochip0[105]
GPIO2	gpiochip1[118]	gpiochip0[144]
GPIO3	gpiochip2[16]	gpiochip0[85]
GPIO4	gpiochip1[84]	gpiochip0[43]

Jetpack 6/7

	Orin Nano/Orin NX
GPIO1	gpiochip0[105]
GPIO2	gpiochip0[144]
GPIO3	gpiochip0[85]
GPIO4	gpiochip0[43]

	Nano	TX2NX	XavierNX	OrinNano&OrinNX
GPIO1	PS.05[149]	PN.01[425]	PQ.05[440]	PQ.05[453]
GPIO2	PBB.00[216]	PJ.04[396]	PS.04[453]	PAC.06[492]
GPIO3	PY.02[194]	PC.02[338]	PCC.04[321]	PN.01[433]
GPIO4	PE.06[38]	PU.05[269]	PN.01[419]	PH.00[391]

Example with Orin NX Jetpack 7 GPIO1, gpiochip0 is Chip Group ID, 105 is GPIO Number

2. Install gpod/libgpod-dev
 - a) `sudo apt-get install gpod`
 - b) `sudo apt-get install libgpod-dev`
3. GPIO Usage
 - a) Set High Level: `sudo gpiowrite gpiochip0 105=1`
 - b) Set Low Level: `sudo gpiowrite gpiochip0 105=0`
 - c) Read IO : `sudo gpioread gpiochip0 105`

10. USING UART

Jetpack 4

	Nano	TX2NX	Xavier NX
FUNC_UART	ttyTHS1	ttyTHS2	ttyTHS0

Jetpack 5

	Orin Nano/Orin NX	Xavier NX
FUNC_UART	ttyTHS0	ttyTHS0

Jetpack 6/7

	Orin Nano/Orin NX
FUNC_UART	ttyTHS1

1. Install cutecom/minicom to use UART:
 - a) sudo apt-get install cutecom
 - b) sudo apt-get install minicom

CONTACT US

1. Github: <https://github.com/WeActTC>
2. Aliexpress:
<https://pt.aliexpress.com/item/1005006558131261.html?spm=a2g0o.detail.1000023.1.1572Oc5yOc5yOi>

WeAct Studio