


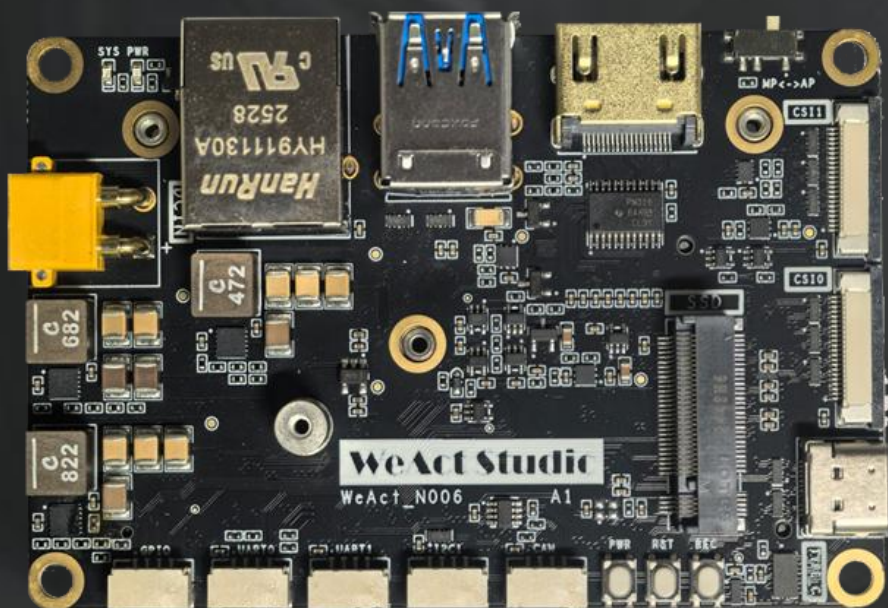

WeAct Studio

N006

载板/底板

使用教程

WEAct Studio

目录

Revision History	3
1. 搭建烧写环境	4
2. 核心板烧写系统	8
3. 安装 NVIDIA 组件	12
3. 备份和恢复系统	15
4. 安装 JTOP (控制风扇, 查看系统信息)	17
5. 使用 CAN 进行通信	18
6. GPIO 在 SHELL 中的使用	20
7. UART/I2C/CSI 的使用	21
联系我们	24

REVISION HISTORY

Draft Date	Revision	Description
2026.02.24	V1.0	1. 初始版本
2026.06.07	V1.1	1. 支持 Jetpack7.x

1. 搭建烧写环境

- a) 首先，需要一台装有 **Ubuntu20.04** 以上的电脑作为 HOST 端给 OrinNX 烧写系统，或者可以在 Windows 上安装 VMware 来实现。

***如果需要烧录 Jetpack 7.x，需要 Ubuntu24.04 电脑作为 HOST**

- VMware 上如何安装 Ubuntu20.04:


<https://cloud.tencent.com/developer/article/2157601>


- b) 在 NVIDIA 下载最新的 **SDK-Manager** 并在 ubuntu20.04 中安装（需要注册一个 NVIDIA 账号，后面也需要用到）

- SDK-Manager 下载地址: <https://developer.nvidia.com/nvidia-sdk-manager>


- c) 选择需要 **Target Hardware** 以及 **JetPack** 版本，**不勾选 Host Machine**（节省主机存储空间），DeepStream/GXF Runtime 根据组件需求勾选，这里以 **Jetpack6.2.2** 版本为例选择，点击 **Continue**

***对于 Jetpack 7.x，选择 Direct Flash**


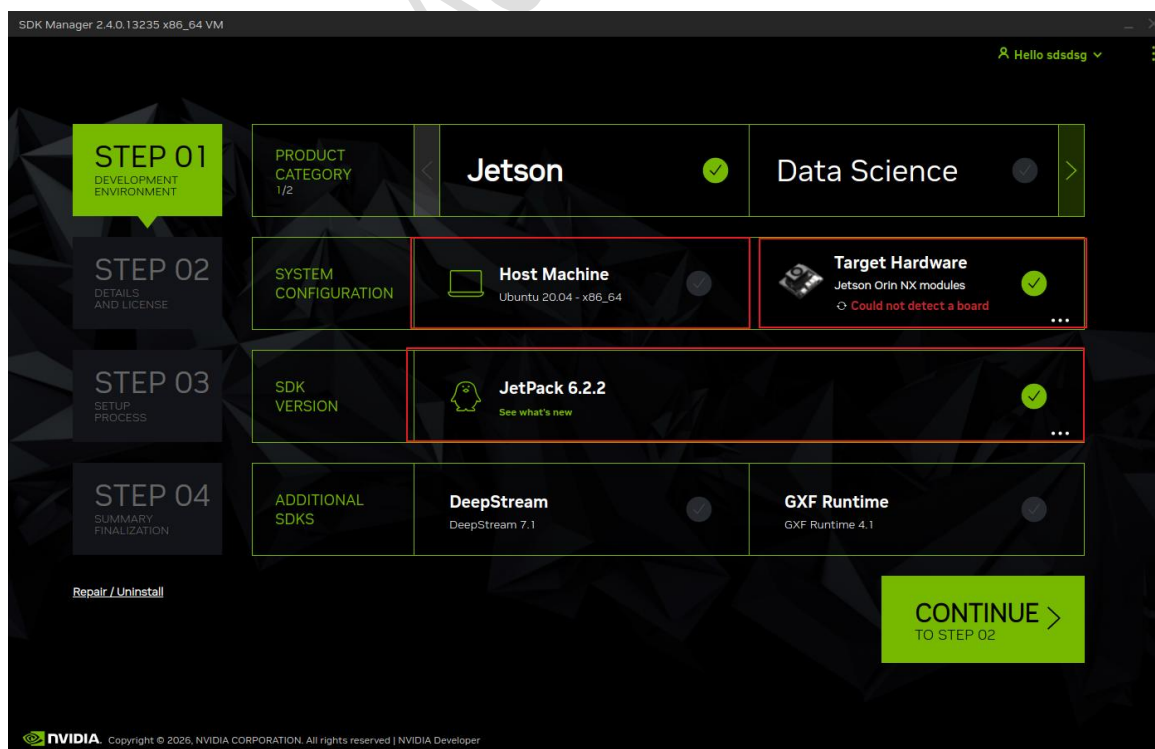


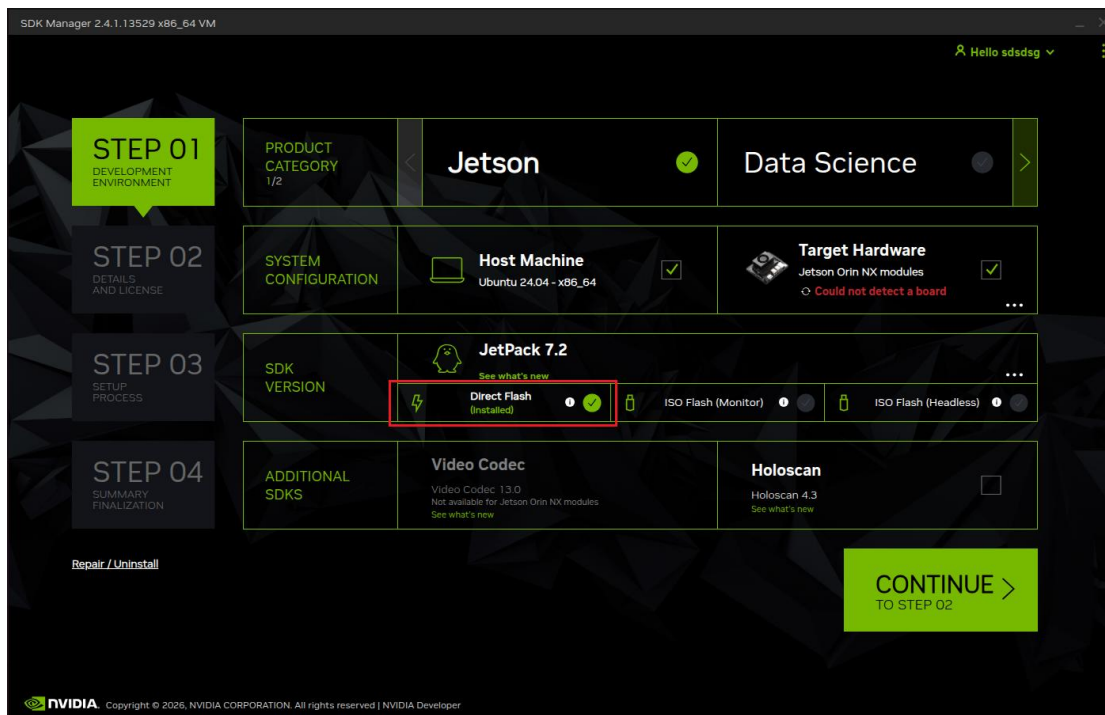


- d) 这里只勾选 **Jetson Linux**，取消勾选 **Jetson Runtime/SDK Components/Platform Services**（后面安装组件会重新下载并一起安装），点击 **CONTINUE** 进行下一步。

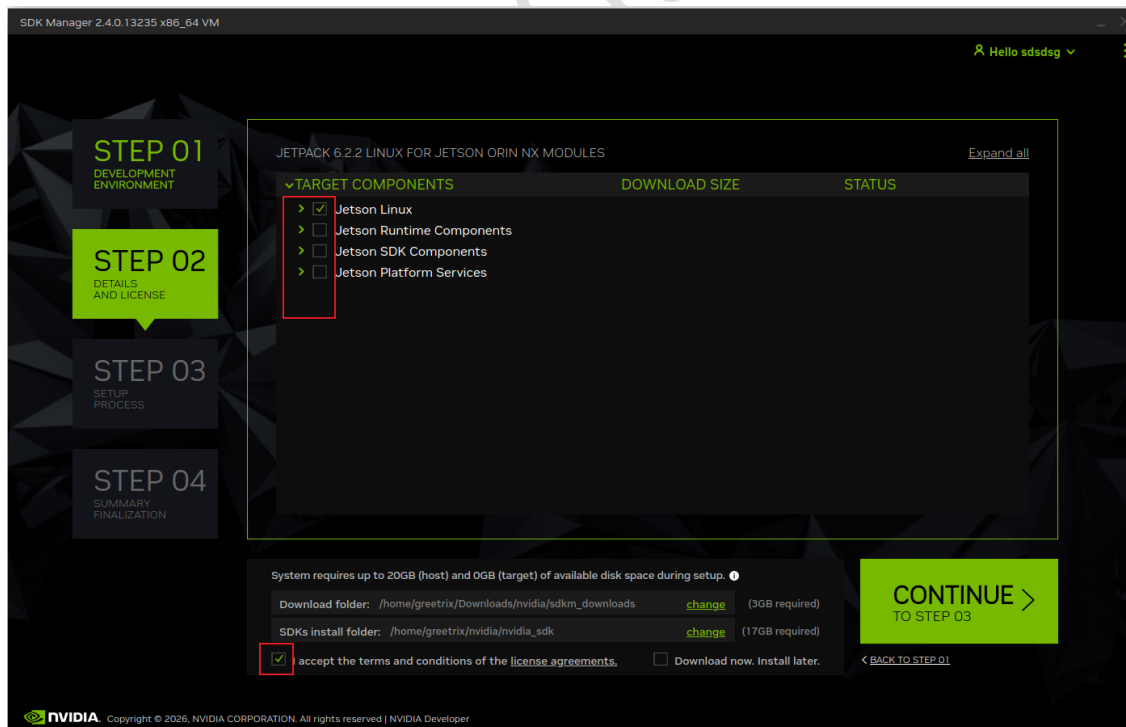

- e) P.S: 请在畅通的网络环境下进行下载以及安装，下载或安装失败时，可点击 **Retry** 继续，直至全部状态为 **Installed** 并且显示绿色，安装过程中会弹出联网烧写的信息，选择 **Skip**。（后续步骤通过脚本来自动替换设备树并且烧写系统）

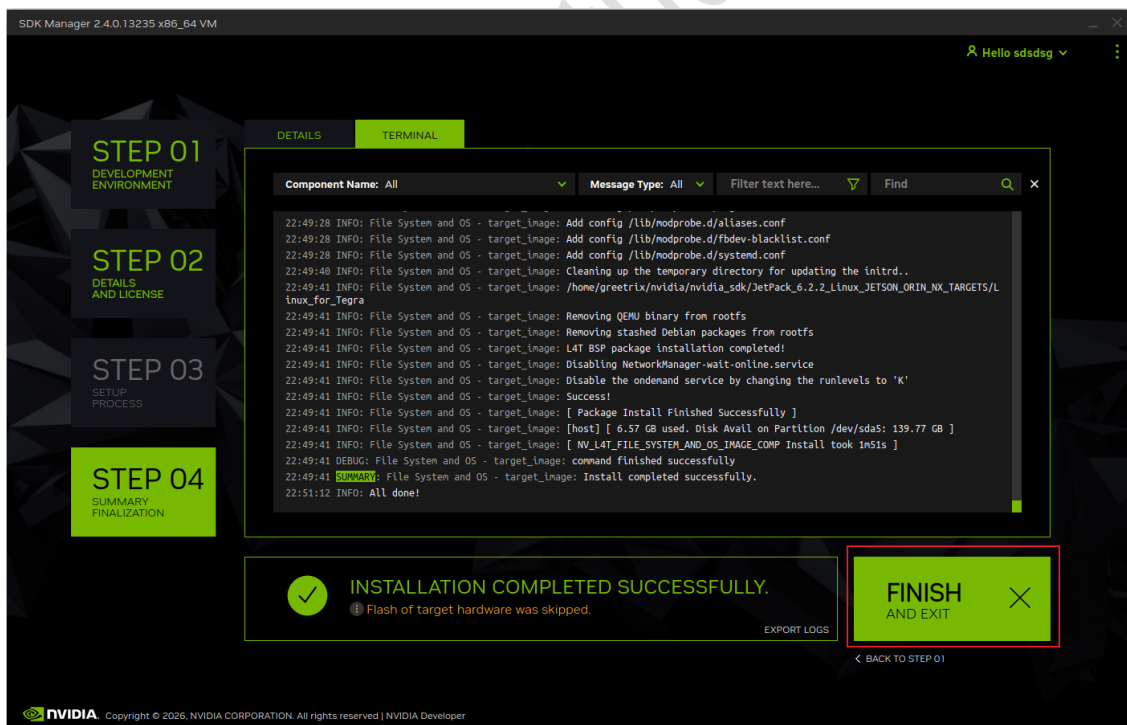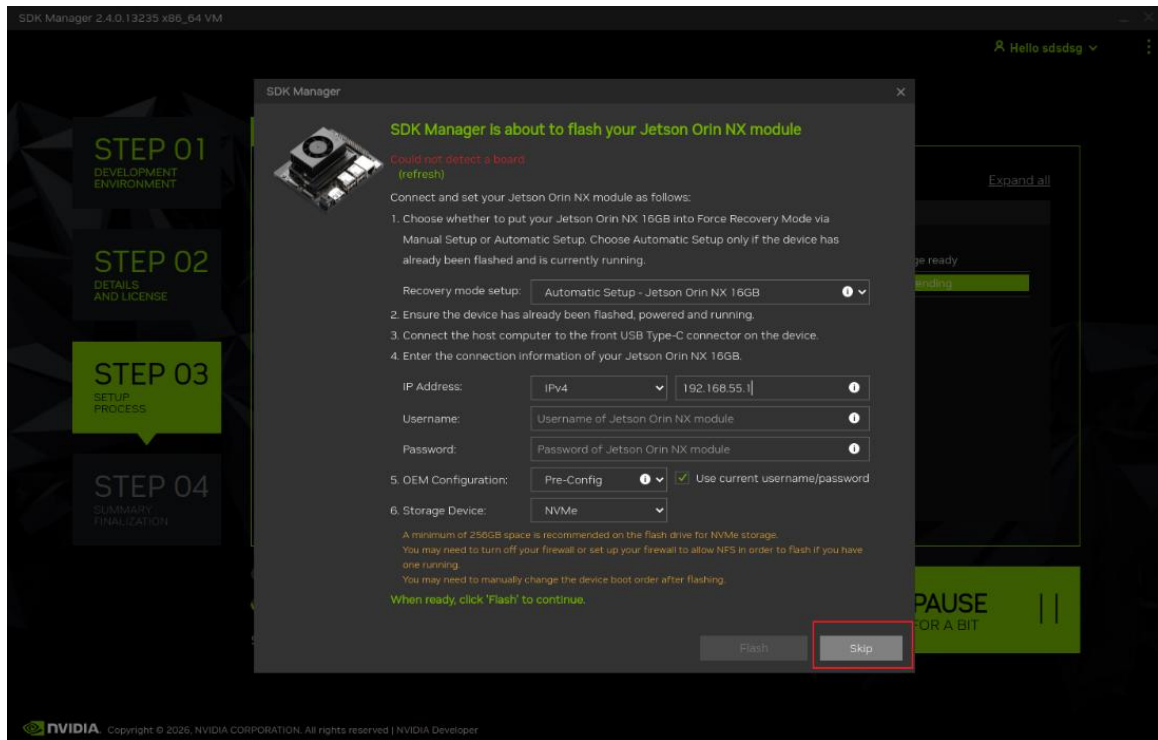


f) 安装成功后，会在~/nvidia/nvidia_sdk/下有相应版本烧写所需的文件

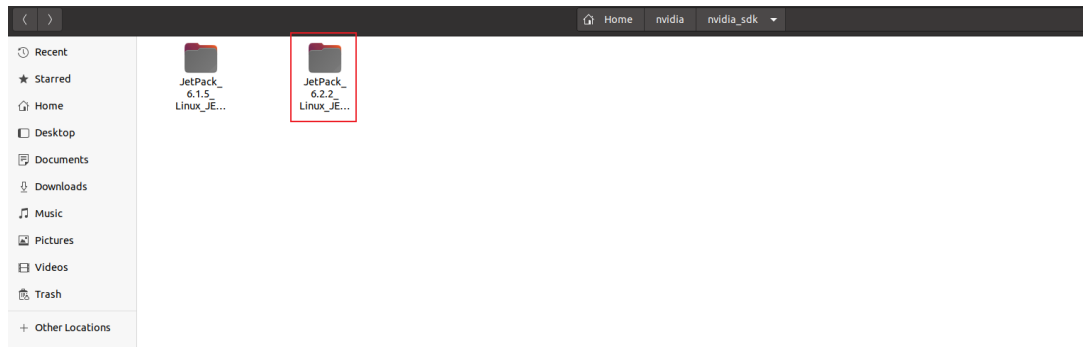

2. 核心板烧写系统


1. 使用 USB Type-C 线连接载板上的 USB OTG 接口

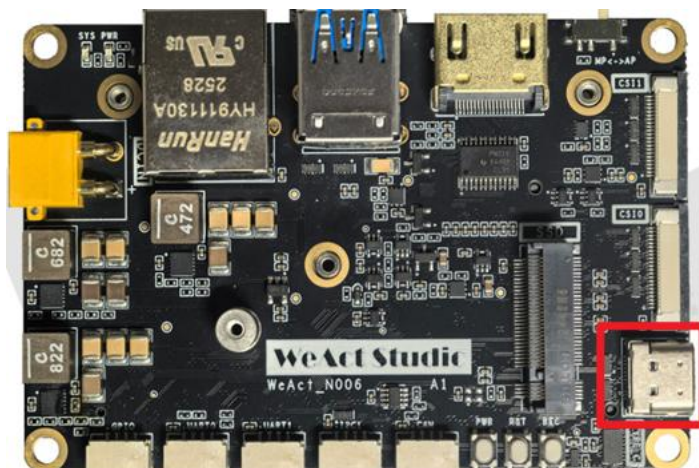

2. 将开机键拨至 MP（手动开机），两种方式进入 Recovery 模式

- a) 按住 **REC** 键，再按一下 **PWR** 键开机，松开 **REC** 键进入 Recovery 模式
- b) 按一下 **PWR** 键开机，按住 **REC** 键，按一下 **RST** 键进入 Recovery 模式

此时 VMWare 右下角会出现 **NVIDIA** 的 USB 驱动标志，或者打开终端，输入 **lsusb** 命令，会发现 **Nvidia Corp**，同时风扇转速会到达最大。

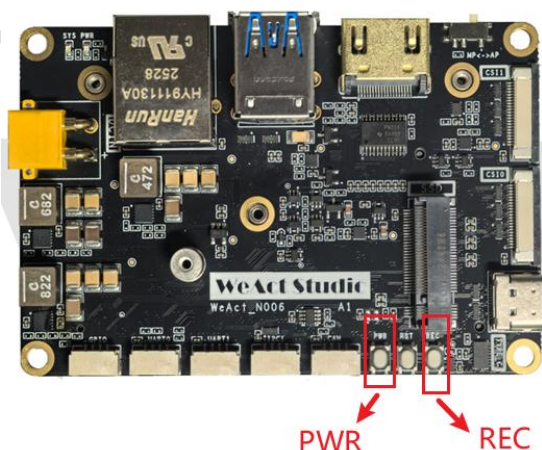


```
greetr1x@ubuntu:~/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Linux_for_Tegra$ lsusb
Bus 004 Device 001: ID 1d6b:0003 Linux Foundation 3.0 root hub
Bus 003 Device 004: ID 0e0f:0002 VMware, Inc. Virtual USB Hub
Bus 003 Device 003: ID 0e0f:0002 VMware, Inc. Virtual USB Hub
Bus 003 Device 005: ID 0955:7323 NVIDIA Corp. APX
Bus 003 Device 002: ID 0e0f:0003 VMware, Inc. Virtual Mouse
Bus 003 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 001 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 002 Device 003: ID 0e0f:0002 VMware, Inc. Virtual USB Hub
Bus 002 Device 002: ID 0e0f:0008 VMware, Inc. Virtual Bluetooth Adapter
Bus 002 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
greetr1x@ubuntu:~/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Linux_for_Tegra$
```




*VMwave 会有对应的图标显示

3. 进入 `~/nvidia/nvidia_sdk/JetPack_<Version> Linux_JETSON_ORIN_NX_TARGETS/Linux_for_Tegra`, <Version>为 Jetpack 版本号, 此处以 6.2.2 为例, 打开终端:

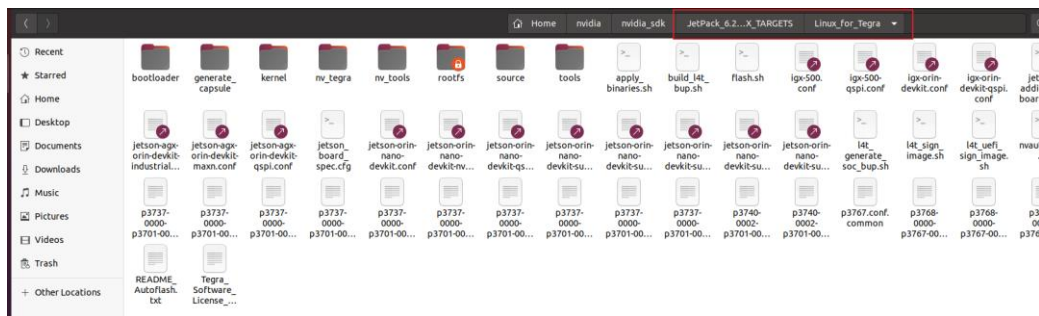


- a) `sudo apt-get install git`
 - b) `git clone https://github.com/WeActStudio/WeAct\_N006`
 - c)
 - i. `sudo bash WeAct_N006/03_Script/weact_n006_orin_flash.sh` (Super Mode)
 - ii. `sudo bash WeAct_N006/03_Script/weact_n006_orin_flash.sh -n` (Non-Super Mode)
- 或
- b) `git clone https://gitee.com/WeAct-TC/weact\_n006`
 - i. c) `sudo bash WeAct_N006/03_Script/weact_n006_orin_flash.sh` (Super Mode)
 - ii. `sudo bash WeAct_N006/03_Script/weact_n006_orin_flash.sh -n` (Non-Super Mode)



```
greetrix@ubuntu: ~/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Linux_for_Tegra
00:03:48.528 - Warning: Skip writing uefi_variables partition as no image is specified
00:03:48.551 - Warning: Skip writing uefi_ftw partition as no image is specified
00:03:48.574 - Warning: Skip writing reserved partition as no image is specified
00:03:48.597 - Warning: Skip writing worn partition as no image is specified
00:03:48.621 - Debug: Writing bct_backup.img (partition: BCT-boot-chain_backup) into /dev/mtdd0
00:03:48.629 - Debug: Sha1 checksum matched for /mnt/internal/bct_backup.img
00:03:48.633 - Debug: Writing /mnt/internal/bct_backup.img (32768 bytes) into /dev/mtdd0:66715648
Copied 32768 bytes from /mnt/internal/bct_backup.img to address 0x03fa0000 in flash
00:03:48.707 - Warning: Skip writing reserved partition as no image is specified
00:03:48.730 - Debug: Writing gpt_backup_secondary_3_0.bin (partition: secondary_gpt_backup) into /dev/mtdd0
00:03:48.738 - Debug: Sha1 checksum matched for /mnt/internal/gpt_backup_secondary_3_0.bin
00:03:48.741 - Debug: Writing /mnt/internal/gpt_backup_secondary_3_0.bin (16896 bytes) into /dev/mtdd0:66846720
Copied 16896 bytes from /mnt/internal/gpt_backup_secondary_3_0.bin to address 0x03fc0000 in flash
00:03:48.791 - Debug: Writing qspt_bootblob_ver.txt (partition: B_VER) into /dev/mtdd0
00:03:48.798 - Debug: Sha1 checksum matched for /mnt/internal/qspt_bootblob_ver.txt
00:03:48.801 - Debug: Writing /mnt/internal/qspt_bootblob_ver.txt (109 bytes) into /dev/mtdd0:66912256
Copied 109 bytes from /mnt/internal/qspt_bootblob_ver.txt to address 0x03fd0000 in flash
00:03:48.825 - Debug: Writing qspt_bootblob_ver.txt (partition: A_VER) into /dev/mtdd0
00:03:48.831 - Debug: Sha1 checksum matched for /mnt/internal/qspt_bootblob_ver.txt
00:03:48.834 - Debug: Writing /mnt/internal/qspt_bootblob_ver.txt (109 bytes) into /dev/mtdd0:66977792
Copied 109 bytes from /mnt/internal/qspt_bootblob_ver.txt to address 0x03fe0000 in flash
00:03:48.858 - Debug: Writing gpt_secondary_3_0.bin (partition: secondary_gpt) into /dev/mtdd0
00:03:48.866 - Debug: Sha1 checksum matched for /mnt/internal/gpt_secondary_3_0.bin
00:03:48.870 - Debug: Writing /mnt/internal/gpt_secondary_3_0.bin (16896 bytes) into /dev/mtdd0:67091968
Copied 16896 bytes from /mnt/internal/gpt_secondary_3_0.bin to address 0x03ffe000 in flash
00:03:48.901 - Info: Successfully flashed the QSPI.
00:03:48.905 - Info: Flashing success
00:03:48.912 - Debug: The device size indicated in the partition layout xml is smaller than the actual size. This utility will try to fix the GP
T.
Flash is successful
Reboot device
Cleaning up...
Log is saved to Linux_for_Tegra/initrdlog/flash-3-2_0_20260208-225849.log
[SUCCESS] Flash done. Please wait the Jetson Orin boot.
greetrix@ubuntu:~/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Linux_for_Tegra$
```

3. 安装 NVIDIA 组件


1. 选择需要 Target Hardware 以及 JetPack 版本，不勾选 HostMachine，，点击 Continue

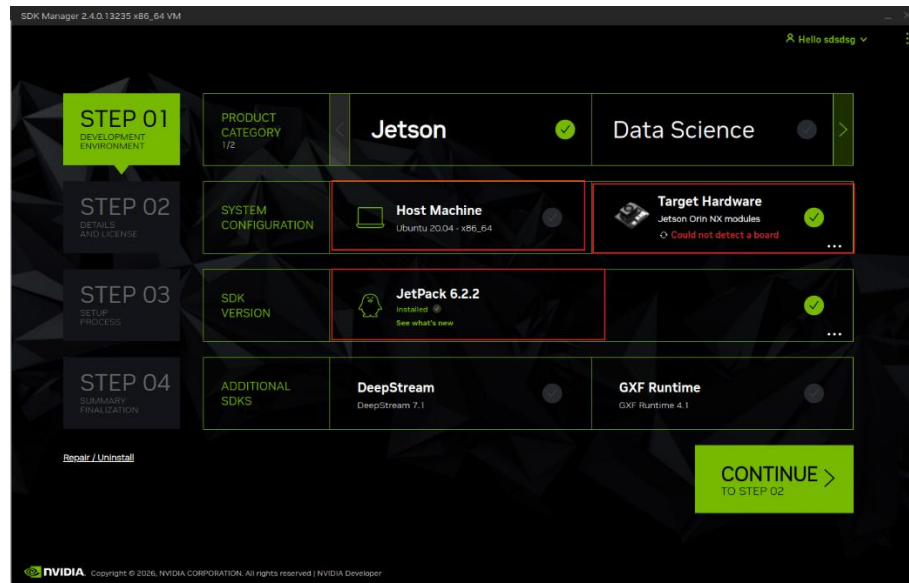

2. 勾选所需要 SDK 组件，勾选 I accept the terms and conditions of the license agreements，点击 CONTINUE 进行下一步。

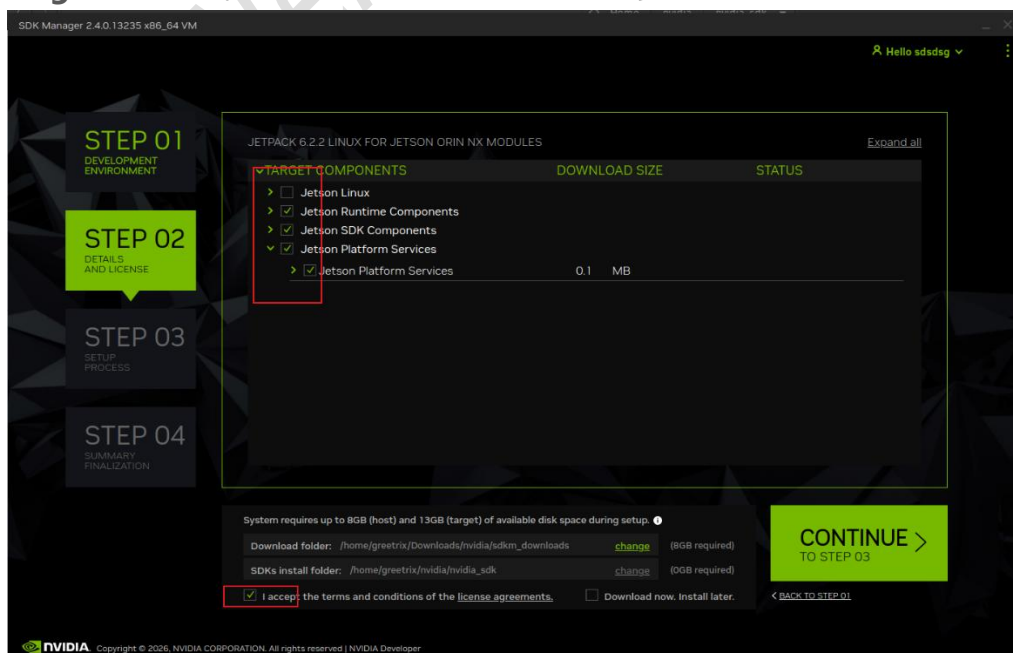



3. 使用 USB Type-C 线连接载板上的 USB OTG 接口。

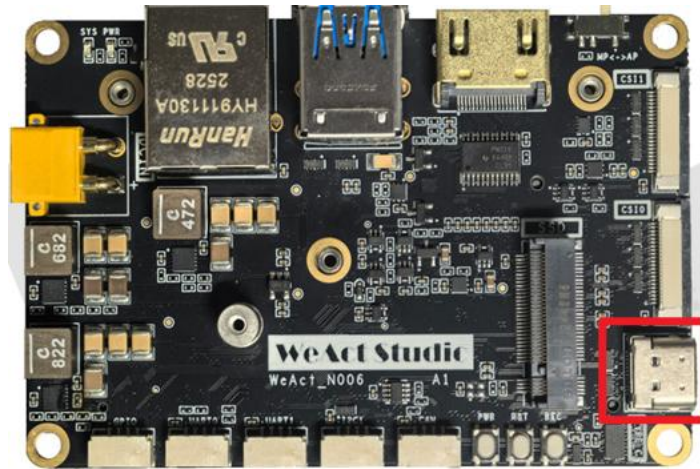


4. 将开机键拨至 MP（手动开机），按一下 PWR 键开机，此时 VMWare 右下角会出现 NVIDIA 的 USB 驱动标志，或者打开终端，输入 `lsusb` 命令，会发现 Nvidia Corp.

5. 输入 Orin NX 账号密码，Orin NX 端请保持联网状态，也可以用同局域网下的 IP（图 2，主机和 ORIN NX 连接同一个路由器）

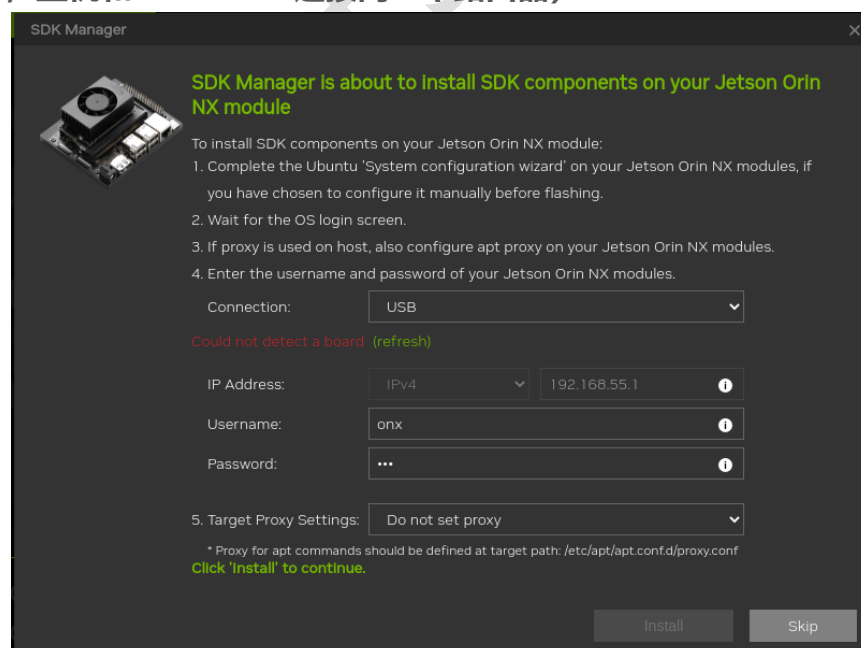

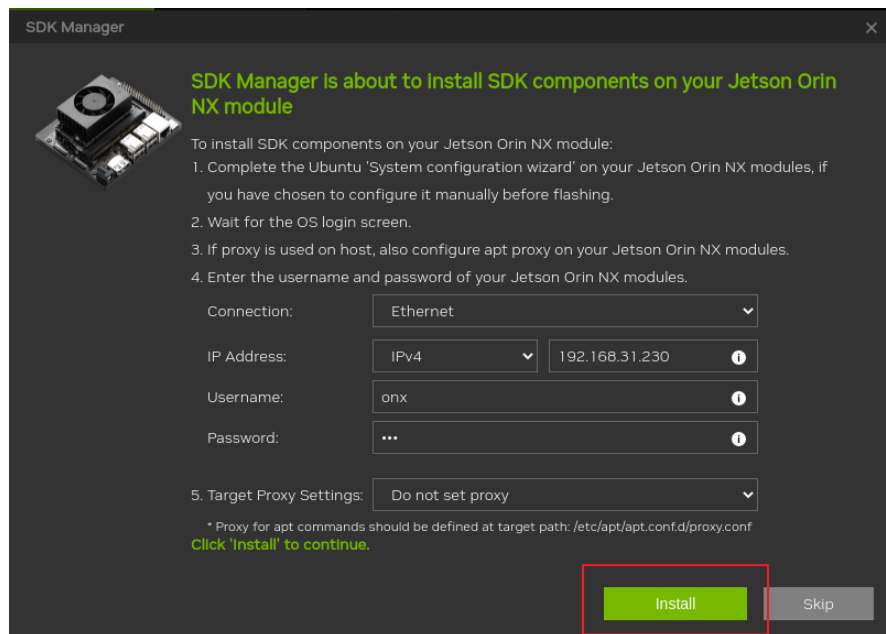

6. 等待安装完成即可。

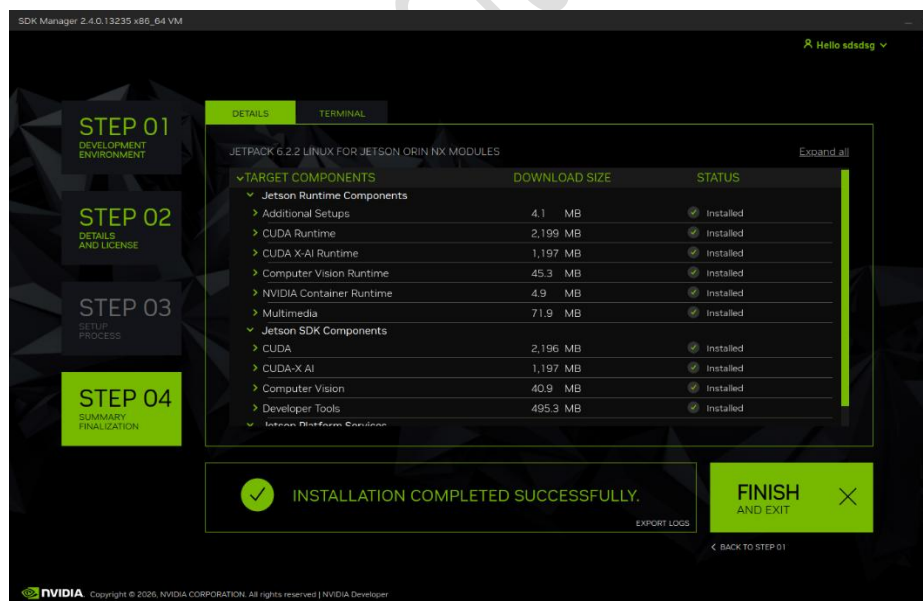

3. 备份和恢复系统

1. 使用和系统 Jetpack 版本一致的烧录环境，使用以下命令，等待备份完成即可
 - a) `sudo ./tools/backup_restore/l4t_backup_restore.sh -e nvme0n1 -b jetson-orin-nano-devkit-super (Super Mode)`
 - b) `sudo ./tools/backup_restore/l4t_backup_restore.sh -e nvme0n1 -b jetson-orin-nano-devkit (非 Super Mode)`

```
greetrix@ubuntu:~/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Linux_for_Tegra$ sudo ./tools/backup_restore/l4t_backup_restore.sh -e nvme0n1 -b jetson-orin-nano-devkit-super
[sudo] password for greetrix:
Please install the Secureboot package to use initrd flash for fused board
# Entry added by NVIDIA initrd flash tool
/home/greetrix/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Linux_for_Tegra/tools/kernel_flash/tmp 127.0.0.1(rw,nohide,insecure,no_subtree_check,async,no_root_squash)
rpcbind: another rpcbind is already running. Aborting
Export list for localhost:
/home/greetrix/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Linux_for_Tegra/tools/kernel_flash/tmp 127.0.0.1
01:32:04.706 - Debug: Checking UFW status and NFS port rules...
01:32:04.758 - Debug: UFW is not active. NFS port is accessible.
01:32:04.758 - Debug: Checking VPN connections...
01:32:04.760 - Debug: IPsec service is not running.
01:32:04.761 - Debug: VPN routes none in tun|tap|ppp|vpn|gpd.
01:32:04.762 - Debug: No VPN connection detected.
/home/greetrix/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Linux_for_Tegra/tools/kernel_flash/l4t_initrd_flash_internal.sh --no-flash --initrd --showlogs --network usb0 jetson-orin-nano-devkit-super internal
*****
*                               *
* Step 1: Generate rcm boot cmdline *
*                               *
*****
ROOTFS_AB= ROOTFS_ENC= /home/greetrix/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Linux_for_Tegra/flash.sh --no-flash --rcm-boot jetson-orin-nano-devkit-super mmcblk0p1
#####

nvbackup_partitions.sh: Start backing up nvme0n1p13 ...
1024+0 records in
1024+0 records out
67108864 bytes (67 MB, 64 MiB) copied, 1.87598 s, 35.8 MB/s
/mnt/images/temp : 0.05% (67108864 => 34356 bytes, /mnt/images/nvme0n1p13_bak.img)
nvbackup_partitions.sh: Success backing up nvme0n1p13 to nvme0n1p13_bak.img

nvbackup_partitions.sh: Start backing up nvme0n1p14 ...
6400+0 records in
6400+0 records out
419430400 bytes (419 MB, 400 MiB) copied, 11.8244 s, 35.5 MB/s
/mnt/images/temp : 0.04% (419430400 => 156111 bytes, /mnt/images/nvme0n1p14_bak.img)
nvbackup_partitions.sh: Success backing up nvme0n1p14 to nvme0n1p14_bak.img

nvbackup_partitions.sh: Start backing up nvme0n1p15 ...
7672+0 records in
7672+0 records out
502792192 bytes (503 MB, 480 MiB) copied, 14.01 s, 35.9 MB/s
/mnt/images/temp : 39.75% (502792192 => 199838179 bytes, /mnt/images/nvme0n1p15_bak.img)
nvbackup_partitions.sh: Success backing up nvme0n1p15 to nvme0n1p15_bak.img

nvbackup_partitions.sh: Backing up QSPI0...
64+0 records in
64+0 records out
67108864 bytes (67 MB, 64 MiB) copied, 3.35709 s, 20.0 MB/s
nvbackup_partitions.sh: Backup complete (after command prompt popping up)
Backup image is stored in /home/greetrix/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Linux_for_Tegra/tools/backup_restore/images
Operation finishes. You can manually reset the device
greetrix@ubuntu:~/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Linux_for_Tegra$
```



2. 在备份完成的烧录环境，使用以下命令

- sudo ./tools/backup_restore/l4t_backup_restore.sh -e nvme0n1 -r jetson-orin-nano-devkit-super (Super Mode)
- sudo ./tools/backup_restore/l4t_backup_restore.sh -e nvme0n1 -r jetson-orin-nano-devkit (非 Super Mode)


```
greetrix@ubuntu:~/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/L
linux_for_Tegra$ sudo ./tools/backup_restore/l4t_backup_restore.sh -e nvme0n1 -r
jetson-orin-nano-devkit-super
[sudo] password for greetrix:
Please install the Secureboot package to use initrd flash for fused board
# Entry added by NVIDIA initrd flash tool
/home/greetrix/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Lin
x_for_Tegra/tools/kernel_flash/tmp 127.0.0.1(rw,nohide,insecure,no_subtree_check
,async,no_root_squash)
rpcbind: another rpcbind is already running. Aborting
Export list for localhost:
/home/greetrix/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Lin
x_for_Tegra/tools/kernel_flash/tmp 127.0.0.1
02:29:02.281 - Debug: Checking UFW status and NFS port rules...
02:29:02.334 - Debug: UFW is not active. NFS port is accessible.
02:29:02.335 - Debug: Checking VPN connections...
02:29:02.337 - Debug: IPsec service is not running.
02:29:02.338 - Debug: VPN routes none in tun|tap|ppp|vpn|gpd.
02:29:02.338 - Debug: No VPN connection detected.
/home/greetrix/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/Lin
x_for_Tegra/tools/kernel_flash/l4t_initrd_flash_internal.sh --no-flash --initrd
--showlogs --network usb0 jetson-orin-nano-devkit-super internal
*****
*
* Step 1: Generate rcm boot cmdline *
*
*****
ROOTFS_AB= ROOTFS_ENC= /home/greetrix/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JET
SON_ORIN_NX_TARGETS/Linux_for_Tegra/flash.sh --no-flash --rcm-boot jetson-orin-n
ano-devkit-super mmcblk0p1
*****
# L4T BSP Information:
nvrestore_partitions.sh Restoring nvme0n1 with image nvme0n1p10_bak.img...
131072+0 records in
131072+0 records out
67108864 bytes (67 MB, 64 MiB) copied, 0.167374 s, 401 MB/s
nvrestore_partitions.sh Restoring nvme0n1 with image nvme0n1p11_bak.img...
163840+0 records in
163840+0 records out
83886080 bytes (84 MB, 80 MiB) copied, 0.210278 s, 399 MB/s
nvrestore_partitions.sh Restoring nvme0n1 with image nvme0n1p12_bak.img...
1024+0 records in
1024+0 records out
524288 bytes (524 kB, 512 KiB) copied, 0.00191661 s, 274 MB/s
nvrestore_partitions.sh Restoring nvme0n1 with image nvme0n1p13_bak.img...
131072+0 records in
131072+0 records out
67108864 bytes (67 MB, 64 MiB) copied, 0.184356 s, 364 MB/s
nvrestore_partitions.sh Restoring nvme0n1 with image nvme0n1p14_bak.img...
378186240 bytes (378 MB, 361 MiB) copied, 1 s, 378 MB/s
819200+0 records in
819200+0 records out
419430400 bytes (419 MB, 400 MiB) copied, 1.11363 s, 377 MB/s
nvrestore_partitions.sh Restoring nvme0n1 with image nvme0n1p15_bak.img...
496281088 bytes (496 MB, 473 MiB) copied, 5 s, 99.3 MB/s
982016+0 records in
982016+0 records out
502792192 bytes (503 MB, 480 MiB) copied, 5.60264 s, 89.7 MB/s
Erasing 65536 Kibyte @ 0 -- 100 % complete
67+1 records in
67+1 records out
67108864 bytes (67 MB, 64 MiB) copied, 68.2603 s, 983 kB/s
~
nvrestore_partitions.sh Successful restore of partitions on target board.
Operation finishes. You can manually reset the device
greetrix@ubuntu:~/nvidia/nvidia_sdk/JetPack_6.2.2_Linux_JETSON_ORIN_NX_TARGETS/L
linux_for_Tegra$
```

4. 安装 JTOP (控制风扇, 查看系统信息)

- 打开终端, 通过下面命令安装 JTOP
 - `sudo apt-get install python3-pip python3-dev -y`
 - `sudo -H pip3 install jetson-stats --break-system-packages`
 - `sudo systemctl restart jtop.service`
 - `sudo jtop`

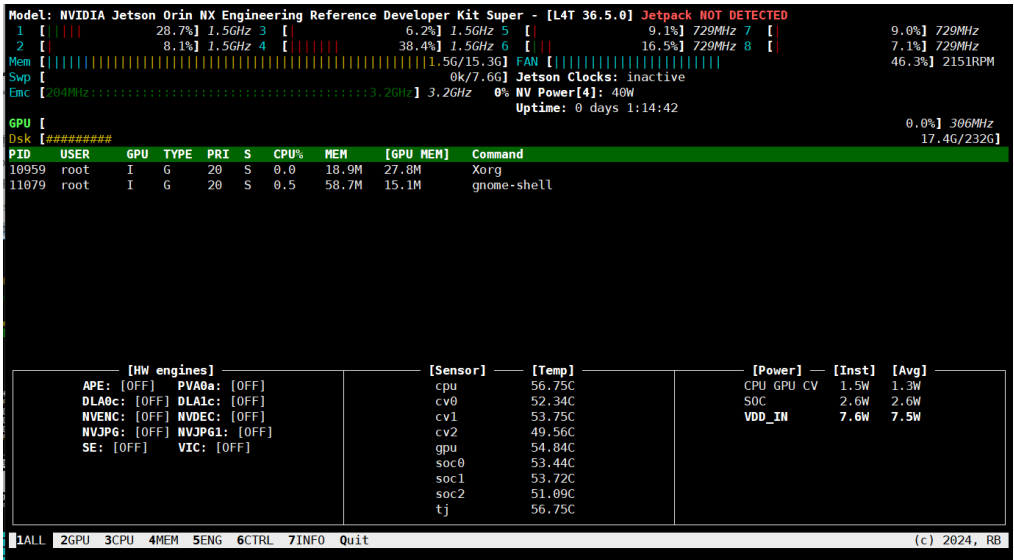

- 点击 6CTRL, 即可手动控制风扇转速及电源方案

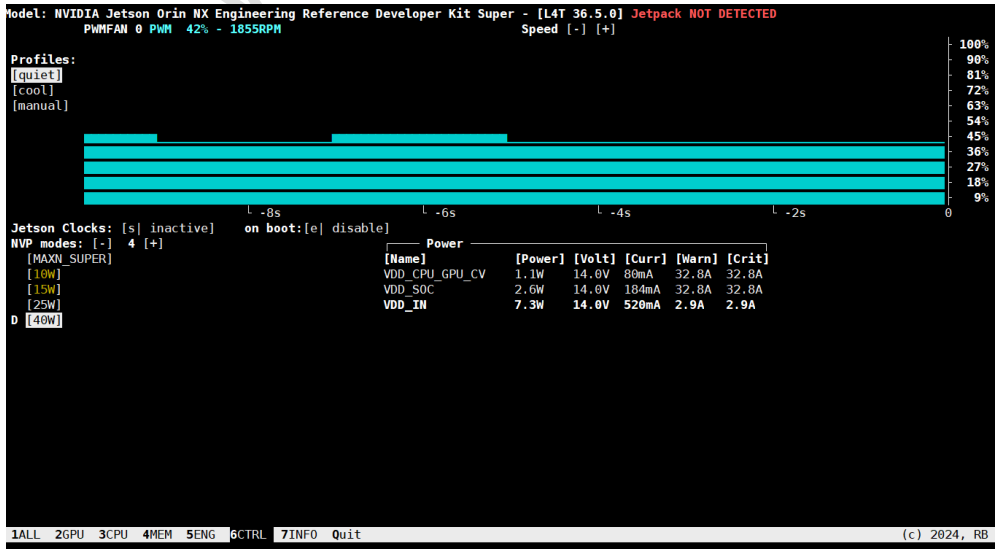

5. 使用 CAN 进行通信

1. OrinNX 上集成了 1 个 CAN 控制器 CAN0，另外 WeAct Studio 的载板上设计了 1 个 CAN 收发器（CAN0），可直接挂载 CAN 物理总线使用。
2. OrinNX 自带 canbus 的驱动并集成到了镜像中，已经支持 canbus 无需多做处理。我们需要安装 canbus 模块。（在终端输入下面命令或者放入 rc.local 里面开启自启）

```
sudo modprobe can
sudo modprobe can-raw
sudo modprobe can-bcm
sudo modprobe can-gw
sudo modprobe can_dev
sudo modprobe mttcan
```

3. 通过 **lsmod** 检查是否安装成功。

```
root@onx:/home/onx# lsmod | grep can
can_gw          24576  0
can_bcm        32768  0
can_raw        28672  0
can            28672  3 can_gw,can_raw,can_bcm
mttcan         65536  0
nvpps          28672  1 mttcan
can_dev        36864  1 mttcan
root@onx:/home/onx#
```

4. 配置 canbus 属性，和串口的波特率设置类似。

```
sudo ip link set can0 type can bitrate 500000
sudo ip link set up can0
```

5. 通过 ifconfig 查看是否配置成功。

```
root@onx:/home/onx# sudo ip link set can0 type can bitrate 500000
root@onx:/home/onx# sudo ip link set up can0
root@onx:/home/onx# ifconfig
can0: flags=193<UP,RUNNING,NOARP> mtu 16
    unspec 00-00-00-00-00-00-00-00-00-00-00-00-00-00-00-00 txqueuelen 10  (UNSPEC)
    RX packets 0  bytes 0 (0.0 B)
    RX errors 0  dropped 0  overruns 0  frame 0
    TX packets 0  bytes 0 (0.0 B)
    TX errors 0  dropped 0  overruns 0  carrier 0  collisions 0
    device interrupt 201
```

6. 在一个终端通过 `cansend can0(can1) ×××` 命令来发送数据, 另一个终端通过 `candump can1(can0)` 完成实际信号收发测试

[illegible]

6. GPIO 在 SHELL 中的使用

- 1. Jetson OrinNX 可直接通过 shell 命令控制 GPIO 输入输出，通过下面命令安装 gpiod
 - a) `sudo apt-get install gpiod`
 - b) `sudo apt-get install libgpiod-dev`

2. GPIO 使用方法

	Orin NX 8G/16G
GPIO1	PG.06
GPIO2	PAC.06
GPIO3	PN.01
GPIO4	PH.00

- a. GPIO 输出：以 GPIO1 为例
 - i. `gpioset `gpiofind "PG.06"`=0` （设置输出低电平）
 - ii. `gpioset `gpiofind "PG.06"`=1` （设置输出高电平）
- b. GPIO 输入：以 GPIO1 为例
 - i. `gpioget `gpiofind "PG.06"``

7. UART/I2C/CSI 的使用

1. UART 的使用

	Jetpack 5.X	Jetpack 6.X/7.X
UART0	ttyTHS1	ttyTHS0
UART1	ttyTHS0	ttyTHS1

a. 可以通过下面命令安装 cutecom/minicom 来使用 UART:

- a) `sudo apt-get install cutecom`
- b) `sudo apt-get install minicom`

2. **I2C 的使用** (载板上 I2C 对应为 I2C@7), 可以通过下面命令来查看挂在在 I2C 接口上的设备地址:

- a) `sudo i2cdetect -r -y 7`

3. **CSI 的使用** (以双 IMX219 为例)

- a) 命令行中输入: `sudo /opt/nvidia/jetson-io/jetson-io.py`

```
root@onx:/home/onx# sudo /opt/nvidia/jetson-io/jetson-io.py
```

- b) 选择 **Configure Jetson 22pin CSI Connector**

```
===== Jetson Expansion Header Tool =====

Select one of the following:

Configure Jetson 40pin Header
Configure Jetson 22pin CSI Connector
Configure Jetson M.2 Key E Slot
Exit
```

- c) 选择 **Configure for compatible hardware**


```
===== Jetson Expansion Header Tool =====  
  
3.3V ( 1) .. ( 2) i2c3  
i2c3 ( 3) .. ( 4) GND  
GND ( 7) .. ( 8) NA  
NA ( 9) .. (10) GND  
GND (13) .. (14) NA  
NA (15) .. (16) GND  
GND (19) .. (20) NA  
NA (21) .. (22) GND  
  
Jetson 22pin CSI Connector:  
Configure for compatible hardware  
Back
```

d) 选择 Camera IMX219 Dual

```
===== Jetson Expansion Header Tool =====  
  
Select one of the following options:  
Camera IMX219 Dual  
Camera IMX219-A  
Camera IMX219-A and IMX477-C  
Camera IMX219-C  
Camera IMX477 Dual  
Camera IMX477-A  
Camera IMX477-A and IMX219-C  
Camera IMX477-C  
  
Back
```

e) 选择 Save pin changes

```
===== Jetson Expansion Header Tool =====  
  
3.3V ( 1) .. ( 2) i2c3  
i2c3 ( 3) .. ( 4) GND  
GND ( 7) .. ( 8) NA  
NA ( 9) .. (10) GND  
GND (13) .. (14) NA  
NA (15) .. (16) GND  
GND (19) .. (20) NA  
NA (21) .. (22) GND  
  
Jetson 22pin CSI Connector:  
Save pin changes  
Discard pin changes
```

f) 选择 Save and reboot to reconfigure pins

```
===== Jetson Expansion Header Tool =====  
  
Select one of the following:  
  
Configure Jetson 40pin Header  
Re-configure Jetson 22pin CSI Connector  
Configure Jetson M.2 Key E Slot  
Save and reboot to reconfigure pins  
Save and exit without rebooting  
Discard all pin changes  
Exit
```

g) 等待重启即可，即可使用双 IMX219

WeAct Studio

联系我们

1. Github: <https://github.com/WeActStudio>
2. 码云: <https://gitee.com/WeAct-TC>
3. 淘宝: <https://weactstudio.taobao.com/>



WeAct Studio
官方淘宝店