


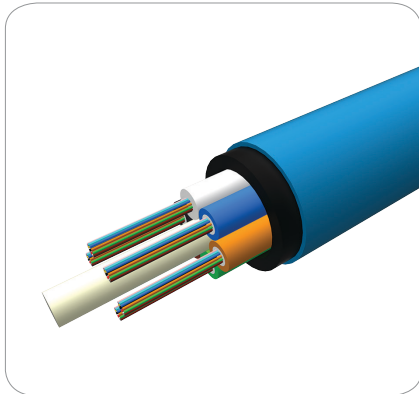

72 Fibre High Strength Stranded Loose Tube Cable

Stranded cable comprising up to 72 optical fibres contained in jelly-filled loose tubes (up to 12 fibres per tube). The tubes and fillers are laid around a central strength member and contained within a dry, water blocked cable core, sheathed with polyethylene (PE) and UV stable, termite resistant Nylon, forming a conventional HS1 cable. Surface printing includes length marking at one metre intervals.

Part Number

LMJ6**JA0††BE

LKJ6**JA0¥¥BE


Applicable Specifications

AS/CA S008, AS 1049, AS/NZS 11801-1, TIA-598-D, IEC 60793, IEC 60794, ITU-T Recommendations

Applications

High strength stranded loose tube cable is ideal for long-haul, backbone applications where the cable is being installed in rocky or expansive soils, suitable for duct & direct-burial applications. Cable has been rigorously tested for lateral & axial compressive loads to simulate the demands of expansive black soil. UV stabilised outer jacket as per AS 1049.

Cable Components

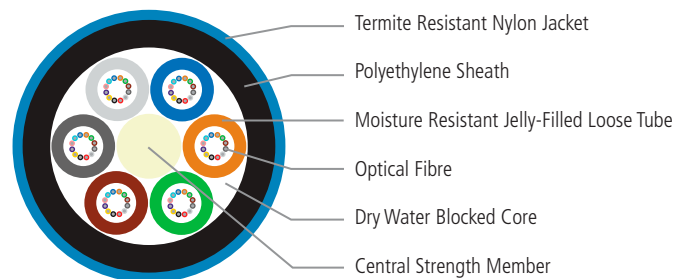

Physical Characteristics

SPECIFICATION		UNIT	VALUE
Nominal Tube Diameter		mm	3.2
Nominal Cable Diameter		mm	13.6
Nominal Weight		kg/km	150
Temperature Range		°C	-40 to 70
Max. Pulling Tension - Install		kN	6
Min. Bending Radius - Under Load		mm	20 x OD
Min. Bending Radius - No Load		mm	10 x OD
Max. Crush Resistance	Short-term (10 min)	kN/100 mm	6
	Long-term (120 min)	kN/100 mm	3
Impact		kg.m	1.5

** Represents any fibre type, 1D = SM G.652.D "LWP", 1E = SM Premium G.652.D "LWP", 62 = 62.5 µm multimode "OM1", 53 = 50 µm multimode "OM3", 55 = 50 µm multimode "OM4". Contact AFL for other fibre types.

†† Represents any fibre-count up to 72 (LMJ6 - 12F/Tube).

¥¥ Represents any fibre-count up to 36 (LKJ6 - 6F/Tube).

Refer to OSP Cable - Optical Characteristics for further information.