


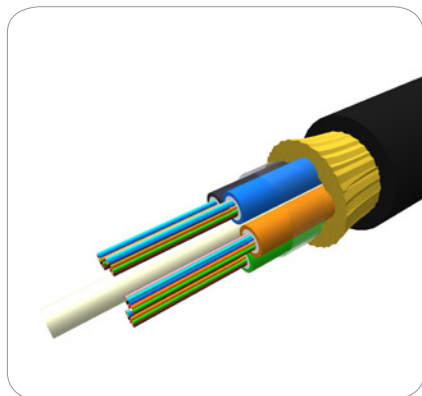

ADSS Product Line Reference Sheet

A "dry" water-blocked, loose tube cable principally used for aerial installations, typically on roadside power distribution poles. Being totally non-metallic it is ideal for applications in close proximity to high-voltage power distribution lines, for which it has become a standard.

This product is also suited to single point suspension applications such as down mine shafts or any application where the product has to support either a higher load than conventional terrestrial cable or a permanent or varying tensile load, applied through the outer sheath. Standard pole-mounting hardware is readily available for this product. Contact AFL Australia for assistance with sag-tension calculations or other application support.

Applicable Specifications

- AS/CA S-008
- AS 1049
- AS3080
- IEC 60793
- IEC 60794

Parameters

- Sag: Typical 1-2% per 100 m
- Ice: Up to 5 mm (Refer to Data Sheet)
- Max Wind: 100 km/hr

Cable Specifications

UP TO 48F	UP TO 60F	UP TO 72F	UP TO 96F	UP TO 144F
				
STANDARD CHARACTERISTICS				
Temperature Range	-40°C to 70°C			
Min Bending Radius - Under Load	20 x OD mm			
Min Bending Radius - No Load	10 x OD mm			
SHORT SPAN - 50 METRE SPAN				
	UP TO 48F	UP TO 72F	UP TO 96F	UP TO 144F
Part Number	SMM4xxLB048BK	SMM6xxPA072BK	SMM8xxPA096BK	SMMCxxPA144BK
Diameter (mm)	9.9	10.4	11.2	14
Weight (kg/km)	69	85	106	150
MID SPAN - 150 METRE SPAN				
	UP TO 60F	UP TO 72F	UP TO 96F	UP TO 144F
Part Number	SMM5xxLL060BK	SMM6xxLL072BK	SMM8xxPE096BK	SMMCxxLI144BK
Diameter (mm)	11.1	11.9	11.3	17.3
Weight (kg/km)	95	115	107	230
LONG SPAN - 350 METRE SPAN				
	DOUBLE SHEATHED CABLE			
	UP TO 60F	UP TO 72F	UP TO 96F	UP TO 144F
Part Number	SMJ5xxLE060BK	SMJ6xxLE072BK	SMJ8xxLA096BK	SMJCxxLE144BK
Diameter (mm)	13.5	14.3	15.7	19.6
Weight (ka/km)	140	156	190	300

* Representation only of typical cable cross section

** Represents any fibre type, 1D = sm G652.d "LWP", 62 = 62.5 um multimode "OM1", 50 = 50 um multimode "OM2", 53 = 50 um multimode "OM3", 55 = 50 um multimode "OM4"