



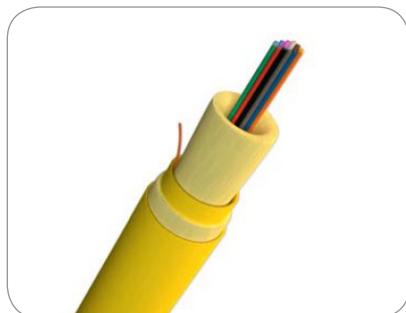

RQ012930199B

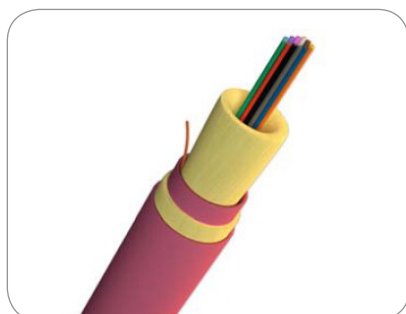

RQ012C301KKB-BIF

MicroCore® Ruggedised

Standards

- ICEA-S-83-596
- GR-409-I2
- CSA 22.2#232
- NFPA 262

Safety Listing

- OFNP
- FT6

Mechanical Properties

SPECIFICATION	UNIT	VALUE
Fibre Count	-	12
Nominal OD	mm	4.8
Bending Radius - Installation	cm	7.2
Bending Radius - Long Term	cm	4.8
Weight	kg/km	21
Tension - Short Term	N	660
Tension - Long Term	N	200
Number of Positions	-	1
Number of Fillers	-	0
Sub OD	mm	3.0
Temperature - Operation	°C	0 to +70
Temperature - Storage/Shipping	°C	-40 to +70
Temperature - Installation	°C	0 to +70

Optical Properties – RQ012930199B

CODE/FIBRE TYPE	MAX. ATTENUATION (dB/KM)				OVERFILLED LANUNCH BANDWIDTH (MHZ-KM)		EMBC (MHZ-KM)	1 GIGABIT ETHERNET MIN LINK DISTANCE (M)		10 GIGABIT ETHERNET MIN DISTANCE (M)	
	850nm	1300nm	1310nm	1550nm	850nm	1300nm		850nm	1300nm	850nm	1300nm
(9) AFL SMF (G.652.D/G.657.A1) OS2	-	-	0.5	0.5	-	-	-	-	5000	-	10000

Optical Properties – RQ012C301KKB-BIF

CODE/FIBRE TYPE	MAX. ATTENUATION (dB/KM)				OVERFILLED LANUNCH BANDWIDTH (MHZ-KM)		EMBC (MHZ-KM)	1 GIGABIT ETHERNET MIN LINK DISTANCE (M)		10 GIGABIT ETHERNET MIN DISTANCE (M)	
	850nm	1300nm	1310nm	1550nm	850nm	1300nm		850nm	1300nm	850nm	1300nm
(C) 50 Laser-Link 550 OM4	3.0	1.0	-	-	3500	550	4700	1040	550	550	-