


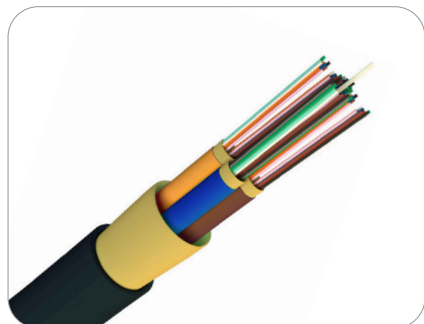

Tactical Micro Cable

AFL Tactical Micro Cable is ideal for use in installations where extreme environmental conditions are present. Designed for indoor / outdoor applications, AFL Tactical Micro Cable is flame retardant and suitable for direct MTP termination.


Features

- Flame retardant PUR compliant to IEC 60332-1-2
- Flexible construction allows for multiple deployments
- All Dielectric construction with water blocking aramid strength members
- Sub-unitised, 2.1 mm 12F subs, 12F to 48F
- Performance in a wide temperature range
- UV, Sunlight and water resistant
- Durable in high traffic areas

Applications

- Field deployable
- Temporary installation of critical communications lines where quick retrieval and re-use is necessary
- High traffic areas
- Security and Sensing applications
- Broadcast deployments
- Installations in harsh environments
- Intra-building 'backbones'
- MTP to MTP or MTP to single fibre connector terminations

Cable Components

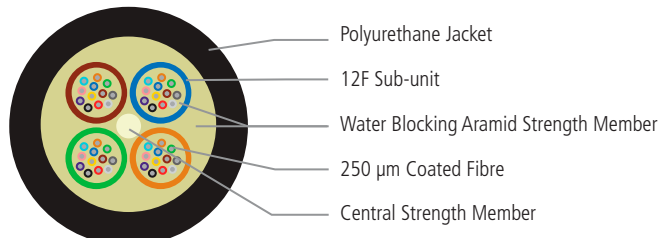

Mechanical Data

PART NUMBER	FIBRE COUNT	CABLE ELEMENTS		NOMINAL SUB-UNIT/ FILLER DIAMETER	NOMINAL CABLE DIAMETER	NOMINAL WEIGHT	MAX. TENSILE LOAD	CRUSH	MINIMUM BEND RADIUS	
		SUB-UNIT	FILLERS				(N)	(N/100 MM)	(MM)	
				(MM)	(MM)	(KG/KM)	INSTALLATION	SHORT TERM	INSTALLATION	LONG TERM
C*EAAY8AZZ	12	1	3	2.1	8	58	2000	5000	120	80
C*EACY8AZZ	24	2	2							
C*EAFY8AZZ	48	4	0							

Note: Diameter and weight subject to change without notice.

Note: Outer jacket colours other than Black are available upon request.

Fibre Specifications

*PART NUMBER DESIGNATOR	FIBRE TYPE	ISO/IEC	BUFFER DIAMETER	MAXIMUM ATTENUATION				
				(dB/km)				
			(MICRON)	850 nm	1300 nm	1310 nm	1550 nm	1625 nm
7	G.657.A1	OS2	250±15	N/A	N/A	0.4	0.3	0.3
3	50 µm Multimode	OM3	250±15	2.9	1.0	N/A	N/A	N/A
4	50 µm Multimode	OM4	250±15	2.9	1.0	N/A	N/A	N/A

Tactical Micro Cable

Qualifications

GOVERNING BODY	STANDARD CODE	COMPONENT
IEC	60794	Cable
IEC	60332-1-2	Cable
RoHS	2011/65/EU	Cable
TIA	598-D	Fibre
IEC	60793	Fibre
ITU-T	G.657.A1 / G.651.1	Fibre

Temperature Specifications

TEMPERATURE RANGE	
Installation	-20°C to +65°C
Operation	-50°C to +80°C
Storage	-50°C to +80°C

Contact AFL for further details