


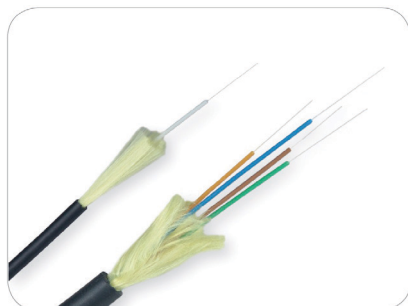

Tactical Tight Buffered Cable

AFL Tactical Tight Buffered Cables are ideal for use in installations where extreme environmental conditions are present. Designed to be deployed and retrieved in the field, AFL's Tactical Tight Buffered Cables are highly resistant to damage caused by repeated impacts crushing forces, abrasion and extreme temperatures.


Features

- Cut resistant polyurethane jacket with flame retardant options available
- Highly flexible construction allows for multiple deployments
- All aramid strength members
- Performance in wide temperature range
- UV, Fungus and water resistant
- High impact and crush resistance
- Durable in high traffic areas
- MIL-PRF-46291 qualified fibre available (-RH designation)

Specifications

- Field deployment in abusive environments
- Temporary installation of critical communications lines where quick retrieval and re-use is necessary
- High Traffic areas
- Security and Sensing applications
- Broadcast deployments
- Installations in harsh environments

Cable Components

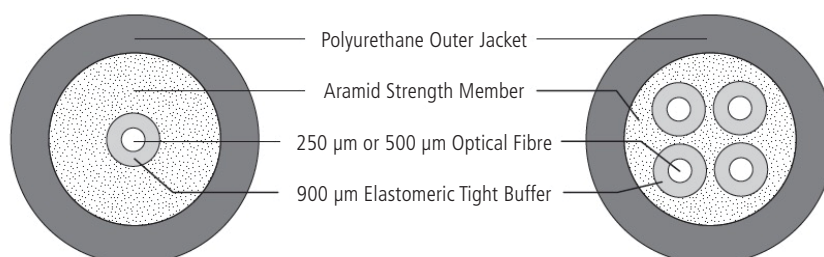

Specifications

CHARACTERISTIC	TEST PROCEDURE	PERFORMANCE
Tensile and Elongation	EIA/TIA-455-33	
Operating Tensile Strength	EIA/TIA-455-33	
Low-Temp Flexibility	EIA/TIA-455-37	
Cyclic Flexing	EIA/TIA-455-104	2000
Crush Resistance	EIA/TIA-455-41	2000 N/cm or greater
Impact	EIA/TIA-455-25	200
Temperature Cycling	EIA/TIA-455-3	-46°C to 85°C
Temperature/Humidity Cycling	EIA/TIA-455-5 Method B	
Life Aging	EIA/TIA-455-4	
Freezing Water Immersion	EIA/TIA-455-98	

Tactical Tight Buffered Cable

Mechanical Data

AFL NO.	FIBRE COUNT	NOMINAL DIAMETER		NOMINAL WEIGHT		MAXIMUM TENSILE LOAD		MINIMUM BEND RADIUS	
		INCHES	(MM)	LBS/1000FT	(KG/KM)	LBS (N)		INCHES (CM)	
						INSTALLATION	LONG TERM	INSTALLATION	LONG TERM
X%002*551#0H	2	0.22	(5.5)	16.2	(25)	400 (1780)	130 (578)	2.2 (5.5)	1.1 (2.8)
X%004*551#0H	4	0.22	(5.5)	16.2	(25)	400 (1780)	130 (578)	2.2 (5.5)	1.1 (2.8)
X%002*581#0H	2	0.23	(5.8)	21.5	(32)	400 (1780)	130 (578)	3.4 (8.7)	2.3 (5.8)
X%004*581#0H	4	0.23	(5.8)	21.5	(32)	400 (1780)	130 (578)	3.4 (8.7)	2.3 (5.8)
X%006*611#0H	6	0.24	(6.1)	22.2	(33)	400 (1780)	130 (578)	3.6 (9.2)	2.4 (6.1)
X%008*641#0H	8	0.25	(6.4)	28.8	(44)	470 (2090)	160 (712)	2.5 (6.4)	1.3 (3.2)
X%012*641#0H	12	0.25	(6.4)	30.8	(47)	470 (2090)	160 (712)	2.5 (6.4)	1.3 (3.2)

Note: Diameter and weight subject to change without notice

Note: For fibre counts other than those listed, please contact AFL

Replace percent (%) in AFL No. with corresponding jacket type below.

1 = Tactical Polyurethane

2 = Flame Retardant Polyurethane

3 = LSZH Polyurethane

500 µm primary coated fibre available, replace H in AFL number with number corresponding below.

G = 500 µm Coated Optical Fibre

H = 250 µm Coated Optical Fibre

Replace asterisk (*) in AFL No. with corresponding fibre type below.

5 = 50/125 µm multimode GIGA-Link™ 600

6 = 62.5/125 µm multimode GIGA-Link™ 300

K = Bend Insensitive G.657A1 single-mode

L = 50/125 µm OM3

C = 50/125 µm OM4

Replace hashtag (#) in AFL No. with jacket colour. See Tactical Cable Ordering Guide on page 23.

Customer specified print available.

Qualifications

GOVERNING BODY	STANDARD CODE	COMPONENT
EIA/TIA	EIA/TIA-455-33, EIA/TIA-455-37, EIA/TIA-455-104, EIA/TIA-455-41, EIA/TIA-455-25, EIA/TIA-455-3, EIA/TIA-455-5 Method B, EIA/TIA-455-4, EIA/TIA-455-98	Fibre Optic Cable
U.S. Department of Defense	MIL-PRF-49291 MIL-PRF-85045	Optical Fibre Fibre Optic Cable

Temperature Specifications

TEMPERATURE RANGE	
INSTALLATION	-46°C to +85°C
OPERATION	-46°C to +85°C
STORAGE	-55°C to +85°C

Contact AFL for further details.