

FEEDER BREAKER

CSH-B500

Conveyor & Crusher Machine

Built with High-Grade Steel, Robust and Heavy-Duty components for exceptional durability. The Feeder breaker offers outstanding stability, enhanced conveying capacity and efficient crashing ability. Its construction extends operating time and ensures superior performance.


Overview

- Extended Operating Time
- High Crushing Performance
- Ease of Maintenance Access
- High Quality & Durability

Technical Data

Hydraulics		Environment Data	
Operating Pressure		Noise Level Measured	
Flow Rate		Noise Level Guaranteed	
Tank Capacity		Operating Fluids	
Mechanical Details		Oil Volume	
Conveyor Drive Motor	Weg, 37kW Foot Mount	Cooling Fluid Volume	
Terminal Box Top Side	225S/M	Hydraulic Fluid Volume	
Cone Drive Motor	Weg, 75kW Foot Mount	Chassis	
Terminal Box Top Side	250S/M		
Power Train Detail		Construction	High-Grade Steel
Cooling		Weight	11,000 kg (11 Tons)
Prime Mover		Shipping & Storage	
Effective Power		Shipping Length	10,825 mm
Operating Power		Shipping Width	3,195 mm
Operating Engine Speed		Shipping Height	2,440 mm
Manufacturer		Shipping Weight	27,000 kg (27 Tons)
Motor Designation			

Dimensions

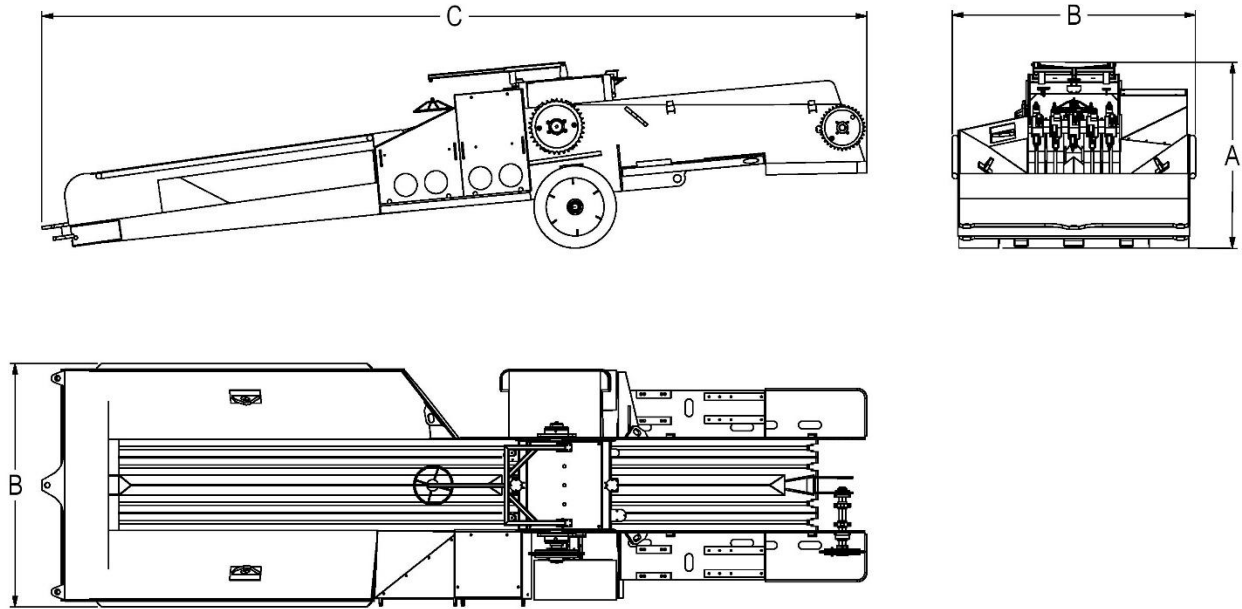

A	Height with Cab	2,440 mm
B	Width	3,195 mm
C	Length	10,825 mm
W	Weight (kg)	27,000 kg (27 Tons)