


INDUSTRIAL & SPORTS LIGHTING

POURSUIT / FOCUS

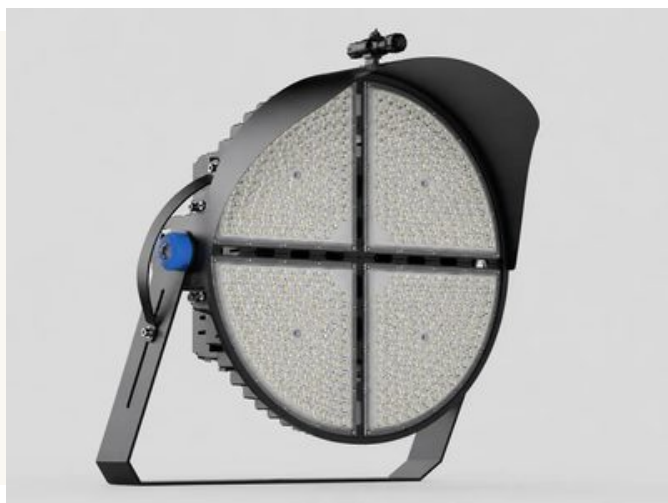

TECHNICAL DESCRIPTION

Long-throw tracking floodlight, 160 lm/W, IP66 and IK08, from 400 W to 1800 W. Concentrated beam for floodlighting, ports and very high masts.

FEATURES

160 lm/W

IP66

IK08

400-1800W

2300-6500K

TECHNICAL SPECIFICATIONS

VOLTAGE	AC85–305V	FREQUENCY	50/60 Hz
LED LIFESPAN	> 100 000 h	LED CHIP TYPE	SMD3030 SMD5050
DRIVER	Philips Inventronics	BEAM ANGLE	15° 30° 45° 60°
MATERIAL	Aluminium (ADC12) + PC	WORKING TEMPERATURE	-30°C ~ 50°C
IP RATING	IP66	IK RATING	IK08
LUMEN MAINTENANCE	> 90%		

REFERENCES

SSA code	Designation	Power	Flux (lm)	Efficacy (lm/W)	Colour temp.	Dimensions
63 00 50	Projecteur Poursuite-160lum/w-IK08-IP66	400 W	64000	160	2300-6500K	438 × 434 × 356 mm
63 00 60	Projecteur Poursuite-160lum/w-IK08-IP67	600 W	96000	160	2300-6500K	592 × 509 × 423 mm
63 01 20	Projecteur Poursuite-160lum/w-IK08-IP68	1200 W	192000	160	2300-6500K	697 × 649 × 520 mm

Technical data is subject to change without prior notice.

SSA code	Designation	Power	Flux (lm)	Efficacy (lm/W)	Colour temp.	Dimensions
63 01 80	Projecteur Poursuite-160lum/w-IK08-IP69	1800 W	288000	160	2300-6500K	831 × 772 × 570 mm

Technical data is subject to change without prior notice.