


HIGH FLOW
S-SERIES

SELF PRIMING MONOBLOCK PUMP



S2, S1

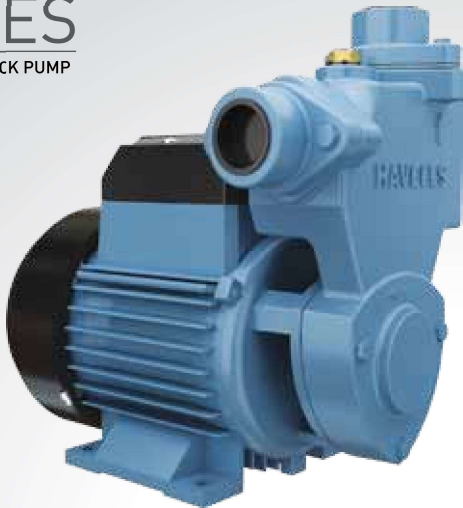

S1.5W

Features:

- Motor body: High quality aluminum pressure die casted / extruded
- 50 Hz single phase AC power supply
- Motor Insulation Class F
- In-built thermal overload protector (T.O.P.)
- IP-65 protection available in select model
- CED coated cast iron hydraulic parts for corrosion free performance
- Stainless Steel Shaft SS410 / Carbon Steel Shaft
- Pump Casing: Cast iron FG 200

Model	Power		Pipe Size (Suc x Del)	Total Head in metre															
				6 m	9 m	12 m	15 m	18 m	21 m	24 m	27 m	30 m	33 m	34 m	40 m	45 m	50 m	56 m	57 m
	kW	HP	mm	Discharge in Litre per Hour															
S2	0.37 kW	0.5 HP	25 mm x 25 mm	2700	2550	2350	2150	1870	1570	1360	1080	900	610	490					
S1	0.75 kW	1.0 HP	25 mm x 25 mm	4200	4000	3860	3600	3440	3120	2880	2600	2420	2160	2100	1730	1360	1090	640	
S1.5W	1.1 kW	1.5 HP	25 mm x 25 mm					4700	4500	4300	4100	3850		3550	3030	2580	2100		1400