

+91 8299598884, +91 9336624074 +91 8127090401, +91 8004667745

Techsonelevator@gmail.com

537U/ 0787 F, Bharat Nagar Sitapur Road Lucknow, Uttar Pradesh (226021)



Scan the QR Code to get the Details.

OUR PRODUCT & SERVICES

MANUAL DOOR

Capacity option from 15 to 26 Passengers, Speed Option from 0 35m/sec to 1 5m/sec, PVC/Chequered flooring, Various types of Door options such as collapsible/imperforted/
Telescopic automatic center opening doors, Car and door finish options - powder coated/ Stainless Steel Digital/LCD floor indication in LOP & COP Blower fan for multi-cross air delivery

Person	Car Inside		Lift-Well					
	Kg	Α	В	С	D	E		
4	272	1100	700	1600	1250	700		
5	340	1100	880	1600	1300	750		
6	408	1100	1000	1600	1400	750		
8	544	1300	1100	1800	1600	750		
10	680	1350	1300	1850	1800	1000		
13	884	2000	1100	2500	1600	1000		
16	1088	2000	1300	2500	1800	1000		
20	1360	2000	1550	2500	2050	1000		








AUTO DOOR ELEVATOR

Our auto door elevator are durable by design and accurate by technology. We have a wide range of these elevators which are most reliable and designed to suit every construction requirement and provide best vertical transport solutions, with trouble free performance and low maintenance cost. These elevators are a perfect blend of all good features of various types of elevators. These have excellent record of customer satisfaction.

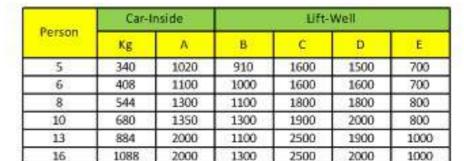

1550

2500

2300

1000

TECHSON ELEVATOR Page No.: 01

20


1360

2000

TRACTION ELEVATOR

Machine room less elevators do not have a fixed machine room on the top of the hoist way, instead the traction hoisting machine is installed either on the top side wall of the hoist way or on the bottom of the hoist way. The motor is installed using a permanent and work with Variable Voltages Variable Frequency (VVVF). Drive Some of the hoisting machines are using gearless synchronous motors instead conventional induction motors. This design eliminates the needs of a fixed machine room and thus saves much building's space. Almost all the traction MRL elevators are gearless traction.

	Opening (pen)	Opening (mm)	Side Opening (mm)	Opening (mm)	Side Opening (mm)	Center Opening (mm)
OAD	630	630	1000	1000	1000	1000
PERSONS	- 8	8	13	13	13	13
CAR WIDTH	1100	1100	1100	1100	1600	1600
CAR DEPTH	1400	1400	2100	2100	1400	1400
HIDIM SOOC	900	900	900	900	900	900
DOOR HIGHT	2000	2000	2000	2000	2000	2000
SHAFT WIDTH	1700	2000	1700	2000	2200	2500
SHAFT DEPTH	1800	1750	2500	2450	1800	1750
HAFT DEPTH THROUGH CAR	1950	1900	2650	2600	1950	1900
PIT DEPTH	1200	1200	1200	1200	1200	1200
HEADROOM	3600	3600	3600	3600	3600	3600







HOSPITAL ELEVATOR

Our hospital elevators are used for simple transportation of a patient on wheel chair to wheeling away a critical patient on stretcher without disturbing the life support system with doctors and nurses. These elevators are smooth, Silent and swift without jerks and shocks. Techson Elevator offer wide range of these types of elevators in auto door and manual door operations.

Automatic Center Opening Door

Person	Capacity	Shaft-W	Shaft D	Car-W	Car-D	Entrance
	Kg	A	8	C)	D	E
15	1020	1800	3000	1000	2400	800
20	1360	2300	3000	1300	2400	900
26	1768	2500	3000	1600	2400	1000

Automatic Telescopic Door

Marketon -	Capacity	Shaft-W	Shaft-D	Car-W	Car-D	Entrance	
Person	Kg	A		C.	D	É	
15	1020	1700	3000	1000	2400	800	
20	1390	1950	3000	1300	2400	900	
26	1768	2100	3000	1600	2400	1000	

CAPSULE ELEVATOR

Technology, applying fully digital vector variable frequency drive technology and matching with the noble European decoration style. When the evening fall, in the background of neon lights up and down elevator become a following scenery in the Urban city. At the same time, it is wonderfully display the design concept of "safety, smoothness, attraction and harmony." These types of Elevators can be extensively used in shopping malls, high grade offices and other important public civil Infrastructures.

Options - A

199			Certificate				Centracex				Jaff Well				Tall Well			
Person.	90.	ALC: NO.	100	10	15.0		0.0	- F-		150								
12	600	1160	1330	14000	- 600	12/20	1326	1683	112	100								
111	1004	1700	1800	1980	700	1420	1424	1883	(11)22	800								
36	1088	180	1800	1100	His	1930	1380	1993	13/2	2000								

Options - B

A	CH STREET				Car Still Str. Lett 1				Bitimer
Parister	90		CONTRACT	- 0	Land Co.	_ TO	1000	- 18	ELIVERATE OF
10.	680	1350	1300	254	2206	3450	1458	346	900
11	884	1400	1400	300	2406	2550	1634	655	900
16	1001	1590	(300	. 138	1800	1790	1858	716	1800







HYDRAULIC ELEVATOR

Looking for a low-maintenance elevator? Hydraulic lifts provide the advantages of being relatively in expensive, safe and easy to maintain. They're very convenient and cost-effective least solution for low-rise building with low traffic. Hydraulic elevator has been rated the safest option for home elevators. They boast superb user friendliness and easy access machine room located at the basement. Once they are put in place hydraulic Elevators provide that smoothest rides possible.

Person	Capacity	Car-W	Car-D	Shaft-W	Shuft-D	
PETSON	Kg	(A)	8	10 10	- 0	
3	204	900	1500	1900	1500	
4.	272	850	1050	1550	1550	
-50	340	1000	1200	1600	1600	
- 6	408	1100	1250	1700	1700	
8	544	1200	1500	1700	3800	
10	680	1200	1700	1700	2000	
12	844	1300	1800	1900	2100	
15	1088	1300	2200	2000	2500	
20	1428	1400	2500	2100	2800	
24	1700	1500	2500	2200	2800	

GOODS ELEVATOR

Our good Elevators are essential designed to fulfill material handling requirement of various industries, building, Hotels etc. For a properly engineered installation, the choice of freight elevator requires consideration of factors such as volume and weight of material to be transported and the method of handling such as manual for trolley driven. Today goods Elevators are back bone of any modern industry and find the place of Pharmaceutical, Petrochemical, Telecom, Components, Garments, Cosmetic, Architects, Constructions and Hotel Industries to name a few

Capacity	Shaft-W	Shart-D	C2r-W	Car-D	Entrance
Kgs	C	D	A	В	.E.
500	1900	1500	1100	1200	800
1000	2300	2100	1400	1800	900
1500	2600	2300	1700	2000	1200
2000	2600	2800	1700	2500	1400
2500	2900	2800	2000	2500	1600
3000	2900	3300	2000	3000	1800





ESCALATOR 35° JY-ZEPL35°



Aire	University of	Part Weight.	Supporting Force #E.	happorting horse Na.	POWN	Supporting State	Supproling 5:00
_	300	300 54 48 99		260	10181		
	3500	57	H ₂	4)	8	260	11090
W-279L	4000	- 90	2.9	- 44	5.0V	2900	11890
4500	4500	- 66	- 52	46	3.1	2940	12750
-4300	5500	- 67	194	49	74000	2079	13640
	5500	. 70	57	53	4	2002	16430
	6000	73	(0)	54	1	3000	15130
3000 3500 4000	3033	- 36	40	- 44		280	10110
	3500	1 160	122	- 47	2000	260	11093
	4000	- 63	25	. 53	5.1	2000	11800
Y-21 PL35	4533	66	.50	. 53		2340	12751
480	5000	70	62	. 56	0.73.57	2010	13801
	5500	73	65	50		2380	14470
- 1	6000	76	60	61	MADEY.	9300	15391
	5000	:60	.56	90	38.63	2000	10181
	3500	16	60	53	10990	2650	11090
· service	40000	- 67	194	52	Orași.	2309	11890
0000 0000	4900	- h	67	- 40	1	2940	12791
	50000	74	71	64	distrant.	299	13607
	5500	- 82	- 77	69	- 11	260	(443)
	6000	45	81	72	CHARLE.	3000	15331



RANGE OF AUTO DOOR







RANGE OF MANUAL DOOR & CAR







RANGE OF CABIN









SAFETY FEATURE

- 1 Infrared Light Curtain
- 2 Over Load Sensor With Audio Visual Indicator
- 3 Slot Less Door Sills
- 4 Car Emergency Light & Fan
- 5 Emergency Alarm & 'push To Talk'
- 6 Emergency Rescue Button
- 7 Safety In Case Of Over Travel
- 8 Safety In Case Of Rope Breakage
- 9 Pu Buffers
- 10 Car Fan Automatic Sleep
- 11 Voice Annunciator With Music
- 12 Microprocessor Based V3f (variable Voltage, Variable Frequency), Vector Controlled Drive With Encoder Feedbach Closed Loop System Door Operation



Office: 537U/0787 F, Bharat Nagar Sitapur Road Lucknow, Uttar Pradesh (226021) Contact No: +91 8299598884, +91 9336624074, +91 8127090401, +91 8004667745 Email ID: Techsonelevator@gmail.com