
orient filtr

PRODUCT GUIDELINE

FILTER PART

Focus on High-Precision Filtration

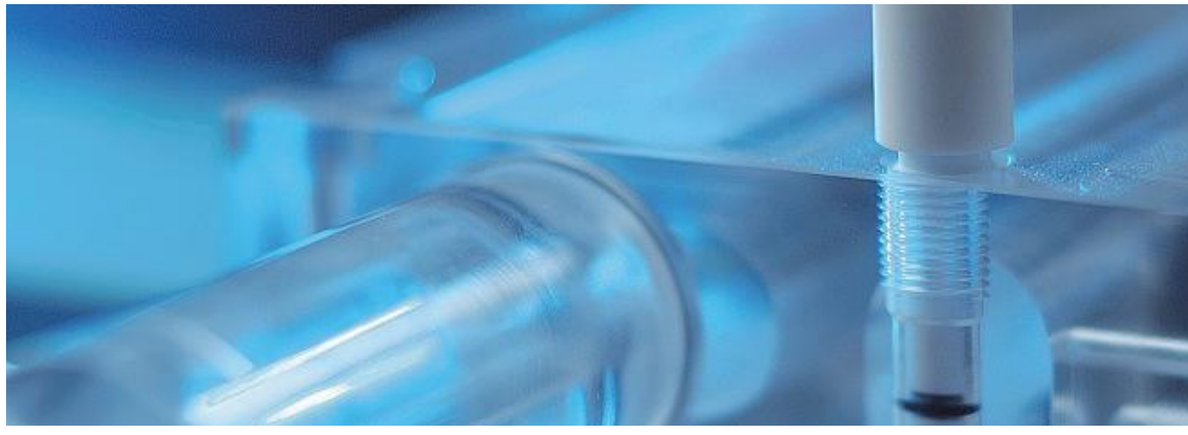

Orientfiltr Technology Co., Ltd

Web: www.orientfiltr.com

Email: info@orientfiltr.com

USA Toll Free: 800-293-3858

Address: No. 688, Xingfu Road, Chongchuan District, Nantong, Jiangsu, China

CONTENTS

Company Profile 1-2

CapFlux™ Series Capsule Filter 3-12

CapFlux™ Series PP Capsule Filter
CapFlux™ Series PES Capsule Filter
CapFlux™ Series PTFE Capsule Filter
CapFlux™ Series PVDF Capsule Filter
CapFlux™ Series Ny66 Capsule Filter

SteriFlux™ Series Pleated Cartridge Filter 13-28

SteriFlux™ Series PP Pleated
SteriFlux™ Series GF Pleated
SteriFlux™ Series PES Pleated
SteriFlux™ Series PTFE Pleated
SteriFlux™ Series PVDF Pleated
SteriFlux™ Series Ny66 Pleated
SteriFlux™ Series Mini Filter Pleated
SteriFlux™ Series Lenticular Filter
SteriFlux™ Series Stainless Steel Filter Cartridge

SupFlux™ Series High Flow Cartridge Filter .....

- SupFlux™-P Series High Flow
- SupFlux™-M Series Outer High Flow
- SupFlux™-K Series Inner High Flow
- SupFlux™-A Series High Flow
- SupFlux™-B Series High Flow
- SupFlux™-E Series High Flow

AquaFlux™ Series Sediment Cartridge Filter 35-43

- AquaFlux™ Series Melt Blown
- AquaFlux™ Series Nylon Melt Blown
- AquaFlux™ Series String Wound
- AquaFlux™ Series Oilfield Standard Pleated
- AquaFlux™ Series Standard Bag Filter
- AquaFlux™ Series UltraGlass-A Resin Bonded Filter
- AquaFlux™ Series PBT Pleated
- AquaFlux™ Series Multi Layers Media Pleated

SteelFlux™ Series Filter Housing 44-52

- SteelFlux™ Series Sanitary Filter Housing
- SteelFlux™ Series Security Filter Housing
- SteelFlux™ Series Membrane Filter Housing
- SteelFlux™ Series Lenticular Filter Housing
- SteelFlux™ Series Standard Bag Filter Housing
- SteelFlux™ Series High Flow Filter Housing
- SteelFlux™ Series FRP High Flow Filter Housing

COMPANY PROFILE

Since 2015, Orientfiltr Technology Co., Ltd has been specializing in advanced filtration solutions, providing high-quality filters, membranes, and housings to a diverse range of industries, including water treatment, food and beverage, oil and chemicals, electronics, petrochemical, seawater desalination, and power plants.

orient filtr

Certification


CERTIFICATE

The Certification Body of TÜV SÜD Asia Pacific TÜV SUD Group certifies that

Orientfiltr Technology Co., Ltd.
3F/4F, Building 4, No. 688 Xinglu Road, Chongchuan District, Nantong City, Jiangsu Province, P.R. China
Post Code : 226007

Unified social credit code / Organization code: 91320602MACC6B0DJU

has established and applies a Quality Management System for

Design, Manufacture and Sales of Microfiltration Membranes, Laboratory Syringe Filters and Industrial Filters

An audit was performed, Report No. 7482483222.
Proof has been furnished that the requirements according to

ISO 9001:2015

are fulfilled. The certificate is valid from 2023-12-21 until 2026-12-20.

Date of Initial Certification : 2023-12-21
Certificate Registration No. : TUV100 03 5011
2023-10-21

Information about this certificate can be inspired at the official website of Certification and Accreditation Administration of the People's Republic of China (www.cnca.gov.cn).

The certified organization shall undergo and pass the regular surveillance audit to maintain the validity of this certificate.


Safenet Certification Services Ltd.

Attestation of Conformity

This is to certify that

Orientfiltr Technology Co., Ltd.

No. 688, Xinglu Road, Chongchuan District, Nantong, Jiangsu, China

Has had a range of Membrane Filters for Laboratory Analysis examined with regard to the General Product Safety Directive 2001/95/EC.

In respect of model CNY4722

Manufactured by

Orientfiltr Technology Co., Ltd.

No. 688, Xinglu Road, Chongchuan District, Nantong, Jiangsu, China

1. The technical reports contain all the relevant information.
2. Having verified that the appropriate tests have been conducted:
2.1. The standards and transposed standards as the case may be, have been applied correctly.
2.2. The examples representing series production of the item, complies with the above mentioned Directive 2001/95/EC.
2.3. The technical file contains all the information required to include the models listed in the attached annex to this attestation.

Number: 4021190923
Date: 26/09/2023

Signed for Safenet Certification Services Ltd.

Peter McNicol
Technical Manager


International Halal Certificate
شهادة الحلال

CERTIFICATE NUMBER: SSFT.251115.52282

It is hereby certified that:

Total 13 Products
As Attached,Page 2

manufactured/distributed/managed by:

Company Name: Orientfiltr Technology Co., Ltd
Company Address: No.688,Xinglu Road,Chongchuan District,Nantong, Jiangsu,China

Has complied with the Halal Requirements according to the Shariah (Islamic Law).

Issued on: 15th Dec, 2023
Valid until: 13th Dec, 2024

Halal Kassim Tar Dumpling Restaurant
Shaanxi Shang Pin Yuan Halal Food &Restaurant Management Co.,Ltd (SSPY)

Certification Body in China


SGS

Test Report


SGS

Test Report


SGS

Test Report

Filter Cartridge Manufacturer——Focus on high-precision filtration

Orientfiltr Technology Co., Ltd is a professional one-stop manufacturer and supplier of filtration solutions. We are dedicated to delivering high-quality filtration products that meet the diverse needs of customers worldwide. Our commitment extends to providing exceptional service while promoting health, safety, and environmentally sustainable development.

CapFlux™ Series Capsule Filter-- Absolute PP Material

CapFlux™ Series Single Use Disposable capsule filters feature a wide range of filter media suitable for pharmaceutical, biotechnology, life science, and semiconducto applications. Their multi-layer graded PP structure provides greater particle holding capacity and effective particle removal, ensuring high flow rates and low-pressure drops. They are perfect equivalents to Kleen-pak, OptiCap, and MidiCap filters.




Feature

1. Disposable Design for Convenience and Contamination Prevention.
2. Suitable for Autoclave Steam Sterilization (121°C for 30 Minutes, 5 Cycles) and Gamma Sterilization (40-50 KGy).
3. Wide Range of Chemical Compatibility.
4. Higher Particle Holding Capacity with Lower Differential Pressure Drop.
5. Absolute Filtration Efficiency.

Application

1. Fine Chemical
2. Food and Beverage
3. Pharmaceutical
4. Digital Ink
5. Organic Solvent
6. Industrial Water Treatment



Semiconductor



Fine Chemical



Pharmaceutical



Fermentation

Material Construction

Filter Media	Polypropylene
Supporter	PP No Woven Fiber
Cage	PP/Anti Gamma PP

Specification

Length	1.25", 2.5", 3", 5", 8", 10", 20"
Micron Rate	0.1μm~5.0μm
Diameter -OD	72mm, 87mm
Surface Area	200 cm^2/500 cm^2/1300 cm^2/ 2500 cm^2/ 6300 cm^2/ 12500 cm^2

Operation Condition

Max. Pressure Drop	0.55Mpa@25℃/0.20Mpa@75℃
Max. Working Temp.	80℃
Burst Pressure	0.85Mpa
Sterilization	AutoClave Steam Sterile/(121℃ 30min 5cycles) Gamma Sterile/(<40~50Kgy)

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sterile
F	CP	PP2	05	B	1	PG
M-BioPharma	CP-Capsule Filter	PP2-Absolute PP	01-1.25"	A-0.1μm	1-1-1/2"Tri-Clamp	N-No Sterile
F-Food&Beverage		PD-Double layers PP	02-2.5"	B-0.2μm	2-1/4" MNPT	AS-AutoClave Sterile
			03-3"	B2-0.22μm	3-3/8"MNPT	GS-Gamma Sterile
			05-5"	C-0.45μm	4-1/2" MNPT	PG-Pre Gamma Sterile
			08-8"	F-1.0μm	5-1/4"HoseBarb	
			10-10"	AB-0.2+0.1μm	6-3/8"HoseBarb	
			20-20"	BC-0.45+0.2μm	7-1/2"HoseBarb	
				BB-0.2+0.2μm	8-1/4"~3/8"Stepped Hose Barb	

CapFlux™ Series Capsule Filter— Sterile Grade PES Material

CapFlux™ Series Single Use Disposable capsule filters are available with a wide range of filter media for use in pharmaceutical, biotechnology, life science, and semiconductor applications. Each filter undergoes 100% integrity testing, ensuring superior bacteria and particle removal at high flow rates and low-pressure drops. They are perfect equivalents to Kleenpak, OptiCap, and MidiCap filters.




Feature

1. Disposable Design For Convenience and Contamination Prevention.
2. Suitable for Autoclave Steam Sterilization (121°C for 30 Minutes, 5 Cycles) and Gamma Sterilization (40-50 KGy).
3. Wide Range of Chemical Compatibility.
4. 100% Integrity Tested for All capsule Filter Cartridges.
5. Primarily Used for The Removal of Particles, Bacteria, Viruses, and Mycoplasma.

Application

1. Fine Chemical
2. Food and Beverage
3. Pharmaceutical
4. Bio Pharma
5. Fermentation
6. Semiconductor



Semiconductor



Fine Chemical



Pharmaceutical



Fermentation

Material Construction

Filter Media	Sterile Grade PES
Supporter	PP No Woven Fiber
Cage	PP/Anti Gamma PP

Specification

Length	1.25", 2.5", 3", 5", 8", 10", 20"
Micron Rate	0.1μm~5.0μm
Diameter -OD	72mm, 87mm
Surface Area	200 cm^2/500 cm^2/1300 cm^2/ 2500 cm^2/ 6300 cm^2/ 12500 cm^2

Operation Condition

Max. Pressure Drop	0.55Mpa@25℃/0.20Mpa@75℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa
Burst Pressure	0.85Mpa
Sterilization	AutoClave Steam Sterile/(121℃ 30min 5cycles) Gamma Sterile/(<40~50KGy)

Bacteria Challenge

B.diminuta	LRV>7	0.22μm
Serratia Marcescens	LRV>7	0.45μm

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sterile
F	CP	SS	05	B	1	PG
M-BioPharma	CP-Capsule Filter	SS-Sterile PES	01-1.25"	A-0.1μm	1-1-1/2"Tri-Clamp	N-No Sterile
F-Food&Beverage		SD-Double layers PES	02-2.5"	B-0.2μm	2-1/4" MNPT	AS-AutoClave Sterile
			03-3"	B2-0.22μm	3-3/8"MNPT	GS-Gamma Sterile
			05-5"	C-0.45μm	4-1/2" MNPT	PG-Pre Gamma Sterile
			08-8"	F-1.0μm	5-1/4"HoseBarb	
			10-10"	AB-0.2+0.1μm	6-3/8"HoseBarb	
			20-20"	BC-0.45+0.2μm	7-1/2"HoseBarb	
				BB-0.2+0.2μm	8-1/4"~3/8"Stepped	

CapFlux™ Series Capsule Filter— Hydrophobic PTFE Material

CapFlux™ Series Single Use Disposable capsule filters feature a wide range of filter media, suitable for applications in pharmaceuticals, biotechnology, life sciences, and semiconductor processes. Hydrophobic PTFE membranes are extensively used for gas venting and air sterilization processes, serving as a perfect equivalent to Kleenpak, OptiCap, MidiCap, and similar products.




Feature

1. Disposable Design for Enhanced Convenience and Contamination Prevention.
2. Suitable for Autoclave Steam Sterilization (121°C for 30 Minutes, up to 5 cycles) and Gamma Steriliza-tion (40-50 KGy).
3. PTFE Material Offers A Wide Range of Chemical Compatibility.
4. Features Super Hydrophobicity, High Flow Rate, and Excellent Sterile Performance.
5. Each Capsule Undergoes a 100% Integrity Test.

Application

1. Fine Chemical
2. Food and Beverage
3. Pharmaceutical
4. Bio Pharma
5. Fermentation
6. Semiconductor



Semiconductor



Fine Chemical



Pharmaceutical



Fermentation

Material Construction

Filter Media	Hydrophobic PTFE
Supporter	PP No Woven Fiber
Cage	PP/Anti Gamma PP

Specification

Length	1.25", 2.5", 3", 5", 8", 10", 20"
Micron Rate	0.1μm~5.0μm
Diameter -OD	72mm, 87mm
Surface Area	200 cm^2/500 cm^2/1300 cm^2/ 2500 cm^2/ 6300 cm^2/ 12500 cm^2

Operation Condition

Max. Pressure Drop	0.55Mpa@25℃/0.20Mpa@75℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa
Burst Pressure	0.85Mpa
Sterilization	AutoClave Steam Sterile/(121℃ 30min 5cycles)

Bacteria Challenge

B.diminuta	LRV>7	0.22μm
Serratia Marcescens	LRV>7	0.45μm

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sterile
F	CP	TB	05	B	1	AS
M-BioPharma F-Food&Beverage	CP-Capsule Filter	TB-Hydrophobic PTFE PD-Double layers PP	01-1.25" 02-2.5" 03-3" 05-5" 08-8" 10-10" 20-20"	A-0.1μm B-0.2μm B2-0.22μm C-0.45μm F-1.0μm AB-0.2+0.1μm BC-0.45+0.2μm BB-0.2+0.2μm	1-1-1/2"Tri-Clamp 2-1/4" MNPT 3-3/8"MNPT 4-1/2" MNPT 5-1/4"HoseBarb 6-3/8"HoseBarb 7-1/2"HoseBarb 8-1/4"~3/8"Stepped	N-No Sterile AS-AutoClave Sterile

CapFlux™ Series Capsule Filter— Hydrophilic PVDF Material

CapFlux™ Series Single Use Disposable capsule filters offer a wide range of filter media suitable for applications in pharmaceuticals, biotechnology, life scienc-es, and semiconductor processes. The hydrophilic PVDF material features the lowest protein binding, providing a disposable design with enhanced biosafety. These capsule filters are widely used in biopharmaceuticals, plasma, and cell culture media processes, serving as perfect equivalents to Kleenpak, OptiCap, MidiCap, and similar products.




Feature

1. Disposal Design for More Convenient and Anti-contaminate.
2. Available on Auticlave Steam Sterile(121℃ 30min 5cycles) and Gamma Sterile(<40~50KGy).
3. Lowest Protein Bonding and Absorption.
4. 100% Integrity Test for All Capsule Filter.
5. Absolute Ratio Efficiency.

Application

1. Fine Chemical
2. Food and Beverage
3. Pharmaceutical
4. Bio Pharma
5. Culture Media
6. Semiconductor



Semiconductor



Fine Chemical



Pharmaceutical



Fermentation

Material Construction

Filter Media	Hydrophilic PVDF
Supporter	PP No Woven Fiber
Cage	PP/Anti Gamma PP

Specification

Length	1.25", 2.5", 3", 5", 8", 10", 20"
Micron Rate	0.1μm~5.0μm
Diameter -OD	72mm, 87mm
Surface Area	200 cm^2/500 cm^2/1300 cm^2/ 2500 cm^2/ 6300 cm^2/ 12500 cm^2

Operation Condition

Max. Pressure Drop	0.35Mpa@25℃/0.20Mpa@75℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa
Burst Pressure	0.85Mpa
Sterilization	AutoClave Steam Sterile/(121℃ 30min 5cycles) Gamma Sterile/(<40~50KGy)

Bacteria Challenge

B.diminuta	LRV>7	0.22μm
Serratia Marcescens	LRV>7	0.45μm

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sterile
F	CP	VL	05	B	1	PG
M-BioPharma F-Food&Beverage	CP-Capsule Filter	VL-Hydrophilic PVDF	01-1.25" 02-2.5" 03-3" 05-5" 08-8" 10-10" 20-20"	A-0.1μm B-0.2μm B2-0.22μm C-0.45μm F-1.0μm AB-0.2+0.1μm BC-0.45+0.2μm BB-0.2+0.2μm	1-1-1/2"Tri-Clamp 2-1/4" MNPT 3-3/8"MNPT 4-1/2" MNPT 5-1/4"HoseBarb 6-3/8"HoseBarb 7-1/2"HoseBarb 8-1/4"~3/8"Stepped	N-No Sterile AS-AutoClave Sterile GS-Gamma Sterile PG-Pre Gamma Sterile

CapFlux™ Series Capsule Filter— Nylon66/Charge Nylon Material

CapFlux™ Series Single Use Disposable capsule filters offer a wide range of filter media suitable for pharmaceutical, biotechnology, life science, and semiconductor applications. Nylon 66 material is ideal for aqueous solvents, while charged nylon is widely used for the removal of endotoxins, mycoplasma, and small viruses. These filters are perfect equivalents to Kleenpak, OptiCap, and MidiCap.




Feature

1. Disposable Design for Convenience and Contamination Prevention.
2. Suitable for Online Steam Sterilization (126°C for 30 Minutes, 5 Cycles) and Gamma Sterilization (40-50 KGy).
3. Wide Range of Chemical Compatibility.
4. Option for Positively Charged Nylon 66.
5. Each Capsule Undergoes 100% Integrity Testing.

Application

1. Fine Chemical
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. High Temp Water



Semiconductor



Fine Chemical



Pharmaceutical



Fermentation

Material Construction

Filter Media	Nylon66/Charged Nylon
Supporter	PP No Woven Fiber
Cage	PP/Anti Gamma PP

Specification

Length	1.25", 2.5", 3", 5", 8", 10", 20"
Micron Rate	0.1μm~5.0μm
Diameter -OD	72mm, 87mm
Surface Area	200 cm^2/500 cm^2/1300 cm^2/ 2500 cm^2/ 6300 cm^2/ 12500 cm^2

Operation Condition

Max. Pressure Drop	0.55Mpa@25℃/0.20Mpa@75℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa
Burst Pressure	0.85Mpa
Sterilization	AutoClave Steam Sterile/(121℃ 30min 5cycles) Gamma Sterile/(<40~50KGy)

Bacteria Challenge

B.diminuta	LRV>7	0.22μm
Serratia Marcescens	LRV>7	0.45μm

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sterile
F	CP	NY	05	B	1	PG
M-BioPharma F-Food&Beverage	CP-Capsule Filter	NY-Nylon66 NY2-Charged Nylon	01-1.25" 02-2.5" 03-3" 05-5" 08-8" 10-10" 20-20"	A-0.1μm B-0.2μm B2-0.22μm C-0.45μm F-1.0μm AB-0.2+0.1μm BC-0.45+0.2μm BB-0.2+0.2μm	1-1-1/2"Tri-Clamp 2-1/4" MNPT 3-3/8"MNPT 4-1/2" MNPT 5-1/4"HoseBarb 6-3/8"HoseBarb 7-1/2"HoseBarb 8-1/4"~3/8"Stepped	N-No Sterile AS-AutoClave Sterile GS-Gamma Sterile PG-Pre Gamma Sterile

SteriFlux™ Series PP Pleated-- Ideal For Pre Filtration and Clarification

SteriFlux™ Series PP Pleated Cartridge Filter with an excellent cost-performance ratio, these filters are ideal for pre-filtration and clarification in various applica-tions, offering a filtration efficiency rate of 99.98%.



Feature

1. Made Entirely from Polypropylene for Excellent Chemical Compatibility.
2. Available in Various Filtration Ratings to Meet Different Application Requirements.
3. Deep Filtration Construction Ensures A Longer Service Life and Lower Costs.
4. Manufactured Using a Thermal Welding Process, Free of Any Adhesives.
5. Larger Surface Area Results In Low Initial Pressure Drop and Higher Particle Holding Capacity.

Application

1. Fine Chemical
2. Food and Beverage
3. Pharmaceutical
4. Water Treatment
5. Fermentation
6. Semiconductor



Food & Beverage



Water Treatment



Pharmaceutical



Fine Chemical

Material Construction

Filter Media	100% Polypropylene
Supporter	PP No Woven Fiber
Cage	PP
Core	PP/SS 304/SS 316


Specification

Length	5", 10", 20", 30",40",50"
Micron Rate	0.1μm~10.0μm
Diameter -OD	69mm
Surface Area	0.3m^2, 0.6m^2, 1.2m^2,1.8m^2, 2.4m^2

Operation Condition

Max. Pressure Drop	0.50Mpa@25℃/0.20Mpa@75℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa
Sterilization	20times Autoclave @121℃ 30mins

Absolute PP Flow Rate VS Pressure Drop

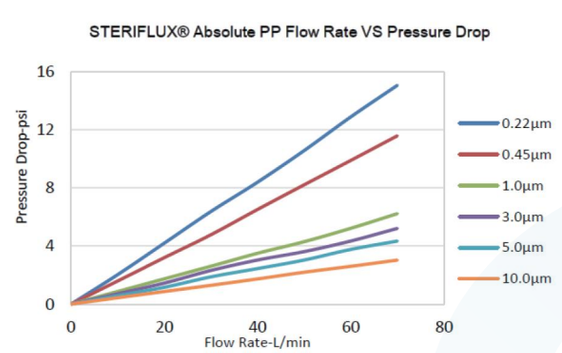


All components meet the EU and USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sealing
I	PF	PP1	10	F	C1	S
M-BioPharma	PF-Pleated Filter	PP1-Norminal PP	05=5"	A-0.1μm	D1-DOE	S-Silicone
F-Food&Beverage		PP2-Absolute PP	10-10"	B-0.2μm	B1-222/Flat	E-EPDM
C-Chemical			20-20"	B2-0.22μm	B2-222/Flat w/ SS insert	N-NBR
I-Industrial WaterTreatment			30-30"	C-0.45μm	B3-222/Fin	V-Viton
			40-40"	C5-0.5μm	B4-222/Fin w/ SS insert	F-Encapsuled Viton
			50-50"	D-0.65μm	B5-222/Fin w/ Tri-Lock	K-Encapsuled Silicone
			60=60"	E-0.8μm	C1-226/Fin	
			70=70"	F-1.0μm	C2-226/Fin w/ SS insert	
			80=80"	F2-1.2μm	C3-226/Flat	
				G-2.0μm	C4-226/Flat w/ SS insert	
				H-5.0μm	C5-226/Flat w/ guide hole	
				-10.0μm		

SteriFlux™ Series Glass Fiber Pleated— Glass Fiber Media



SteriFlux™ Series Glass Fiber Media cartridge filter is made with glass fiber media and polypropylene housing, utilizing a thermal bonding process that ensures no adhesives or surfactants are present.

Feature

1. Glass Fiber and Polypropylene Material for Excellent Chemical Compatibility.
2. Available in Different Filtration Ratings to Meet Various Application Requirements.
3. Deep Filtration Construction Ensures a Longer Service Life and Lower Cost.
4. Utilizes a Thermal Welding Process, Free of Any Adhesives.

Application

1. Fine Chemical
2. Food and Beverage
3. Pharmaceutical
4. Water Treatment
5. Fermentation
6. Semiconductor



Food & Beverage



Water Treatment



Pharmaceutical



Fine Chemical

Material Construction

Filter Media	Glass Fiber
Supporter	PP No Woven Fiber
Cage	PP
Core	PP/SS 304/SS 316


Specification

Length	5", 10", 20", 30",40",50"
Micron Rate	0.1μm~10.0μm
Diameter -OD	69mm, 83mm, 114mm
Surface Area	0.3m^2, 0.6m^2, 1.2m^2,1.8m^2, 2.4m^2

Operation Condition

Max. Pressure Drop	0.50Mpa@25℃/0.20Mpa@75℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa
Sterilization	20times Autoclave @121℃ 30mins

Pressure and Flow Rate

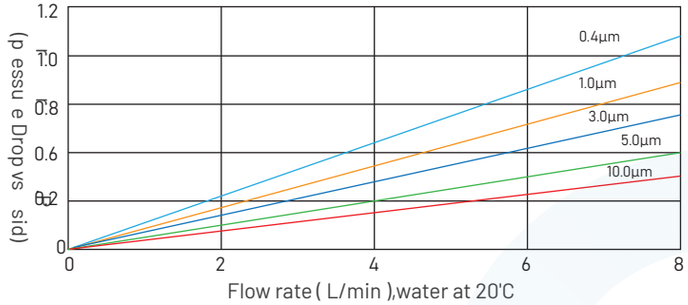

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sealing
I	PF	GF	10	F	C1	S
M-BioPharma	PF-Pleated Filter	GF-Glass Fiber	05=5"	Z-0.05μm	D1-DOE	S-Silicone
F-Food&Beverage			10-10"	A-0.1μm	B1-222/Flat	E-EPDM
C-Chemical			20-20"	B-0.2μm	B2-222/Flat w/ SS insert	N-NBR
I-Industrial WaterTreatment			30-30"	B2-0.22μm	B3-222/Fin	V-Viton
			40-40"	C-0.45μm	B4-222/Fin w/ SS insert	F-Encapsuled Viton
				C5-0.5μm	C1-226/Fin	K-Encapsuled Silicone
				D-0.65μm	C2-226/Fin w/ SS insert	
				E-0.8μm	C3-226/Flat	
				F-1.0μm	C4-226/Flat w/ SS insert	
				F2-1.2μm		
				AB-0.1+0.2μm		
				BB-0.2+0.2μm		

SteriFlux™ Series PES Pleated—Greater Bacteria and Particle Removal

SteriFlux™ Series PES membrane cartridge filter with a highly asymmetric PES membrane and PP housing. Manufactured using a thermal bonding process, it contains no adhesives or surfactants. Each filter undergoes a 100% integrity test, ensuring superior bacteria and particle removal at high flow rates and low pressure drop.



Feature

1. Excellent Chemical Compatibility.
2. Various Filtration Ratings to Meet Diverse Application Requirements.
3. Deep Filtration Construction for Longer Service Life and Reduced Cost.
4. Adhesive-free Thermal Welding Process.
5. Large Surface Area for Low Clean Up and Higher Particle Holding Capacity.

Application

1. Fine Chemical
2. Food and Beverage
3. Pharmaceutical
4. Water Treatment
5. Fermentation
6. Semiconductor



Food & Beverage



Water Treatment



Pharmaceutical



Fine Chemical

Material Construction

Filter Media	PES
Supporter	PP No Woven Fiber
Cage	PP
Core	PP/SS 304/SS 316

Specification

Length	5", 10", 20", 30",40"
Micron Rate	0.1μm~10.0μm
Diameter -OD	69mm
Surface Area	0.3m², 0.6m², 1.2m²,1.8m², 2.4m²


Operation Condition

Max. Pressure Drop	0.50Mpa@25℃ 0.20Mpa@75℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa
Sterilization	20times Autoclave @ 125℃ 30mins

Bacteria Challenge

B.diminuta	LRV>7	0.22μm
Serratia Marcescens	LRV>7	0.45μm

SteriFlux PES Flow Rate VS Pressure Drop

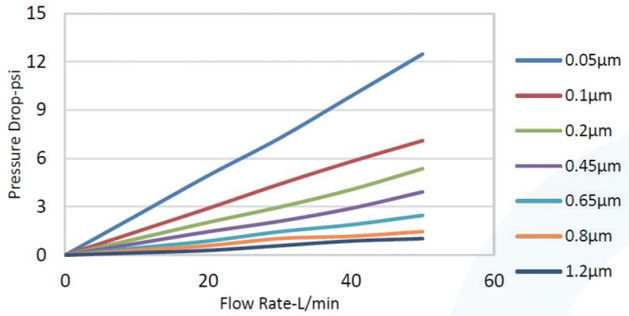


All components meet the EU and USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sealing
I	PF	SS	10	F	C1	S
M-BioPharma	PF-Pleated Filter	SS-Asymmetric PES	05=5"	Z-0.05μm	D1-DOE	S-Silicone
F-Food&Beverage		SD-DoubleLayersPES	10-10"	A-0.1μm	B1-222/Flat	E-EPDM
C-Chemical		SV-PES+PVDF	20-20"	B-0.2μm	B2-222/Flat w/ SS insert	N-NBR
I-Industrial WaterTreatment		SG-PES+Glass Fiber	30-30"	B2-0.22μm	B3-222/Fin	V-Viton
			40-40"	C-0.45μm	B4-222/Fin w/ SS insert	F-Encapsuled Viton
				C5-0.5μm	C1-226/Fin	K-Encapsuled Silicone
				D-0.65μm	C2-226/Fin w/ SS insert	
				E-0.8μm	C3-226/Flat	
				F-1.0μm	C4-226/Flat w/ SS insert	
				F2-1.2μm		
				AB-0.1+0.2μm		
				BB-0.2+0.2μm		

SteriFlux™ Series PTFE Pleated— Wide Range Of Aggressive Gas And Liquid

SteriFlux™ Series PTFE membrane cartridge filter is designed specifically for a wide range of aggressive gas and liquid processing applications, these cartridges are suitable for most chemicals and organic solvents. The hydrophobic PTFE membrane makes this cartridge an ideal choice for systems requiring excellent compatibility, reliability, and consistently high-quality filtrate.



Feature

1. Excellent Chemical Compatibility.
2. Wide Porosity Range.
3. Low Extractible Rate.
4. 100% Integrity Test.
5. Thermally Bonded and Adhesive Free.

Application

1. Fine Chemical
2. Food and Beverage
3. Pharmaceutical
4. Water Treatment
5. Fermentation
6. Semiconductor



Food & Beverage



Water Treatment



Pharmaceutical



Fine Chemical

Material Construction

Filter Media	Hydrophobic PTFE
Supporter	PP No Woven Fiber
Cage	PP
Core	PP/SS 304/SS 316

Specification

Length	5", 10", 20", 30",40"
Micron Rate	0.1μm~10.0μm
Diameter -OD	69mm
Surface Area	0.3m², 0.6m², 1.2m²,1.8m², 2.4m²


Operation Condition

Max. Pressure Drop	0.50Mpa@25℃ 0.20Mpa@75℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa
Sterilization	150times Autoclave @ 125℃ 30mins

Bacteria Challenge

B.diminuta	LRV>7	0.22μm
Serratia Marcescens	LRV>7	0.45μm

SteriFlux Hydrophobic PTFE Flow Rate VS Pressure Drop

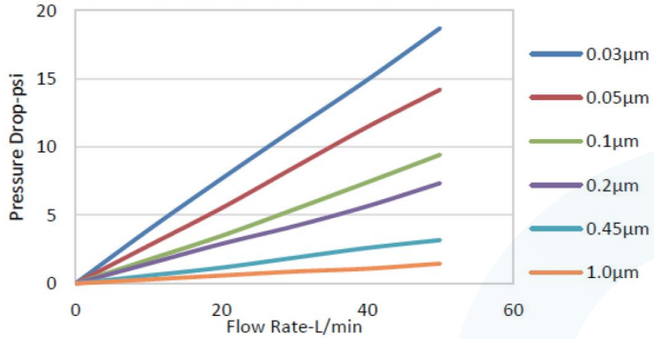

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sealing
I	PF	TB	10	F	C1	S
M-BioPharma	PF-Pleated Filter	TB-Hydrophobic PTFE	05=5"	Z-0.05μm	D1-DOE	S-Silicone
F-Food&Beverage		TL-Hydrophilic PTFE	10-10"	A-0.1μm	B1-222/Flat	E-EPDM
C-Chemical			20-20"	B-0.2μm	B2-222/Flat w/ SS insert	N-NBR
I-Industrial WaterTreatment			30-30"	B2-0.22μm	B3-222/Fin	V-Viton
			40-40"	C-0.45μm	B4-222/Fin w/ SS insert	F-Encapsuled Viton
				C5-0.5μm	C1-226/Fin	K-Encapsuled Silicone
				D-0.65μm	C2-226/Fin w/ SS insert	
				E-0.8μm	C3-226/Flat	
				F-1.0μm	C4-226/Flat w/ SS insert	
				F2-1.2μm		
				AB-0.2+0.1μm		
				BB-0.2+0.2μm		

SteriFlux™ Series PVDF Pleated—Lower Protein Bonding And High Flow Rate

SteriFlux™ Series Hydrophilic PVDF membrane cartridge filter uses a hydrophilic PVDF membrane as the filter media with PP housing. The PVDF membrane offers low protein binding and a high flow rate.



Feature

1. 100% Integrity Test for Excellent Performance.
2. Different Filtration Ratings to Meet Various Application Requirement.
3. Low Extractable and Protein Bonded Feature.
4. Suitable for Organic Solvents, Acids and Chemicals.

Application

1. Fine Chemical
2. Food and Beverage
3. Pharmaceutical
4. Water Treatment
5. Fermentation
6. Semiconductor



Food & Beverage



Water Treatment



Pharmaceutical



Fine Chemical

Material Construction

Filter Media	Hydrophilic PVDF
Supporter	PP No Woven Fiber
Cage	PP
Core	PP/SS 304/SS 316

Specification

Length	5", 10", 20", 30",40"
Micron Rate	0.1μm~10.0μm
Diameter -OD	69mm
Surface Area	0.3m^2, 0.6m^2, 1.2m^2,1.8m^2, 2.4m^2

Bacteria Challenge

B.diminuta	LRV>7	0.22μm
Serratia Marcescens	LRV>7	0.45μm

Operation Condition

Max. Pressure Drop	0.50Mpa@25℃/0.20Mpa@75℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa
Sterilization	150times Autoclave @125℃ 30mins


All components meet the EU and USA requirements for Food Contact Use in accordance with CFR(Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sealing
I	PF	VL1	10	F	C2	S
M-BioPharma	PF-Pleated Filter	VL-Hydrophilic PVDF	05=5"	Z-0.05μm	D1-DOE	S-Silicone
F-Food&Beverage		VL2-Double Layers Hydrophilic PVDF	10-10"	A-0.1μm	B1-222/Flat	E-EPDM
C-Chemical			20-20"	B-0.2μm	B2-222/Flat w/ SS insert	N-NBR
I-Industrial WaterTreatment			30-30"	B2-0.22μm	B3-222/Fin	V-Viton
			40-40"	C-0.45μm	B4-222/Fin w/ SS insert	F-Encapsuled Viton
				C5-0.5μm	C1-226/Fin	K-Encapsuled Silicone
				D-0.65μm	C2-226/Fin w/ SS insert	
				E-0.8μm	C3-226/Flat	
				F-1.0μm	C4-226/Flat w/ SS insert	
				F2-1.2μm		
				AB-0.1+0.2μm		
				BB-0.2+0.2μm		

SteriFlux™ Series Nylon66 Pleated—Ideal for Pre Filtration and Clarification

SteriFlux™ Series Nylon66 membrane cartridge filter features a hydrophilic nylon membrane, which provides extremely low protein absorption and a high flow rate.



Feature

1. Hydrophilic Nylon 66 Membrane without Pre-wetting.
2. Excellent Pliability and Uniform Pore Distribution for Effective Filtration.
3. Superior Chemical Compatibility.
4. No Fiber Release and Low Extractable Content.

Application

1. Fine Chemical
2. Food and Beverage
3. Pharmaceutical
4. Water Treatment
5. Fermentation
6. Semiconductor



Food & Beverage



Water Treatment



Pharmaceutical



Fine Chemical

Material Construction

Filter Media	Nylon 66/Charged Nylon
Supporter	PP No Woven Fiber
Cage	PP
Core	PP/SS 304/SS 316

Specification

Length	5", 10", 20", 30",40"
Micron Rate	0.1μm~10.0μm
Diameter -OD	69mm
Surface Area	0.3m^2, 0.6m^2, 1.2m^2,1.8m^2, 2.4m^2

Bacteria Challenge

B.diminuta	LRV>7	0.22μm
Serratia Marcescens	LRV>7	0.45μm

Operation Condition

Max. Pressure Drop	0.50Mpa@25℃/0.20Mpa@75℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa
Sterilization	150times Autoclave @125℃ 30mins

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR(Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sealing
I	PF	NY1	10	F	C2	S
M-BioPharma	PF-Pleated Filter	NY1-Nylon66	05=5"	Z-0.05μm	D1-DOE	S-Silicone
F-Food&Beverage		NY2-Nylon66 Positive Charged	10-10"	A-0.1μm	B1-222/Flat	E-EPDM
C-Chemical			20-20"	B-0.2μm	B2-222/Flat w/ SS insert	N-NBR
I-Industrial WaterTreatment			30-30"	B2-0.22μm	B3-222/Fin	V-Viton
			40-40"	C-0.45μm	B4-222/Fin w/ SS insert	F-Encapsuled Viton
				C5-0.5μm	C1-226/Fin	K-Encapsuled Silicone
				D-0.65μm	C2-226/Fin w/ SS insert	
				E-0.8μm	C3-226/Flat	
				F-1.0μm	C4-226/Flat w/ SS insert	
				F2-1.2μm		
				AB-0.1+0.2μm		
				BB-0.2+0.2μm		

SteriFlux™ Series Mini Pleated—Pall, Millipore, Sartorius, Parker Alternatives

SteriFlux™ Series Mini Cartridge Filter offers a wide range of filter media suitable for use in pharma-ceutical, biotechnology, life sciences, and semiconductor applications. Perfect equivalents for Junior, SLK, MiniCap, Optseal, and more.



Feature

1. 100% Integrity Test for Excellent Performance.
2. Different Filtration Ratings to Meet Various Application Requirement.
3. Low Extractable and Protein Bonded Feature.
4. Suitable for Organic Solvents, Acids and Chemicals.

Application

1. Fine Chemical
2. Food and Beverage
3. Pharmaceutical
4. Water Treatment
5. Fermentation
6. Semiconductor



Food & Beverage



Water Treatment



Pharmaceutical



Fine Chemical

Material Construction

Filter Media	PES, PTFE, PP, Nylon, PVDF
Supporter	PP No Woven Fiber
Cage	PP
Core	PP

Specification

Length	1.25″, 2.5″, 5″
Micron Rate	0.1μm~10.0μm
Diameter -OD	56mm
Surface Area	500cm², 1200cm², 2100 m²

Bacteria Challenge

B.diminuta	LRV>7	0.22μm
Serratia Marcescens	LRV>7	0.45μm

Operation Condition

Max. Pressure Drop	0.35Mpa@25℃/0.20Mpa@75℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa
Sterilization	50times Autoclave @121℃ 30mins


All components meet the EU and USA requirements for Food Contact Use in accordance with CFR(Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.



6T




8T



8TF



3TF



DT

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sealing
I	MF	NY1	10	F	C2	S
M-BioPharma	MF-Mini Pleated	PP2-Absolute PP	05=5″	Z-0.05μm	6T-116/Flat	S-Silicone
F-Food&Beverage		SS-Hydrophilic PES	10-10″	A-0.1μm	6TS-116/Flat with SS	E-EPDM
C-Chemical		TB-Hydrophobic PTFE	20-20″	B-0.2μm	insert,bayonet type	N-NBR
I-Industrial WaterTreatment		VI-HydorphilicPVD	30-30″	B2-0.22μm	6TB-116/Flat,bayonet type	V-Viton
		NY1-Nylon66	40-40″	C-0.45μm	6TF-126/Flat,bayonet	F-Encapsuled Viton
		NY2-Nylon66 Positive Charged		C5-0.5μm	8T-118/Flat	K-Encapsuled Silicone
				D-0.65μm	8TF-118 Flower/Flat	
				E-0.8μm	3TF-123 Flower/Flat	
				F-1.0μm	DT-Disc/Flat	
				F2-1.2μm		
				AB-0.1+0.2μm		
				BB-0.2+0.2μm		

SteriFlux™ Series Lenticular Filter—Ideal for Pre Filtration and Clarification

SteriFlux™ Series Lenticular Filter offering a good balance of cost and performance, ideal for pre-filtration and clarification in various applications.



Feature

1. Extended Lifespan with A Higher Flow Rate to Reduce Operational Costs.
2. Easy and Reliable Handling; Rigid External Clips Prevent Filter Sheet Damage During Module Loading.
3. No Filter Sheet Deformities After Heat Treatment.
4. Versatile Filtration Capabilities; Polymer Design Ensures Compatibility with Higher Temperatures and Chemicals.
5. High Performance Achieved through Optimal Utilization of Filter Surface Area.

Application

1. Fine Chemical
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. High Temp Water

Material Construction

Surface Media	Natural Diatomaceous Earths, Active Carbon
Material	Cellulose fibers, Resins, Perlite
Supporter	PP No Woven Fiber
Core	PP
Adaptor	DOE, 222/Flat
Sealing	Silicone, EPDM, Viton

Operation Condition

Max. Pressure Drop	0.24Mpa@25℃/0.16Mpa@75℃
Working Temp.	80℃
Change-Out ΔP	0.20Mpa
Sterilization	20times Autoclave @121℃ 30mins

Specification

Micron Rate	0.1μm~10μm
Diameter -OD	8", 12",16"
Construction	7/ 9/ 12/14/15/ 16cells

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR(Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Diameter	Micron	Construction	Adaptor	Sealing
F	LFF	DE	12	F	12	D1	S
M-BioPharma F-Food&Beverage	M-BioPharma F-Food&Beverage	DE-Diatomaceous Earth AC-Active Carbon	08-8" 12=12" 16-16"	A-0.1~0.2μm B-0.2~0.45μm C-0.45~0.65μm D-0.65~0.8μm E-0.8~1.2μm F-1.2~3.0μm	7-7Cells 9-9Cells 12-12Cells 14-14Cells 15-15Cells 16-16Cells	D1-DOE B1-222/Flat	S-Silicone E-EPDM N-NBR V-Viton

SteriFlux™ Series Stainless Steel Filter--High Temperature Resistance

SteriFlux™ Series Mini Cartridge Filter is designed with Stainless Steel woven wire mesh and fiber sintered felt media. The materials of main filter media include SS304, SS316L etc.



Feature

1. 1Large filtration area, wide range of filtering accuracy.
2. Low pressure drop, high porosity rate, excellent air permeability and filtration ability.
3. Offers excellent particle holding capacity and long lifespan at an economical cost.
4. Provides high temperature and corrosion resistance.
5. Easily cleaned using conventional chemical and ultrasonic methods.

Application

1. Fine Chemical
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. High Temp Water

Material Construction

Filter Media	SS304/ SS316L
Supporter	SS304/SS316L
Core	SS304/ SS316L
Oring&Gasket	EPDM/ Silicone/ Viton

Specification

Micron Rate	10" ~40"
Diameter -OD	1.0μm~300μm
Construction	2.36"(60mm) 2.48"(63mm) 2.68"(68mm)

Operation Condition

Max. Pressure Drop	1.0Mpa@25℃
Max. Working Temp.	-70℃~200℃
Effective Surface Area	0.15 ㎡/10"


All components meet the EU and USA requirements for Food Contact Use in accordance with CFR(Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sealing
F	PF	PLS	10	F	D1	E
M-BioPharma F-Food&Beverage C-Chemical I-Industrial Water Treatment	PF-Pleated Filter SF-Sintered Filter	PLS-304 Stainless Steel Pleated PLSS-316L Stainless Steel Pleated PLTS- Stainless Steel Sintered	05=5" 10-10" 20-20" 30-30" 40-40"	F-1.0μm H-5.0μm I-10.0μm J-20.0μm	D1-DOE B1-222/Flat	E-EPDM N-NBR V-Viton

SupFlux™-P Series High Flow— Ideal Alternative for Pall UltiPleat

SupFlux™-P Series High Flow cartridge filter is made by 100% Polypropylene material. With a large 6" outside diameter and a pleated design, it shows exceptional particle holding capacity and high flow rates



Feature

1. 100% Polypropylene, Glass Filled and SS Material.
2. Fewer Cartridge and Less Time to Assemble.
3. Handle Design Makes Quick Change.
4. Large Surface Area for Longer Lifespan.

Application

1. Seawater Desalination
2. Amine
3. Petrochemical
4. Solvent Based
5. Paints & Coatings
6. Power Plant

Material Construction

Filter Media	PP Pleated, GF Pleated,PP Melt Blown
Supporter	PP No Woven Fiber
Cage	PP Cage, Net Cage,SS Cage,Bonding Cage, Glass Filled Cage,Nylon Filled Cage

Operation Condition

Max. Pressure Drop	0.38Mpa@25℃//0.20Mpa@80℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa

Specification

Length	20",40",60'
Micron Rate	1μm~20μm
Diameter -OD	152mm

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR(Code of Federal Regulations) Title 21, EC/1935/2004and subsequent amendmentsandUSP<87>,<88>Biological tests for Class VI-121°C plastics, in vivo and Cytotoxicity tests in vitro.

Order Information

Application	Type	Material	Length	Micron	Core	Sealing	Cage
C	HF	PP1	40	F	N	S	PP
F-Food&Beverage C-Chemical I-Industrial Water Treatment	HF-High Flow	PP1-Norminal PP PP2-Absolute PP PP3-Thick Meida PG-Glass Fiber	20-20" 40-40" 60-60"	AF-1.0μm H-5.0μm I-10.0μm J-20.0μm	N=No Core P-PP core	S-Silicone E-EPDM N-NBR V-Viton U-U Cup	PP= PP Cage NC= Net Cage SS=SS Cage BC=Bonding Cage GF=Glass Filled Cage NF=Nylon Filled Cage PE-PE Cage

SupFlux™-M Series Outer High Flow—Radial Pleated structure with Larger Surface

SupFlux™-M Series Outer High Flow cartridge filter is designed with ergonomic and super lock for reducing leak risk. As outside diameter 6" large surface pleated cartridge filter, It possesses excellent particle holding capacity and a high flow rate



Feature

1. Ergonomic and Super Lock Design.
2. Fewer Cartridge and Less Time to Assemble.
3. High Flow Rate and Efficiency.
4. Large Surface Area for Longer Lifespan.

Material Construction

Filter Media	PP Pleated/GF Pleated
Supporter	PP No Woven Fiber
Core	PP Cage

Specification

Length	20",40",60"
Micron Rate	1μm~20μm
Diameter -OD	152mm, 165mm

Operation Condition

Max. Pressure Drop	0.35Mpa@25℃//0.20Mpa@80℃
Max. Working Temp.	-70℃~200℃
Change-Out ΔP	0.25Mpa

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sealing	Cage
F	HF	MP	40	F	S	S	PP
F-Food&Beverage C-Chemical I-Industrial Water Treatment	HF-High Flow	PMP1-PP Norminal MP2-PP Absolute MG-Glass Fiber MHP-Radial Pleated	20-20" 40-40" 60-60"	C-0.45μm F-1.0μm H-5.0μm I-10.0μm J-20.0μm O-40.0μm P-60.0μm	S-Single Oring C-226Double Oring	S-Silicone E-EPDM N-NBR V-Viton U-U Cup	PP= PP Cage NC= Net Cage* GF=GlassFilled Cage

*Net Cage: MHP Type Only



Single Oring



226 Double Oring

SupFlux™-K Series Inner High Flow—Ideal Alternative for Parker MegaFlow

SupFlux™-K Series Inner High Flow cartridge filter is equipped with an insert O-ring to minimize the risk of leaks. Featur-ing a large 6" outside diameter and a pleated surface, it offers excellent dirt-hold-ing capacity and high flow rates



Feature

1. 100% Polypropylene, Glass Filled and SS Material.
2. Fewer Cartridge and Less Time to Assemble.
3. Handle Design Makes Quick Change.
4. Large Surface Area for Longer Lifespan.

Application

1. Sea Water Desalination
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. Power Plant

Material Construction

Filter Media	PP Pleated, GF Pleated,PP Melt Blown
Supporter	PP No Woven Fiber
Cage	PP Cage, Net Cage,SS Cage,Bonding Cage, Glass Filled Cage,Nylon Filled Cage

Operation Condition

Max. Pressure Drop	0.38Mpa@25℃//0.20Mpa@80℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa

Specification


Length	20",40",60'
Micron Rate	1μm~20μm
Diameter -OD	152mm

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sealing	Cage
C	HF	KP1	40	F	N	S	PP
F-Food&Beverage	HF-High Flow	KP1-PP Norminal	20-20"	AF-1.0μm	S-Single Oring	S-Silicone	PP= PP Cage
C-Chemical		KP2-PP Absolute	40-40"	H-5.0μm	D-Double Oring	E-EPDM	NC= Net Cage
I-Industrial Water Treatment		KG-Glass Fiber	60-60"	I-10.0μm		N-NBR	GF=Glass Filled Cage
				J-20.0μm		V-Viton	NF=Nylon Filled Cage

SupFlux™-A Series High Flow— Replace Pentair AquaLine High Flow

SupFlux™-A series High Flow cartridge filter is designed with Polypropylene media, which can replace Pentair AquaLine filter cartridge. It's an ideal for per filtration and clarification in Power plant and Desali-nation plant etc.



Feature

1. 100% Polypropylene Filter Media with PVC Hardware.
2. High Flow Filter for Fewer Change-outs and Lower Maintenance Cost.
3. Suitable for FRP Housing Flexible Installation and Assemble In Base Of Different Usage Condition.
4. High Surface Area and Efficiency Ratio Provides Higher Loading Capacity for Longer Lifespan.
5. Thermal Welding Process and Free of Any Adhesive.

Application

1. Sea Water Desalination
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. Power Plant

Material Construction

Filter Media	PP Pleated/GF Pleated
Supporter	PP No Woven Fiber
Core	PP Cage

Operation Condition

Max. Pressure Drop	0.35Mpa@25℃//0.20Mpa@80℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa


Specification

Length	20",40",60"
Micron Rate	1μm~20μm
Diameter -OD	152mm, 165mm

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sealing	Cage
F	HF	AP	40	F	D	S	N
F-Food&Beverage	HF-High Flow	AP1-PP Nornimal	20-20"	F-1.0μm	D-Double Oring	S-Silicone	NC= Net Cage
C-Chemical		AP2-PP Absolute	40-40"	H-5.0μm		E-EPDM	
I-Industrial Water Treatment		AG-Glass Fiber	60-60"	I-10.0μm		N-NBR	
				J-20.0μm		V-Viton	

SupFlux™-B HF Cartridge Filter -Maskman Style HF Cartridge Filter



SupFlux™-B series bag type high flow cartridge filter is designed with polypropylene media. As a perfect equivalent to the Pall Marksman filter cartridge, it can be installed as a bag filter in a bag filter housing. It is ideal for filtration applications in the ink and coatings, beverage, and petroleum oil industries.

Feature

1. 100% Polypropylene Filter Media.
2. High Flow Filter for Fewer Change-outs and Lower Maintenance Cost.
3. Perfectly Assembled into Bag Filter Housing.
4. High Surface Area and Efficiency Ratio Provides Higher Loading Capacity for Longer Lifespan.
5. Thermal Welding Process and Free of Any Adhesive.

Application

1. Sea Water Desalination
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. Power Plant

Material Construction

Filter Media	Polypropylene/Glass Fiber
Supporter	PP No Woven Fiber
Cage	Polypropylene

Operation Condition

Max. Pressure Drop	0.38Mpa@25℃//0.20Mpa@80℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa

Specification

Length	Size#1(450mm)/Size#2(810mm)
Micron Rate	1μm~20μm
Diameter -OD	6.0"(152mm)

Order Information

Application	Type	Material	Size	Micron	Sealing	Cage
C	HF	BP1	B1	F	S	PP
F-Food&Beverage C-Chemical I-Industrial Water Treatment	HF-High Flow	BP1-PP Norminal BP2-PP Absolute BG-Glass Fiber	B1=Bag#1 B2=Bag#2	AF-1.0μm H-5.0μm I-10.0μm J-20.0μm	S-Silicone E-EPDM N-NBR V-Viton	PP= PP Cage NC= Net Cage

SupFlux™-E Series High Flow— Replace FON Type High Flow



SupFlux™-E series High Flow cartridge filter is designed with polypropylene media, making it a suitable replacement for the FON Adaptor HF filter cartridge. It is ideal for pre-filtration and clarification in power plants, desalination plants, and other similar applications.

Feature

1. 100% Polypropylene Filter Media With PVC Hardware.
2. High Flow Filter for Fewer Change-outs and Lower Maintenance Cost.
3. Suitable for FRP Housing Flexible Installation and Assemble In Base Of Different Usage Condition.
4. High Surface Area and Efficiency Ratio Provides Higher Loading Capacity For Longer Lifespan.
5. Thermal Welding Process and Free of Any Adhesive.

Application

1. Sea Water Desalination
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. Power Plant

Material Construction

Filter Media	PP Pleated/PP Melt Blown
Supporter	PP No Woven Fiber
Core	PP Cage
Cage	No Cage/ PP Cage/ Netting Cage
Oring	Silicone, EPDM, NBR, Viton

Operation Condition

Max. Pressure Drop	0.35Mpa@25℃//0.20Mpa@80℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa

Specification


Length	40",60"
Micron Rate	1μm~20μm
Diameter -OD	145mm


Order Information

Application	Type	Material	Length	Micron	Adaptor	Sealing	Cage
F	HF	EP	40	F	D	S	NC
F-Food&Beverage C-Chemical I-Industrial Water Treatment	HF-High Flow	EP1-PP Nominal EP2-PP Absolute	20-20" 40-40" 60-60"	F-1.0μm H-5.0μm I-10.0μm J-20.0μm	D-Double Oring	S-Silicone E-EPDM N-NBR V-Viton	N—No Cage* NC-Net Cage PP-PP Cage

AquaFlux™ Series Melt Blown— 100% Polypropylene Material

AquaFlux™ Series Melt Blown cartridge filter is made from 100% polypropylene material. Its three nano fiber layers provide an absolute efficiency rate. It also has excellent dirt-holding capacity and a high flow rate, meeting both NSF and FDA requirements.



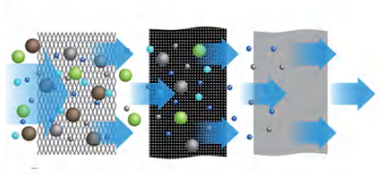


Feature

1. 100% Polypropylene Material.
2. 3 Nano Fiber Layers for Better Lifespan.
3. NSF,FDA Certificates.

Application

1. Sea Water Desalination
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. Power Plant

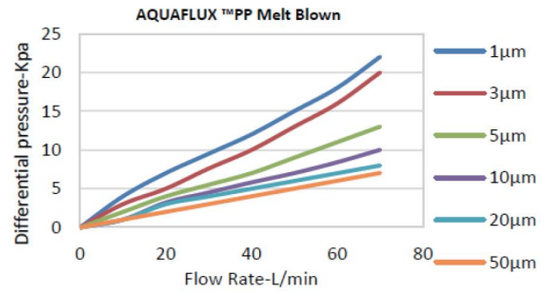

Material Construction

Filter Media	100% PP
Supporter	None / PP

Specification

Length	5"~70"
Micron Rate	1μm~150μm
Diameter -OD	63mm, 114mm, 152mm
-ID	28mm, 30mm, 114mm

Operation Condition

Max. Pressure Drop	0.40Mpa@25℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa

Order Information

Application	Type	Material	Length	Micron	Adaptor	Sealing	Cage
C	SP	P	10	C	D1	S	P
F-Food&Beverage C-Chemical I-Industrial Water Treatment	SP-General Melt Blow SPG-Grooved Melt blown SPB-Big Blue Melt Blown SPO-Orange Melt Blown SPE-Emboss Melt Blown	P-Polypropylene	5-5" 10-10" 20-20" 30-30" 40-40" 50-50" 60-60" 70-70"	C5-0.5μm F-1.0μm G-2.0μm H-5.0μm I-10.0μm J-20.0μm K-50.0μm L-100μm M-150μm	D1-DOE B1-222/Flat B3-222/Fin C1-226/Fin C3-226/Flat S-Self-seal Spring X-Extended Core	S-Silicone E-EPDM N-NBR V-Viton	P-PP core N-No Core

AquaFlux™ Series Nylon Melt Blown— Polyamide Material

AquaFlux™ Series Nylon Melt Blown cartridge filter is made from polyamide material, which provides more consistent perfor-mance than polypropylene. It offers better high-temperature resistance and superior chemical solvent capacity.



Feature

1. Perfect Chemical and anti-thermal capability Max. 125℃.
2. No Binders and Additives.
3. High Dirty Holding Capacity.
4. Meet NSF, FDA Request Material.

Application

1. Fine Chemical
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. High Temp Water

Material Construction

Filter Media	Polyamide
Supporter	None/SS

Specification

Length	5"~70"
Micron Rate	1μm~150μm
Diameter -OD	63mm
-ID	28mm

Operation Condition

Max. Pressure Drop	0.50Mpa@25℃
Max. Working Temp.	90℃
Change-Out ΔP	0.25Mpa

Order Information

Application	Type	Material	Length	Micron	Adaptor	Cage	Sealing
C	SP	N	10	C	D1	N	S
F-Food&Beverage C-Chemical I-Industrial Water Treatment	SP-General Melt Blow	N-Nylon	5-5" 10-10" 20-20" 30-30" 40-40" 50-50" 60-60" 70-70"	C5-0.5μm F-1.0μm G-2.0μm H-5.0μm I-10.0μm J-20.0μm K-50.0μm L-100μm M-150μm	D1-DOE B1-222/Flat B3-222/Fin C1-226/Fin C3-226/Flat	S-SS core N-No Core	S-Silicone E-EPDM N-NBR V-Viton

AquaFlux™ Series String Wound-- Max Wound Process to add 30% Material

AquaFlux™ Series String Wound cartridge filter is made from 100% PP string, utilizing a maximum wound process to add 30% more material for superior dirt-holding capacity. It offers wide chemical compat-ibility and features a special connector for various working conditions.





Feature

1. Max Wound Process Add 30% Weight.
2. Widely Chemical Compatibility.
3. Special Connecter for Different Work Condition.

Application

1. Sea Water Desalination
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. Power Plant

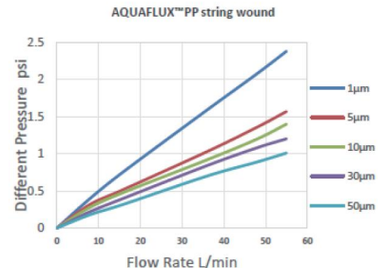

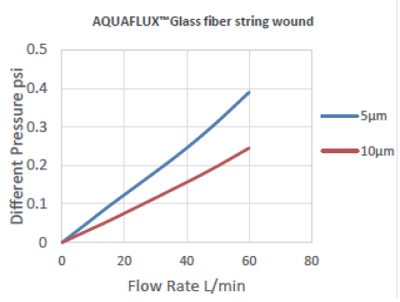

Material Construction

Filter Media	PP/Cotton/Glass Fiber
Supporter	PP/SS 304/SS 316

Operation Condition

Max. Pressure Drop	0.40Mpa@25℃
Max. Working Temp.	80℃&120℃
Change-Out ΔP	0.25Mpa
Min Buest Pressure	0.50Mpa
PH Value	4~11

Specification

Length	10"~70"
Micron Rate	1μm~150μm
Diameter -OD	63mm, 114mm
-ID	28mm

Order Information

Application	Type	Material	Length	Micron	Adaptor	Cage	Sealing
C	SW	P	10	F	D1	P	S
F-Food&Beverage	SW-General String Wound	P-Polypropylene	5-5"	F-1.0μm	D1-DOE	P-PP	S-Silicone
C-Chemical	SW1-Clean String Wound	C-Absorbent Cotton	10-10"	F2-1.2μm	B1-222/Flat	4S-304 SS	E-EPDM
I-Industrial Water Treatment	SW2-XTL String Wound	C-Absorbent Cotton	20-20"	G-2.0μm	B3-222/Fin	6S-316LSS	N-NBR
	SWB-Big Blue String Wound		30-30"	H-5.0μm	C1-226/Fin		V-Viton
			40-40"	I-10.0μm	C3-226/Flat		
			50-50"	J-20.0μm	S-Self-seal Spring		
			60-60"	K-50.0μm	X-Extended Core		
			70-70"	L-100μm			
				M-150μm			

AquaFlux™ Series Oil Filter— Absorb Oil From Wells' Water

AquaFlux™ Series Oil Pleated Cartridge Filter is made from glass fiber material with a special structure, primarily used for oil field filtration. Glass fiber performs well in absorbing oil from well water. It also offers cage and net options for different applications.



Feature

1. Glass Fiber + Polypropylene Material.
2. Good Oil Absorb Feature.
3. High Fow Rate and Dirty Holding Capacity.

Application

1. Fine Chemical
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. High Temp Water

Material Construction

Filter Media	PP/Glass Fiber
Cage	PP Cage/PET Mesh
Core	PP/SS 304/SS 316
End Cap	PP/ABS

Operation Condition

Max. Pressure Drop	0.5Mpa @25℃/0.3Mpa @65℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa

Specification

Length	20",40",60"
Micron Rate	1μm~20μm
Diameter -OD	152mm

Order Information

Application	Type	Material	Length	Micron	Adaptor	Cage	Core	Sealing
I	OF	P	10	F	D1	N	P	E
F-Food&Beverage	OF-Oil Filter	P-Polypropylene	5-5"	C5-0.5μm	D1-DOE	N- PET Mesh	P-PP core	E-EPDM
C-Chemical		G-Glass Fiber	10-10"	F-1.0μm	B1-222/Flat	C-PP Cage	4S-304 SS	N-NBR
I-Industrial Water Treatment			20-20"	H-5.0μm			6S-316LSS	V-Viton
			30-30"	I-10.0μm				
			40-40"	J-20.0μm				
				K-50.0μm				

AquaFlux™ Series Liquid Bag Filter— Polypropylene, Polyester and Nylon Mesh

AquaFlux™ Series Liquid Bag Filter is made from polypropylene, polyester, and nylon mesh materials, making it suitable for a wide range of liquid applications, including the filtration of water, edible oils, juices, sugar, dairy products, paint, and wine.



Feature

1. Widely Chemical Compatibility.
2. Large Dirty Holding Capacity.
3. Material Meet NSF and FDA Requirement.

Application

1. Sea Water Desalination
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. Power Plant

Material Construction

Filter Media	PP/PE/NMO
Supporter	1μm~150μm
Gasket	PP/SS 304/SS 316
Handle	F type H type
Size	#1, #2, #3, #4

Operation Condition

Item	Outside Dia	Length	Flux
Size #1	7″	17″	20m3/h
Size #2	7″	32″	40m3/h
Size #3	4″	9″	6m3/h
Size #4	4″	15″	12m3/h

Order Information

Application	Type	Material	Size	Micron	Cage	Sealing
C	BF	PO	01	F	P	1
F-Food&Beverage C-Chemical I-Industrial Water Treatment	BF-Bag Filter	PO-Polypropylene PE-Polyester NMO-Nylon Mesh	01-Bag Szie#01 02-Bag Szie#02 03-Bag Szie#03 04-Bag Szie#04	F-1.0μm H-5.0μm I-10.0μm J-20.0μm K-50.0μm L-100μm M-150μm	P-PP 4S-304 SS 6S-316LSS	1-F Type 2-H Type 3-L Type



AquaFlux™ Series Ultraglas-A Filter— Superior Resin Bonded

AQUAFLUX™ Series Ultrglas-A Filter Cartridge Filter are designed using various resin fiber sizes and controlled gradient densities for different micron ratings, lower replacement cycles, optimal filtration efficiencies, and consistent performance across production runs. Other design features include a grooved surface that offers increased effective surface area and dirt-holding capacity, and an ungrooved surface that provides excellent gel-type contaminant removal. All of our cartridges are available with or without center cores. These cores enable our cartridges to withstand differential pressures ranging from 50 psi to 150 psi.



Feature

1. Broadest Chemical Compatibility.
2. Highest Operating Temperature.
3. Option of Metal, Plastic or No Core.
4. Range of 50psi to150psi Different Pressure.
5. Efficiency Rating from 0.5um to 175um.
6. Available with Optional End Treatments.
7. Broadest Range of Applications.
8. Low Different Pressure & Extended Cartridge Life.

Application

1. Fine Chemical
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. High Temp Water

Operation Condition

Max. Operation temperature	150°C	
Change-Out Pressure Drop	35psi	
Feed Water Pressure	No Core	45 psi
	Plastic Core	70psi
	Tin Plate Core	150psi
	Stainless Steel Core	100psi

Order Information

Application	Type	Length	Micron	Adaptor	Core
I	RB	10	F	O	P
F-Food&Beverage C-Chemical I-Industrial Water Treatment	RB-General Resin Bonded	03-3″ 05-4.75″ 06-6″ 09A-9.5″ 09B-9.75″ 10-10″ 195-19.5″ 20-20″ 295-29.5″ 30-30″ 40-40″	C5-0.5um F-1.0um G3-3.0um H-5.0um I-10.0um J5-25.0um K-50.0um K5-75.0um L5-125um	O-Cut DOE	N-No Core P-Plastic core M-Metal Core S-SS Core

AquaFlux™ Series PBT Filter-- Benzene etc. Aromatic Hydrocarbons Solvent

AquaFlux™ Series PBT pleated cartridge filter are primarily designed for acid chemicals and the petrochemical industry. They effectively filter aromatic hydrocarbon solvents like benzene and methylbenzene. Additionally, they exhibit excellent performance under high temperatures and high pressure drops, ensuring a longer lifespan compared to general PP media filters.



Feature

1. 100% PBT Material for Benzene, Methylbenzene etc. Aromatic Hydrocarbons Solvent.
2. 98% Absolute Efficiency Meet Various Application Requirement.
3. Higher 120℃ Temperature and Higher 4.2bar Pressure Drop.
4. Thermal Welding Process and Free of Any Adhesive.

Application

1. Fine Chemical
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. High Temp Water

Material Construction

Filter Media	PBT
Supporter	PBT
Core	PBT

Operation Condition

Max. Pressure Drop	0.42Mpa@25℃/0.25Mpa@75℃
Max. Working Temp.	120℃
Change-Out ΔP	0.25Mpa

Specification

Length	10"~40"
Micron Rate	0.1μm~10μm
Diameter -OD	69mm

Order Information

Application	Type	Material	Length	Micron	Adaptor	Core	Sealing
C	PF	PBT	10	F	D1	T	S
F-Food&Beverage C-Chemical I-Industrial	PF-Pleated Filter	PBT-PBT Pleated	10-10" 20-20" 30-30" 40-40"	A-0.1μm B-0.2μm B2-0.22μm C-0.45μm D-0.65μm E-0.8μm F-1.0μm G-2.0μm H-5.0μm I-10.0μm	D1-DOE B1-222/Flat B3-222/Fin C1-226/Fin C3-226/Flat	T-PBT core 4S-304 SS 6S-316LSS	S-Silicone E-EPDM N-NBR V-Viton F-PTFE EV-Encapsuled Viton ES-Encapsuled Silicone

AquaFlux™ Series Ultraglas-A Filter— Superior Resin Bonded

AquaFlux™ Series multi layers PP pleated cartridge filter utilizes over 5 layers of depth media and PP membrane with PP hardware. It offers a larger dirt-holding capacity and filtration area. The graded pore size structure of the filter cartridge provides different channels for remov-ing particles, contributing to a longer lifespan.



Feature

1. 100% All Polypropylene Material for Excellent Chemical Compatibility.
2. 98% Absolute Efficiency Meet Various Application Requirement.
3. More Than 5 Layers Multi-media Filtration Construction, Longer Service Life.
4. Thermal Welding Process and Free of Any Adhesive.
5. Larger Surface Area, Resulting In Low Clean Δp and Higher Dirty Holding Capacity.

Application

1. Fine Chemical
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. High Temp Water

Material Construction

Filter Media	Multi PP
Supporter	PP Mesh and/PP No Woven Fiber
Core	PP/SS 304/SS 316

Operation Condition

Max. Pressure Drop	0.38Mpa@25℃/0.25Mpa@75℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa
Sterilization	20times Autoclave @121℃ 30mins

Specification

Length	10"~40"
Micron Rate	0.1μm~10μm
Diameter -OD	65/69/83/114mm

Order Information


Application	Type	Material	Length	Micron	Adaptor	Core	Sealing
C	PF	MP	10	F	D1	P	S
M-BioPharma F-Food&Beverage C-Chemical I-Industrial Water Treatment	PF-Pleated Filter	MP-Multi Layers PP MPB-Multi Layers PP Big Blue	10-10" 20-20" 30-30" 40-40"	A-0.1μm B-0.2μm C-0.45μm D-0.65μm E-0.8μm F-1.0μm G-2.0μm H-5.0μm I-10.0μm	D1-DOE B1-222/Flat B3-222/Fin C1-226/Fin C3-226/Flat	P-PP core 4S-304 SS 6S-316LSS	S-Silicone E-EPDM N-NBR V-Viton F-PTFE EV-Encapsuled Viton ES-Encapsuled Silicon

SteelFlux™ Series Sanitary Housing—Gas/Venting Sanitary Housing

Feature



1. Material:SS304, SS316L.
2. Connection; Quick Connection Flange.
3. Surface Polishing: Mirror and Sandy Surface.
4. Adaptor: 222/226/DOE.

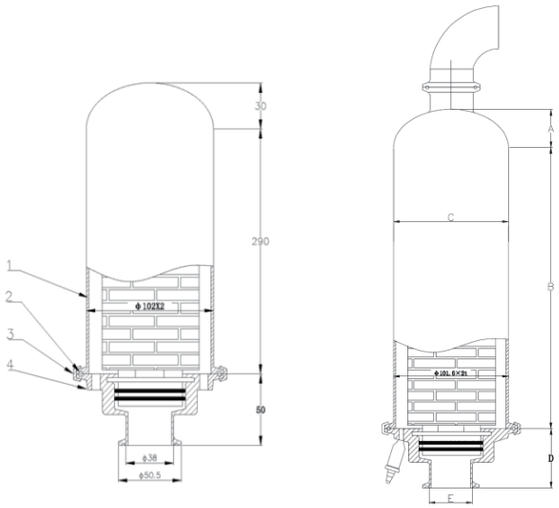

Order Information

Application	Type	Material	Filter Rounds	Length	Connection	Polishing	Adaptor
F	GSH	S	010	10	Q	M	2
M-BioPharma	GSH-Gas Housing	S-SS304	010-1 Round	10-10"	Q-TC QuickConnect	M-Mirror Surface	2-222
F-Food&Beverage	VSH-Venting Housing	SS-SS316L	030-3 Rounds	20-20"	F-Flange		6-226
C-Chemical			050-5 Rounds	30-30"			O-DOE
I-Industrial Water Treatment			070-7 Rounds	40-40"			
			090-9 Rounds				
			120-12 Rounds				

AquaFlux™ Series Impregnated Carbon- - Ideal For Pre Filtration

Impregnated carbon cartridge filter combines the performance of depth filtration with the absorption capabilities of activated carbon. It is ideal for pre-filtration and clarification in various applications.



Feature

1. Excellent Impregnated Active Carbon Filter Media for Absorb Smell, Odor, Pigement, VOC and Organic Substance.
2. Different Filtration Ratings to Meet Various Application Requirement.
3. Step Deep Filtration Construction, Longer Service Life, Lower Cost.
4. Thermal Welding Process and Free of Any Adhesive.
5. No Release of Hazardous Substances.

Application

1. Fine Chemical
2. Amine
3. Petro Chemical
4. Solvent Bsed
5. Paints & Coatings
6. High Temp Water

Material Construction

Filter Media	Impreganted Carbon
Supporter	No Woven Fiber
Core	PP/SS 304/SS 316

Operation Condition

Max. Pressure Drop	0.35Mpa@25℃/0.20Mpa@75℃
Max. Working Temp.	80℃
Change-Out ΔP	0.25Mpa

Specification

Length	5"~50"
Micron Rate	0.1μm~10μm
Diameter -OD	65/ 6/ 83/ 114mm

Order Information

Application	Type	Material	Length	Micron	Adaptor	Core	Sealing
C	RF	IC	10	F	D1	T	S
F-Food&Beverage	RF-Rolled Filter	IC-Impregnated Carbon	5=5"	F-1.0μm	O-DOE	P-PP core	S-Silicone
C-Chemical		P-Polypropylene	10-10"	G3-3.0μm	2F-222/Fin	4S-304 SS	E-EPDM
I-Industrial Water Treatment			20-20"	H-5.0μm	2T-222/Flat	6S-316LSS	N-NBR
			30-30"	I-10.0μm	6F-226/Fin		V-Viton
			40-40"		6T-226/Flat		F-PTFE
			50-50"				

SteelFlux™ Series Membrane Housing— Liquid Sanitary Disc Housing



SteelFlux™ Series Liquid Sanitary Disc Holder includes designs for both general pressure and high pressure applica-tions, offering excellent performance and ease of installation. It is effective in both forward and backward pressure processes, making it widely used for small-volume purification, sterile, or protein filtration.

Feature

1. Material:SS304, SS316L.
2. Connection; Quick Connection Flange.
3. Surface Polishing: Mirror and Sandy Surface.
4. Adaptor: 222/226/DOE.

Application

1. Fine Chemical
2. Amine
3. Petro Chemical
4. Solvent Based
5. Paints & Coatings
6. High Temp Water



Specification

Diameter	400mm,350mm,300mm,250mm,200mm,150mm,100mm
Material	SS304, SS316L
Connection	Tri-Clamp, Hose Barb

Operation Condition

Max. Pressure Drop	0.20Mpa@25℃
Max. Working Temp.	100℃
Sterilization	20times Autoclave @121℃ 30mins


Order Information

Application	Type	Material	Filter Rounds	Diameter	Connection	Polishing
F	LSDH	S	010	A	Q	M
M-BioPharma F-Food&Beverage C-Chemical	LSDH-Liquid Sanitary Disc Holder	S-SS304 SS-SS316L	010-1 Round	A-400mm B-350mm C-300mm D-250mm E-200mm F-150mm G-100mm	Q-TC QuickConnect F-Flange	M-Mirror Surface

SteelFlux™ Series Sanitary Housing—Liquid Sanitary Housing


Feature

1. Material:SS304, SS316L.
2. Connection; Quick Connection Flange.
3. Surface Polishing: Mirror and Sandy surface.
4. Adaptor: 222/226/DOE.

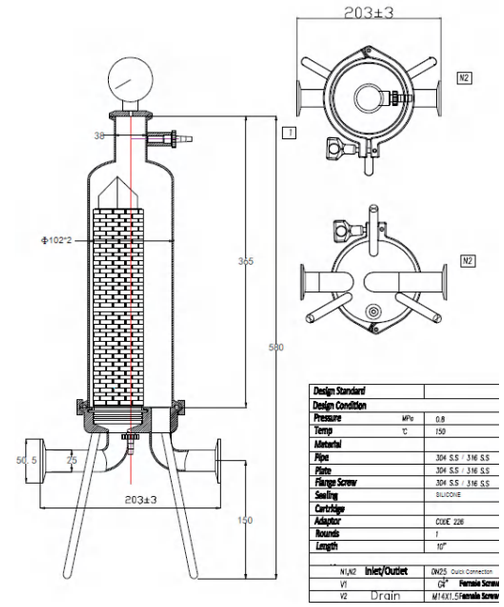







Order Information

Application	Type	Material	Filter Rounds	Length	Connection	Polishing	Adaptor
F	LSH	S	010	10	Q	M	2
M-BioPharma F-Food&Beverage C-Chemical I-Industrial	LSH-Liquid Sanitary Housing	S-SS304 SS-SS316L	010-1 Round 030-3 Rounds 050-5 Rounds 070-7 Rounds 090-9 Rounds 120-12 Rounds	10-10" 20-20" 30-30" 40-40"	Q-TC QuickConnect F-Flange H-5.0μm I-10.0μm	M-Mirror Surface	2-222 6-226 0-DOE

SteelFlux™ Series Sanitary Housing—Gas/Venting Sanitary Housing with Heater Jacket

Size	Height	ID	Volt	Power	Screen Type	Fasten Method
2.5″	135mm	60mm	220V	180W	Digital/ General	Snap/Velcro
5″	160mm	105mm	220V	300W	Digital/ General	Snap/Velcro
10″	300mm	105mm	220V	700W	Digital/ General	Snap/Velcro
20″	540mm	105mm	220V	1000VW	Digital/ General	Snap/Velcro



Specification

Length	2.5″, 5″, 10″, 20″
Product type	Digital Display type, General type;
Fasten Method	Snap, Velcro
Heating Jacket Material	Silicone/SS304/SS316L
Temperature Sensor	PT100/K Type Galvanic Couple/Thermistor’
Voltage	220V, 50Hz
Temperature range	0~150℃
Protection level	IP 65

Order Information

Application	Type	Material	Filter Rounds	Length	Connection	Polishing	Adaptor	Heater
F M-BioPharma F-Food&Beverage	GSH GSH-Gas Housing VSH-Venting Housing	S S-SS304 SS-SS316L	010 010-1 Round	10 02-2.5″ 05-5″ 10-10″ 20-20″	Q Q-TC QuickConnect F-Flange	M M-Mirror Surface	2 2-222 6-226 0-DOE	HJ HJ-Heater Jacket

SteelFlux™ Series Lenticular Filter Housing—Liquid Sanitary Housing

SteelFlux™ Series Lenticular Filter Housing is widely used in chemical, pharmaceutical, and food and beverage applications, suitable for deep filtration and modular closed systems. The lenticular filter system is as versatile as filter sheets in plate & frame filters but offers sanitary operation, ease of use, and minimal product loss and air exposure during change-outs. It is particularly well-suited for smaller to medium volume flows.







Feature

1. Material:SS304, SS316L.
2. Connection; Quick Connection Flange.
3. Surface Polishing: Mirror and Sandy Surface.
4. Adaptor: 222/226/DOE.

Application

1. Fine Chemical
2. Food and Beverage
3. Pharmaceutical
4. Digital Ink
5. Organic Solvent
6. Industrial Water Treatment

Material Construction

Body	SS 304/SS 316
Rounds	1stack, 2stacks, 3stacks, 4stacks
Sealing	EPDM
InLet/OutLet	Quick Connection
Filter Type	12″16″
Max. Working Pressure	0.6Mpa @25℃
Max. Working Temp.	150℃
Online Stream	121℃ 30mins

Order Information


Application	Type	Material	Rounds	DFilter Type	Length	Connection	Polishing	Adaptor
F M-BioPharma F-Food&Beverage C-Chemical	LLH LLH-Liquid Lenticular Housing	S S-SS304 SS-SS316L	1 1-1 Stack 2-2 Stacks 3-3 Stacks 4-4 Stacks	A A=12″ B=16″	10 10-10″ 20-20″ 30-30″ 40-40″	Q Q-TC Quick Connect	M M-Mirror Surface	0 0-DOE 2-SOE


SteelFlux™ Series Security Filter Housing— PVC, FRP,CS and SS material

Feature

1. Material:SS304, SS316L.
2. Connection; Quick Connection Flange.
3. Surface Polishing: Mirror and Sandy Surface.
4. Adaptor: 222/226/DOE.



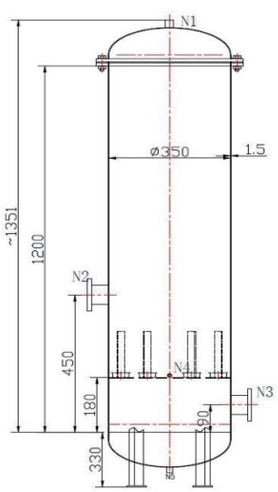

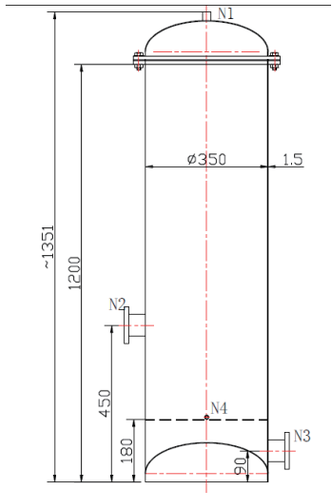

Order Information


Application	Type	Material	Filter Rounds	Length	Connection	Polishing	Adaptor
C	SFH	S	010	10	S	M	2
M-BioPharma F-Food&Beverage	SFH-Security Filter Housing	S-SS304 SS-SS316L GS-Glass Steel CS-Carbon Steel	010-1 Round 030-3 Rounds 050-5 Rounds 070-7 Rounds 090-9 Rounds 120-12 Rounds	10-10" 20-20" 30-30" 40-40"	S-Screw F-Flange	M-Mirror Surface S- Sub Light	2-222 Adaptor 6-226 Adaptor 0-DOE Adaptor

SteelFlux™ Series Membrane Housing— Liquid Sanitary Disc Housing

Feature

1. Most reliable Sealing Design.
2. Easy to Clean and Change Out.
3. 6 Bar Operation Pressure and 120 ℃ Temp.
4. Standard Bag Filter #01,#02, #03 and #04.



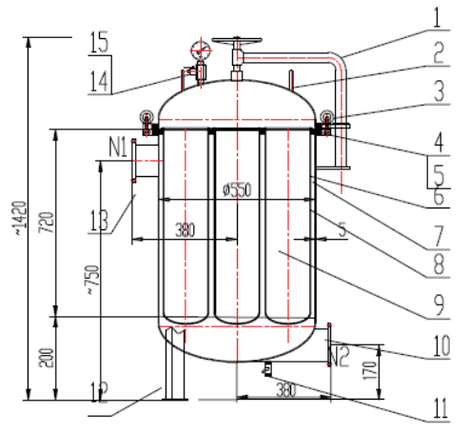

Order Information


Application	Type	Material	Filter Rounds	Bag Size	Connection	Polishing
F	LBF	S	010	BF1	Q	M
F-Food&Beverage C-Chemical I-Industrial Water Treatment	LBF-Liquid Bag Filter Housing	S-SS304 SS-SS316L	010-1 Round 030-3 Rounds 050-5 Rounds 070-7 Rounds 090-9 Rounds 120-12 Rounds	BF1-#01 BF2-#02 BF3-#03 BF4-#04	Q-TC QuickConnect F-Flange	M-Mirror Surface S- Sub Light

SteelFlux™ Series Security Filter Housing— PVC, FRP,CS and SS material



Feature

1. Material: Glass Steel.
2. Connection; Quick Connection Flange.
3. Surface Polishing: Mirror and Sandy Surface.

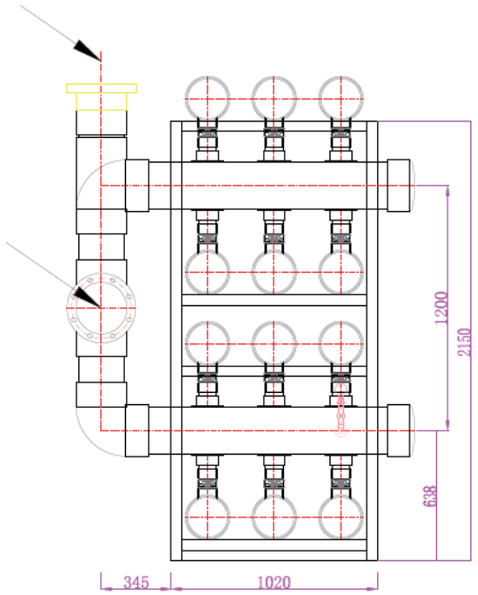

Order Information

Application	Type	Material	Filter Rounds	Length	Connection
C	SFH	S	010	10	F
M-BioPharma F-Food&Beverage I-Industrial Water Treatment	HFH-High Flow Filter Housing	GS-Glass Steel	010-1 Round 030-3 Rounds 050-5 Rounds 070-7 Rounds 090-9 Rounds 120-12 Rounds	10-10″ 20-20″ 30-30″ 40-40″	F-Flange

SteelFlux™ Series Membrane Housing— Liquid Sanitary Disc Housing


Feature

1. Material:SS304, SS316L.
2. Connection; Quick Connection Flange.
3. Surface Polishing: Mirror and Sandy Surface.
4. Adaptor: Pall, Parker etc.



Specification

Design Pressure	10bar
Test Pressure	15bar
Working Medium	Water
Design Temperature	120℃
Working Temperature	25℃

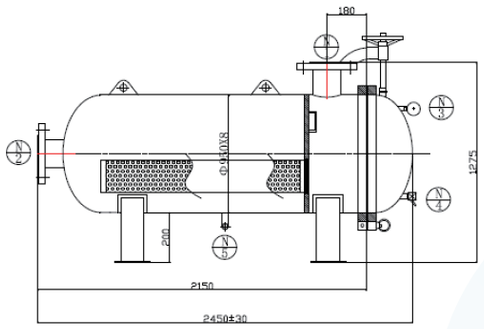

Order Information

Application	Part#	Material	Filter Rounds	Length	Connection	Polishing
F	HFH	S	010	20	Q	M
F-Food&Beverage C-Chemical I-Industrial Water Treatment	HFH-High Flow Filter Housing	CS-Carbon Steel S-SS304 SS-SS316LL	010-1 Round 030-3 Rounds 050-5 Rounds 070-7 Rounds 090-9 Rounds 120-12 Rounds	20-20″ 40-40″ 60-60″	Q-TC QuickConnect F-Flange	S- Sub Light