




Geberit Duofix element for wall-hung WC, 112 cm, with Sigma concealed cistern 12 cm

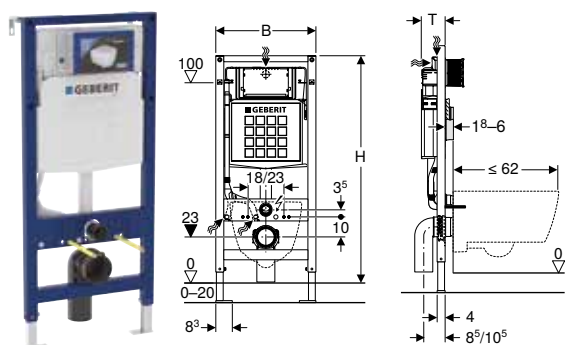

click & scan

Application purposes

- For installation in part or room-height prewall installations
- For wall-hung WCs with fastening distance 18 or 23 cm
- For single flush, dual flush or stop-and-go flush
- For floor constructions 0–20 cm

Technical data

Flow pressure	0.1–10 bar
Operating temperature, water max.	25 °C
Flush volume, factory setting	5 l / 3.5 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l

Characteristics


- Statically self-supporting frame, protected against corrosion with powder coating
- Adjustable flush volume
- Galvanized feet
- Feet adjustable 0–20 cm
- Water supply connection on the rear or top centre

Scope of delivery

- Water supply connection R 1/2", with integrated angle stop valve
- Protection box for service opening
- 2 protection plugs
- Connection set for WC, ø 90 mm
- Connection bend 90° made of PE-HD, ø 90 mm
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
224.212.00.2	50	112	12

Geberit Duofix element for wall-hung WC, 110.5 cm, with Sigma concealed cistern 12 cm, 6/4 litres

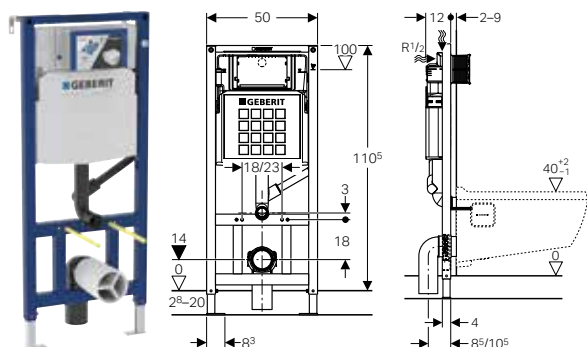

click & scan

Application purposes

- For Siphonic wall-hung WC
- For installation in part or room-height prewall installations
- For wall-hung WCs with fastening distance 18 or 23 cm
- For single flush, dual flush or stop-and-go flush
- For floor constructions 0–20 cm

Technical data

Flow pressure	0.1–10 bar
Operating temperature, water max.	25 °C
Flush volume, factory setting	6 l / 4 l
Flush volume large, adjustment range	4 l / 4.5 l / 6 l / 7.5 l
Flush volume small, adjustment range	2–4 l

Characteristics

- Statically self-supporting frame, protected against corrosion with powder coating
- Adjustable flush volume
- Galvanized feet
- Feet adjustable 0–20 cm
- Water supply connection on the rear or top centre

Scope of delivery

- Water supply connection R 1/2", with integrated angle stop valve
- Protection box for service opening
- 2 protection plugs
- Connection set for WC, ø 90 mm
- Connection bend 90° made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- 2 threaded rods M12
- Fastening material

Art. no.	B [cm]	H [cm]	T [cm]
224.035.00.1	50	110.5	12