

Real Options Approach to Valuation and Decision-making of E&P Projects Under Geological and Market Uncertainties

Wellington Nascimento^{1,3*}, Reidar Bratvold², Marco Dias¹,
Marco Pacheco¹

¹Department of Electrical Engineering, PUC-Rio, Rio de Janeiro, Brazil.

²Department of Energy Resources, UiS, Stavanger, Norway.

³Petrobras, Rio de Janeiro, Brazil.

*Corresponding author(s). E-mail(s): wellington@aluno.puc-rio.br;
Contributing authors: reidar.bratvold@uis.no; marcoagd@ele.puc-rio.br;
marco@ele.puc-rio.br;

Abstract

This paper presents an integrated framework for valuing oil and gas exploration and production (E&P) projects under geological and market uncertainties using the Real Options Approach (ROA). Building on the BDH problem, the analysis introduces enhanced managerial flexibility, allowing the options to continue, buyout, or divest to be exercised at any time during the project's lifetime. Geological uncertainty is represented through the Egg benchmark reservoir with 101 stochastic permeability realizations, while market uncertainties are modeled using the Schwartz–Smith two-factor model for oil prices and a Geometric Brownian Motion (GBM) for variable operating costs. Monte Carlo Simulation (MCS) propagates these uncertainties, and the Least Squares Monte Carlo (LSM) method determines optimal decision strategies and quantifies option values. Results indicate that expanding the exercise window for options can increase the option value by over 300% relative to the original BDH problem. The proposed methodology provides a robust and realistic decision-support tool, enabling more informed investment choices in uncertain E&P environment, combining advanced stochastic modeling with dynamic optimization techniques.

Keywords: Real options, Geological uncertainty, Price uncertainty, BDH problem, Least Squares Monte Carlo, Uncertainty analysis.

1 Introduction

Oil and gas exploration and production (E&P) is a multi-stage process that begins with the investigation of sedimentary basins to identify potential hydrocarbon reservoirs, progresses through the development and operation of production facilities, and concludes with site decommissioning after resource depletion. This sector is characterized by substantial capital requirements, with financial investments commonly measured in millions of US dollars and individual project budgets often exceeding one billion dollars. Despite facing a wide range of technical and economic risks, the industry offers significant opportunities for high returns on investment.

Investment opportunities characterized by substantial uncertainty are typically designated as high-risk within corporate portfolios. While elevated uncertainty is associated with greater downside potential, it also presents the possibility of achieving outcomes that exceed expectations. Although excluding high-risk projects may help avoid capital losses, such an approach can also eliminate the chance to invest in ventures with favorable expected values. Overlooking the impact of uncertainty in project evaluation can therefore result in portfolio choices that fail to maximize stakeholder value. As highlighted by [Begg et al. \(2002\)](#) and other authors, the conventional deterministic Discounted Cash Flow (DCF) approach does not adequately account for uncertainty, implicitly treating investment as a now-or-never proposition. This assumption neglects the inherent flexibility available to managers, who can adjust their decisions in response to information that emerges as the project progresses.

Value generation in investment projects arises from the interplay between uncertainty and managerial flexibility. The assessment of the value attributable to such flexibility, often described as option-like behavior, is commonly undertaken through Real Options Approach (ROA) techniques. In this study, we employ one of the most flexible and robust methodologies for option valuation: the Least Squares Monte Carlo (LSM) method. The analysis explicitly considers three sources of uncertainty: variable operating costs, oil price, and production rate. For modeling oil prices, the two-factor stochastic process introduced by [Schwartz and Smith \(2000\)](#) was selected, as it offers an effective balance between capturing market dynamics and maintaining interpretability for decision-makers. Variable operating costs are represented using a Geometric Brownian Motion (GBM) process. The uncertainty in the production rate will be accounted for through the multiple realizations of the permeability model of the geological benchmark Egg model. Thus, this study will focus on applying the ROA to the economic evaluation of E&P projects under geological and market uncertainties.

The remainder of the paper is organized as follows. A literature review is presented in Section 2, followed by a detailed description of the problem in Section 3. Section 4 outlines the methodology, which includes the assumption of the GBM for variable operating costs, Two-Factor model for oil prices, a geological benchmark model (Egg model), Monte Carlo Simulation (MCS) and LSM to estimate the project's value with options. The results and related discussions are presented in Section 5. Finally, Section 6 concludes the paper with suggestions for potential future research.

2 Literature Review

Theory of investment under uncertainty, as developed by [Dixit and Pindyck \(1994\)](#), provides the ROA for evaluating irreversible investment decisions in uncertain environments. In the context of E&P industry, this approach emphasizes the value of managerial flexibility in timing investments, accounting for volatility in prices, geological information, and regulatory factors. Unlike traditional DCF method, the ROA captures the strategic value of waiting and learning before committing capital.

DCF method determines the present value of each future cash flow (CF) by applying a discount rate that reflects the time value of money. Net Present Value (NPV) is then calculated as the sum of all discounted future cash flows, including both inflows and outflows. NPV method remains the primary approach for evaluating investment projects in the E&P industry, despite well-known limitations related to market assumptions, project flexibility, and discount rate selection ([Willigers et al. 2017](#)). DCF method adopts a static perspective, assuming that future decisions rely solely on the information currently available, disregarding any additional insights that may emerge at the actual decision point. This assumption overlooks managerial flexibility and the incremental value generated by the capacity to adjust decisions as the project unfolds. In light of these limitations, there is an increasing demand for alternative methodologies that enable a more rigorous and accurate assessment of investment opportunities under uncertainty. Capturing this value necessitates the application ROA.

[Trigeorgis \(1996\)](#) advances the ROA by integrating financial option pricing with strategic investment analysis, providing a comprehensive approach for valuing flexibility in corporate decision-making. In relation to E&P projects, [Trigeorgis \(1996\)](#) highlights how embedded options, such as the option to defer, expand, or abandon projects, can significantly alter investment valuation under uncertainty, particularly in capital-intensive and high-risk environments like oil and gas industry.

[Dias \(2004\)](#) presents a comprehensive overview of ROA for valuing E&P assets under market and technical uncertainty. Through intuitive examples and practical applications, the paper emphasizes the value of managerial flexibility, discussing key decisions such as drilling, appraisal, and production expansion. It also reviews classical and advanced stochastic models for oil price behavior and their implications for optimal investment strategies. [Guedes and Santos \(2016\)](#) present a detailed case study of an offshore E&P project, incorporating sequential exploration, appraisal, scaling, and abandonment options under joint geological and market uncertainty. Their findings show that traditional DCF methods underestimate project value by ignoring embedded flexibilities, particularly the option to abandon, which proved to be the most valuable under mean-reverting oil price scenarios. Complementing this, [Aliaga \(2018\)](#) integrates government incentives—such as royalty relief and price/volume-based royalty schemes—into a ROA, demonstrating that these mechanisms not only enhance the economic viability of high-risk prospects but also reduce the project’s critical investment thresholds.

There are several numerical approaches to support early-stage decision-making in oil field development under uncertainty. [Sales et al. \(2021\)](#) propose an numerical optimization-based approach incorporating Latin Hypercube Sampling and stochastic oil price model to evaluate how geological and economic uncertainties influence

key field design variables. Their results show that while early-stage designs may be conservative and suboptimal, they offer lower financial risk, and the value of perfect information is often limited. [Fedorov et al. \(2025\)](#) develop a compound ROA to assess tieback investments for marginal oil and gas fields on the Norwegian Continental Shelf, accounting for reservoir and price uncertainty. By modeling a portfolio of sequential investment decisions and incorporating updates in reservoir size and oil prices, their approach demonstrates that flexible strategies can significantly outperform static valuations, increasing returns by over 25%. These contributions emphasize the value of integrating uncertainty modeling, managerial flexibility with ROA to enhance capital allocation in upstream projects.

[Jafarizadeh and Bratvold \(2009\)](#) accentuate for a paradigm shift in petroleum investment evaluation, emphasizing the value of flexibility under uncertainty through ROA. They examine the dominance of traditional NPV methods and presents a structured comparison of ROA, including the Marketed Asset Disclaimer (MAD) and integrated frameworks. It highlights how managerial flexibilities—such as timing, expansion, and abandonment—can be systematically valued, offering strategic insight and higher project value when properly exercised. [Begg et al. \(2002\)](#) argue that conventional valuation techniques, such as DCF and Value of Information (VoI), often fail to capture the full economic potential of oil and gas investments under uncertainty. They introduce the concept of Value of Flexibility (VoF) as a complement to VoI, pointing out the strategic value of embedding flexibility in project design to manage or exploit uncertainty. Using practical examples, the authors demonstrate how flexibility in development timing, capacity scaling, and operational decisions can significantly increase project value, advocating for a shift from valuation to value creation through real options thinking. [Bickel and Bratvold \(2008\)](#) analyze the disconnect between improvements in uncertainty quantification and the lack of corresponding advances in decision quality within the oil and gas industry. Based on a survey of 494 professionals, they find that while probabilistic modeling has increased, it has not translated into better decisions, largely due to the misconception that more detailed modeling inherently improves outcomes. The authors propose a decision-focused approach emphasizing clarity, flexibility, and value-driven analysis over excessive modeling detail. They advise for iterative, decision-oriented processes and broader adoption of VoI and decision analysis techniques to truly improve decision-making effectiveness. [Chorn and Shokhor \(2006\)](#) propose a novel approach for managing risk in petroleum development by integrating ROA with dynamic programming through the Bellman equation. This mathematical union enables optimal policy development along branching, sequential investment pathways typical of oil and gas projects. Applied to a Central Asian gas condensate field, the approach demonstrates how investment flexibility, particularly in production expansion, can be systematically evaluated to support more robust decision-making under uncertainty.

[Fonseca et al. \(2017\)](#) examine the impact of oil price uncertainty on investment decisions in an African oil exploration and production project under a Risk Service Contract. By modeling oil prices with GBM and incorporating managerial flexibility through ROA with a binomial lattices, the analysis evaluates different decision scenarios. Results show that, when uncertainties are ignored, project development is not

recommended. MCS indicate a low probability of success under price volatility. However, incorporating managerial flexibility reveals that uncertainty can add value to the project, and providing the option to invest at a larger scale maximizes the asset's value.

Brandão et al. (2005a) propose a decision-analytic approach for valuing real options using binomial decision trees instead of traditional binomial lattices. This approach allows for intuitive modeling of managerial flexibility by integrating risk-neutral valuation with decision tree structures, making it suitable for problems involving multiple uncertainties and complex options. Applied to an oil production case, the method demonstrates how simulation-based volatility estimation and dynamic programming can produce flexible, transparent, and computationally practical ROA. Smith (2005) critiques the binomial decision tree method proposed by Brandão et al. (2005a) for solving real-options problems, identifying both practical and conceptual limitations. He argues for more consistent use of fully risk-neutral valuation, and recommends binomial lattices over decision trees for computational efficiency and clarity. He also highlight that estimating volatility via discounted cash flow simulations may overstate option values, and promote advanced methods, such as LSM proposed by Longstaff and Schwartz (2001) to more accurately capture project uncertainty and optimize real investment decisions.

In this paper, we aim to generalize the problem addressed by Brandão et al. (2005a), hereafter referred to as BDH problem, incorporating the methodological proposed by Smith (2005) and with the addition of more flexibility to the problem. While the original analysis focuses on exercising flexibility at a particular year, namely Year 5, we extend the ROA to allow for managerial flexibility throughout the entire production period of the oil project. By doing so, we demonstrate that greater flexibility leads to higher project value, consistent with findings in the Begg et al. (2002). Additionally, uncertainties will be incorporated into the geological model, thereby introducing variability in the production curve, thus aligning the problem more closely with real projects scenarios. The next section provides a detailed description of the problem setup.

3 Problem Description

BDH problem, addressed in Brandão et al. (2005a), involves the evaluation of an oil production project using ROA. They illustrate the application of a binomial decision tree approach to this problem. The project comprises an estimated reserve of 90 million barrels, with an initial production of 9 million barrels per year that declines at a rate of 15% annually over a 10-year horizon. Variable operating costs start at \$10 per barrel and increase by 2% per year, while oil prices begin at \$25 per barrel and grow at 3% annually. A fixed annual cost of \$5 million is also included. The analysis uses a 10% risk-adjusted discount rate and a 5% risk-free rate. These data and the resulting base case cash flows are summarized in Table 1.

Expected cash flows are first calculated using DCF methods, resulting in a base-case project value of \$404 million. MCS is then performed, incorporating uncertainties

Table 1: Base Case Expected Cash Flows for the Project

Year	0	1	2	3	4	5	6	7	8	9	10
Remaining Reserves	90.0	90.0	81.0	73.4	66.8	61.3	56.6	52.6	49.2	46.3	43.9
Production Level		9.0	7.7	6.5	5.5	4.7	4.0	3.4	2.9	2.5	2.1
Variable Op Cost Rate	10.0	10.2	10.4	10.6	10.8	11.0	11.3	11.5	11.7	12.0	12.2
Oil Price	25.0	25.8	26.5	27.3	28.1	29.0	29.9	30.7	31.7	32.6	33.6
Revenues		231.8	202.9	177.6	155.5	136.2	119.2	104.4	91.4	80.0	70.0
Production Cost		(96.8)	(84.6)	(74.0)	(64.8)	(56.9)	(50.0)	(44.0)	(38.8)	(34.3)	(30.4)
Cash Flow		135.0	118.3	103.6	90.7	79.3	69.2	60.4	52.6	45.7	39.6
Profit Sharing		(33.7)	(29.6)	(25.9)	(22.7)	(19.8)	(17.3)	(15.1)	(13.1)	(11.4)	(9.9)
Net Cash Flows		101.2	88.7	77.7	68.0	59.5	51.9	45.3	39.4	34.3	29.7
PV of Cash Flows	404.0	444.5	377.6	317.7	264.0	215.6	171.7	131.8	95.1	61.3	29.7
Cash Flow Ratios		0.228	0.235	0.245	0.258	0.276	0.302	0.344	0.414	0.559	1.000

Source: Adapted from [Brandão et al. \(2005a\)](#).

in oil prices and operating costs, both modeled as GBM. This yields an estimated project return volatility of 46.6%, which is used to build the binomial decision tree.

Decision tree framework enables the modeling of managerial flexibility through ROA. For example, the firm may divest the project in Year 5 for \$100 million or buy out a partner's 25% share for \$40 million. These options increase the project value to \$444.9 million. The model also allows for the incorporation of private risks, such as uncertainty related to water breakthrough in the reservoir, and the impact of managerial risk aversion through the use of utility functions ([Brandão et al. 2005a](#)). This example demonstrates the practical applicability and flexibility of the BDH problem in capturing both market and private risks, as well as the value of strategic decision-making under uncertainty.

BDH problem is revisited in [Smith \(2005\)](#) under a fully risk-neutral valuation approach. In this version of the problem, oil prices are treated as market risks and are assumed to follow a risk-neutral growth rate of 0% per year. Variable operating costs, on the other hand, are assumed to be private risks, uncorrelated with market variables, and follow their actual process. Assuming the decision maker is risk neutral, the integrated valuation procedure combines the risk-neutral process for market risks with the true process for private risks. This setup results in the same valuation as that produced by the equilibrium approach, meaning both lead to an identical fully risk-neutral valuation model. The input parameters and resulting cash flows for this formulation are detailed in [Table 2](#).

Using this approach, the value of the investment is simply the expected NPV, calculated using the risk-neutral valuation and discounted at the risk-free rate of 5% per year. For projects without options, a deterministic model, such as one based on expected values of oil prices and costs, can be used to compute NPV. In this case, the oil production example leads to an NPV of \$392 million under the risk-neutral

Table 2: A Risk-Neutral Version of BDH’s Base Case Analysis

Year	0	1	2	3	4	5	6	7	8	9	10
Production Level		9.0	7.7	6.5	5.5	4.7	4.0	3.4	2.9	2.5	2.1
Variable Op Cost Rate	10.0	10.2	10.4	10.6	10.8	11.0	11.3	11.5	11.7	12.0	12.2
Oil Price	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
Revenues		225.0	191.3	162.6	138.2	117.5	99.8	84.9	72.1	61.3	52.1
Production Cost		(96.8)	(84.6)	(74.0)	(64.8)	(56.9)	(50.0)	(44.0)	(38.8)	(34.3)	(30.4)
Cash Flow		128.2	106.7	88.6	73.4	60.6	49.9	40.9	33.3	27.0	21.7
Profit Sharing		(32.1)	(26.7)	(22.1)	(18.3)	(15.1)	(12.5)	(10.2)	(8.3)	(6.8)	(5.4)
Net Cash Flows		96.2	80.0	66.4	55.0	45.4	37.4	30.7	25.0	20.3	16.3
PV of Cash Flows	392.0	411.6	331.2	263.8	207.3	159.9	120.6	86.9	59.0	35.8	16.3
Cash Flow Ratios		0.233	0.241	0.251	0.265	0.284	0.311	0.352	0.423	0.566	1.000

Source: Adapted from [Smith \(2005\)](#).

approach ([Smith 2005](#)), as compared to \$404 million from the risk-adjusted DCF analysis of [Brandão et al. \(2005a\)](#).

The discrepancy between the two NPV stems from fundamental differences in how future revenues and costs are valued. In the traditional DCF approach used by [Brandão et al. \(2005a\)](#), oil prices are assumed to grow at 3% annually and are discounted at a 10% risk-adjusted rate, resulting in a net annual decline in the present value of future revenues by 7%. In contrast, the risk-neutral approach assumes no growth in oil prices and applies a lower, risk-free discount rate of 5%, leading to a slower decline in present value—only 5% per year. This implies that the risk-neutral method assigns relatively greater weight to future oil revenues. However, because future operating costs are not risk-adjusted and are also discounted at the lower risk-free rate, their present value increases under the risk-neutral approach. In this specific example, the effect of higher-valued future costs outweighs the benefit of more highly valued revenues, leading to a lower overall NPV. Nevertheless, in other situations, such as E&P projects where most of the production occurs farther into the future, the increased emphasis on long-term revenues could dominate, potentially resulting in a higher valuation using the risk-neutral approach.

[Smith \(2005\)](#) discusses how to determine an optimal exercise policy for ROA by evaluating the expected continuation value of each available alternative at each decision point, conditioned on the information available at that time. The continuation value represents the expected NPV of future cash flows if a specific decision is made. The optimal policy is the one that selects the alternative with the highest continuation value given the current state. To implement this in practice, [Smith \(2005\)](#) adopts the LSM approach proposed by [Longstaff and Schwartz \(2001\)](#), which estimates continuation values through regression analysis based on simulation results.

In the context BDH problem, this method involves simulating the project under the assumption that no options are exercised, for example, continuing operations without

divesting or buying out a partner. At the decision point in Year 5, for each simulation run, the NPV of the remaining cash flows (e.g., the realized continuation value) is recorded along with the oil price and variable operating cost in that scenario. A regression is then performed with the continuation value as the dependent variable and the state variables (oil price and cost) as independent variables. Using the fully risk-neutral approach, [Smith \(2005\)](#) conducts a simulation with 10,000 trials and obtains an estimated regression equation that expresses the continuation value as a function of the observed state variables at the time of the decision. This equation can then be used to support near-optimal decision-making by comparing the estimated continuation value with the value of exercising the option, choosing the alternative with the highest expected value.

In [Ahmadi and Bratvold \(2023\)](#), the authors analyze the LSM method for ROA, emphasizing the importance of regression function selection and path inclusion strategies. They demonstrate that excluding out-of-the-money paths can undervalue options, while higher-order polynomial regressions show robustness in only in-the-money/out-of-the-money cases. Notably, [Smith \(2005\)](#), who applied LSM to the BDH problem, used all simulated paths and a polynomial regression function, reinforcing the method’s reliability when capturing full flexibility. He highlights LSM’s effectiveness in sequential decision-making under uncertainty.

Another interesting result was obtained by [Thomas and Bratvold \(2015\)](#), who developed an approach to determine the optimal timing for gas cap blowdown by explicitly modeling key sources of uncertainty and applying ROA in combination with the LSM method. The approach incorporates uncertainties in oil and gas prices, modeled using a two-factor model prices ([Schwartz and Smith 2000](#)) calibrated via Kalman filtering, as well as uncertainties related to reserves, variable operating costs, and transition costs. This integration enables flexible and adaptive decision-making over time and produces strategy maps that identify the most value-maximizing actions under a wide range of market and reservoir conditions.

Based on the previously described BDH problem, we propose a revised formulation that enhances generality and realism through improved treatment of key parameters:

- **Production rate:** uncertainty in the production profile will be incorporated by employing the Egg model, Figure 1, a synthetic reservoir model comprising one deterministic and 100 stochastic permeability realizations, totaling 101 equiprobable scenarios ([Jansen et al. 2014](#)) and thereby capturing geological uncertainties;
- **Variable operational cost:** this parameter will be modeled as a stochastic process following a GBM, similar to the approaches in [Al-Harthy \(2007\)](#), [Xu et al. \(2012\)](#) and [Fedorov et al. \(2021\)](#);
- **Oil price:** the oil price dynamics will be captured using the two-factor model proposed by [Schwartz and Smith \(2000\)](#).

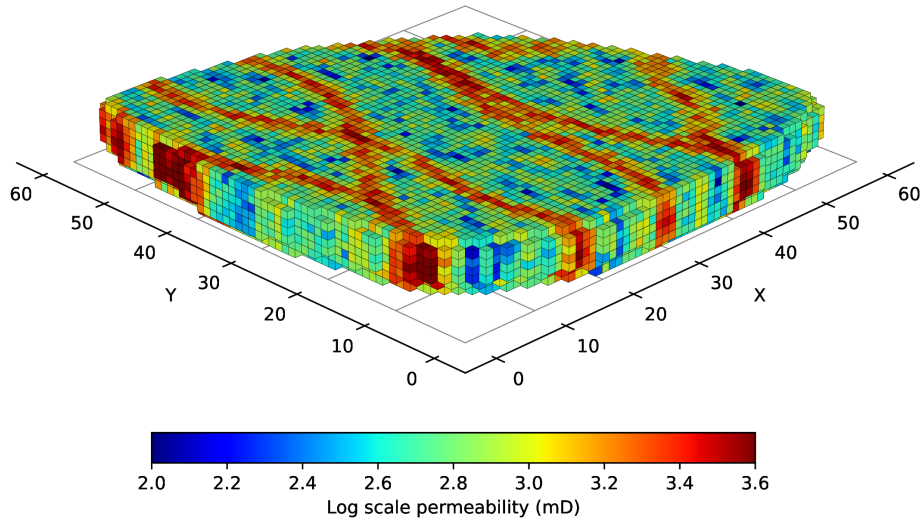


Fig. 1: 3D Egg model: permeability distribution of the deterministic version.

The available decision options remain as specified by [Brandão et al. \(2005a\)](#): *buy out partner*, *continue with current share*, or *divest*. However, instead of restricting the exercise of these options to Year 5, we introduce greater flexibility by allowing them to be exercised at any time throughout the production period of the field. Furthermore, geological uncertainty is now explicitly accounted for in the decision-making process.

4 Methodology

The methodology adopted in this work integrates state-of-the-art techniques for quantifying and managing uncertainty in oil field project valuation. Geological uncertainties are explicitly accounted for by utilizing the Egg model, a widely used synthetic reservoir benchmark that allows for the generation of multiple reservoir realizations. These realizations form the basis for stochastic simulation of oil production profiles. To propagate the impact of these uncertainties throughout the economic evaluation, we employ MCS, a robust framework frequently used in the petroleum industry for uncertainty quantification.

In addition to reservoir uncertainty, we address operational and economic uncertainties by modeling the variable operating costs as a GBM and the oil price dynamics using the two-factor model proposed by [Schwartz and Smith \(2000\)](#). Cash flow modeling is performed by integrating the simulated production, cost, and price paths, as outlined in Figure 2. The valuation of managerial flexibility and optimal decision timing is carried out through the LSM approach, which enables the application of ROA. Our analysis is anchored on the BDH problem ([Brandão et al. 2005a](#)), serving as

a basis to combine and draw insights from all these advanced modeling techniques, thus providing a comprehensive assessment of project value under uncertainty. In this paper, we use an ensemble of 101 realizations of the Egg benchmark reservoir model to estimate the possible outcomes of the oil production. In the following subsections, we present a detailed description of each component employed in this study.

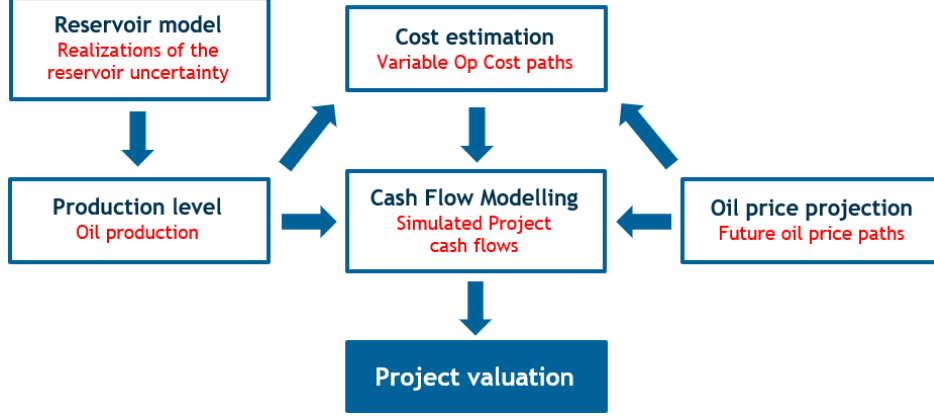


Fig. 2: The valuation procedure. Adapted from [Fedorov et al. \(2022\)](#).

4.1 The Egg Model

Egg Model, originally introduced by [Van Essen et al. \(2009\)](#) and further standardized by [Jansen et al. \(2014\)](#), is a widely used synthetic benchmark for reservoir simulation studies. The model comprises 25,200 gridblocks, of which 18,533 are active, forming an egg-shaped reservoir by excluding inactive gridblocks. Each gridblock is 8 by 8m with a height of 4m. The model consists of 8 injectors and 4 producers (see Figure 3). Its reservoir architecture features a set of meandering, high-permeability channels embedded within a low-permeability matrix, thereby representing the geological complexity of fluvial depositional environments with seven vertical layers. Due to the high degree of vertical correlation among the seven layers, the permeability fields can be considered almost two dimensional. The standard configuration comprises twelve wells, with eight injectors and four producers. Figure 3 presents the absolute permeability field and the locations of all wells. This benchmark geological model is well documented in the literature.

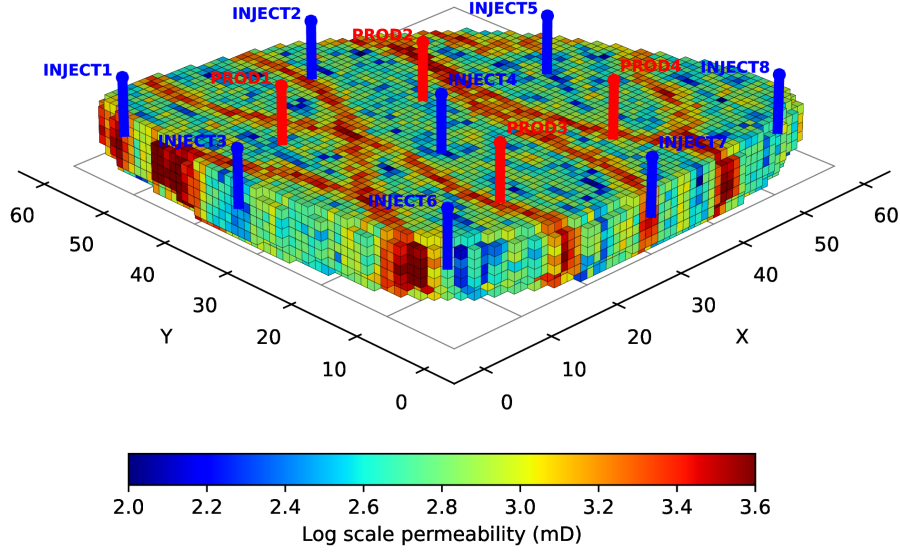


Fig. 3: 3D Egg model. Blue lines are an indicator of injector wells, and red ones represent the producers.

A distinctive feature of the Egg Model is the absence of both an aquifer and a gas cap, resulting in negligible primary production and making waterflooding the dominant recovery mechanism. The model has been constructed as an ensemble of 101 three-dimensional realizations, each with unique, hand-drawn permeability fields. This stochastic approach enables the evaluation of algorithms under geological uncertainty, providing a robust test bed for methods related to reservoir simulation, production optimization, history matching, and closed-loop reservoir management.


The dataset—including input files for various simulators and 100 additional permeability realizations—is publicly available to facilitate research and comparison of advanced reservoir management strategies. Details of the geological, fluid, and operational properties employed in this study are summarized in Table 3. Notably, the Corey model is adopted for calculating the oil and water relative permeabilities, with specific Corey exponents and endpoint values listed accordingly.

Oil and water production profiles of the deterministic version (reference model) over a simulation period of 3600 days (10 years) are illustrated in Figure 4. During the initial production phase, no water production is observed, since the initial water saturation is set to 0.1, which is equal to the irreducible (connate) water saturation. After the onset of water production, the oil production rate exhibits a sharp decline, indicating the occurrence of water breakthrough. The breakthrough time varies among the production wells, highlighting the reservoir’s heterogeneity. Therefore, the reliable prediction of water breakthrough times for each production well is essential for effective reservoir management and production optimization.

Table 3: Reservoir and fluid properties for the Egg model.

Property	Value	Unit
Dimensions	$60 \times 60 \times 7 = 25200$	–
Cell dimensions size	$8(x) \times 8(y) \times 4(z)$	m
The maximum water injection rate	79.5	m ³ /day
Production well bottom-hole pressure	39.5×10^6	Pa
Corey exponent for oil	4	–
Corey exponent for water	3	–
Connate water saturation	20	%
Initial water saturation	10	%
Residual oil saturation	10	%
Endpoint relative permeability to oil	0.8	–
Endpoint relative permeability to water	0.75	–
Capillary pressure	0	Pa
Porosity	0.2	–
Reservoir pressure	40×10^6	Pa
Oil compressibility	1.0×10^{-10}	Pa ⁻¹
Water compressibility	1.0×10^{-10}	Pa ⁻¹
Rock compressibility	0	Pa ⁻¹
Oil viscosity	5.0×10^{-3}	Pa·s
Water viscosity	5.0×10^{-3}	Pa·s
Simulation time	3600	day

Source: Adapted from [Jansen et al. \(2014\)](#).

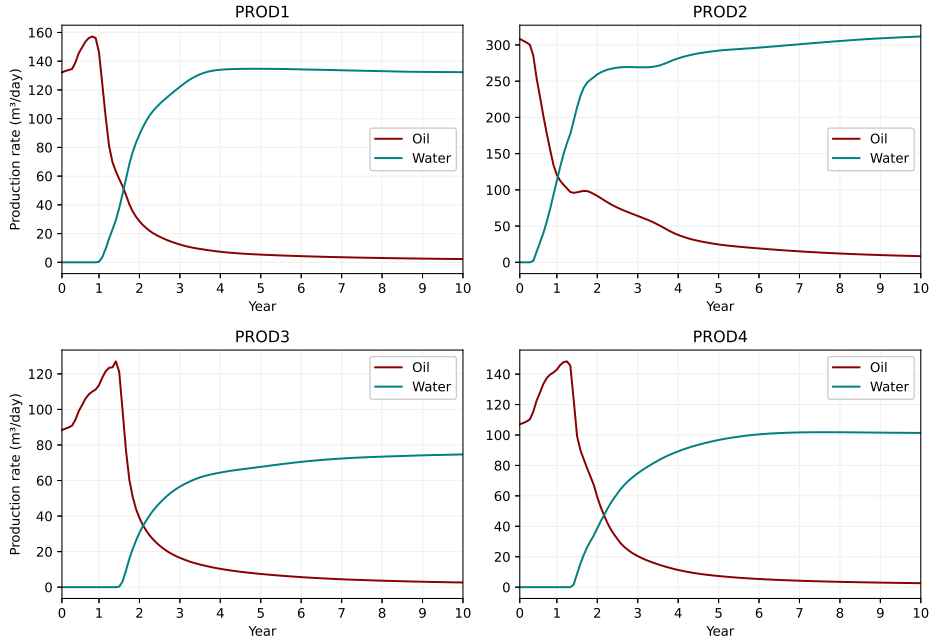**Fig. 4:** Oil and water production rates of the reference model for the four production wells.

In this study, it is assumed that the vertical oil production well is fully penetrating. Accordingly, since there are 3,600 gridblocks in the first layer, of which 2,491 are active cells, this assumption yields 2,491 feasible well placement scenarios, corresponding to the number of active gridblocks in the top layer of the reservoir model. Figure 5 illustrates the spatial distribution of permeability in the top layer for 25 realizations of the Egg model. These realizations were randomly selected from the original set of 101, which consists of one reference field and one hundred initial stochastic models. The models exhibit high-permeability channels within a low-permeability background, with each realization presenting a distinct channel pattern, showing alternative fluvial structures.

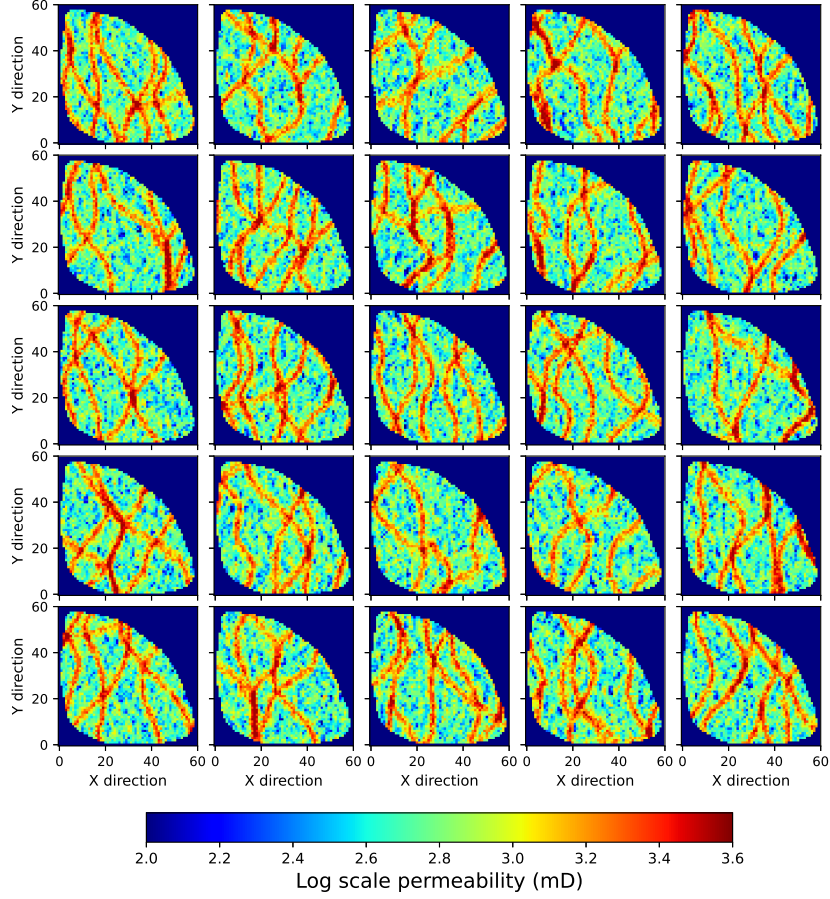


Fig. 5: Permeability distribution maps for top layers of 25 realizations of the Egg model.

4.2 Monte Carlo Simulation

Monte Carlo Simulation is a robust and flexible approach for uncertainty analysis, widely applied in decision-making within petroleum engineering (Bratvold and Begg 2010). The central idea of MCS is to propagate uncertainty from input parameters, such as costs, prices, and geological properties, to key output metrics like NPV, reserves, or production forecasts. By constructing probabilistic models for uncertain inputs and performing repeated sampling, MCS enables the generation of output distributions that provide valuable insights for risk-informed decisions. The general workflow of MCS, including input sampling and output analysis, is illustrated in Figure 6.

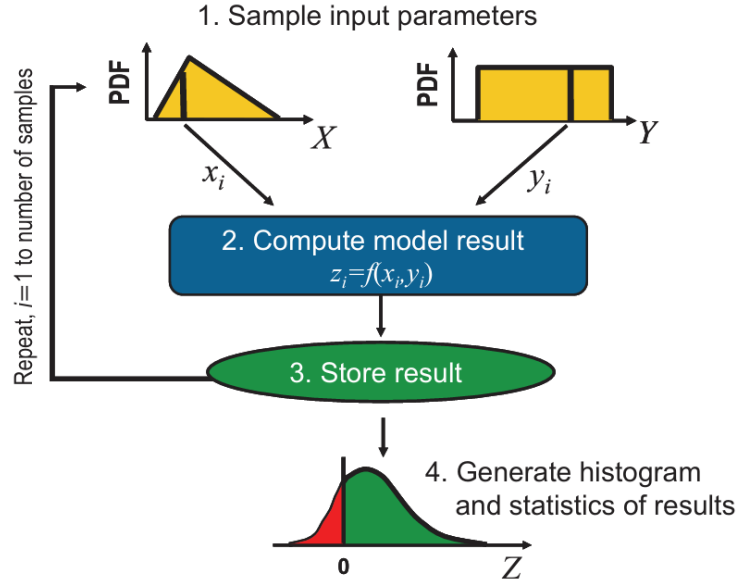


Fig. 6: Schematic of the Monte Carlo Simulation procedure.
Source: Adapted from Bratvold and Begg (2010).

One practical application of this method is the estimation of technical reserves by considering the uncertainties in parameters such as original oil in place (OOIP), technical recovery factor (TRF), and formation volume factor. The input distributions are generally informed by expert elicitation, and the resulting uncertainty in technical reserves can be effectively visualized using probabilistic output distributions—specifically, the probability density function (PDF) and cumulative distribution function (CDF), as depicted in Figure 7. A key theoretical point is that, especially in nonlinear models, the expected output value cannot be obtained simply by applying the model to the expected input values; instead, a full probabilistic analysis is necessary for reliable results.

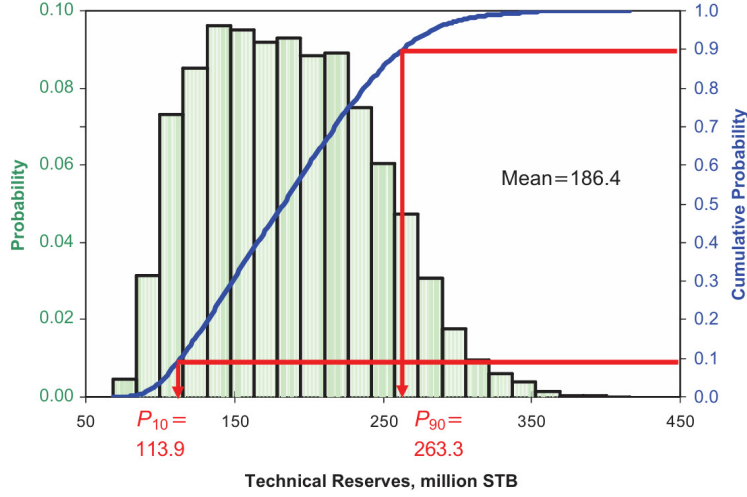


Fig. 7: PDF and CDF of technical reserves. Source: Adapted from [Bratvold and Begg \(2010\)](#).

In this work, we will apply the MCS technique to quantify the uncertainty in the production curves generated by multiple realizations of the Egg model. This approach will enable a more rigorous assessment of the uncertainty associated with production forecasts, following the principles outlined by [Bratvold and Begg \(2010\)](#).

4.3 Geometric Brownian Motion

In the present subsection, we give a brief description of the GBM process that is extensively used in the literature for modeling prices, especially in financial applications, commodity markets and option pricing ([Black and Scholes 1973](#)). In the current paper, we employ the GBM to model variable operating costs. Originally developed by Black and Scholes for financial mathematics, the GBM provides a practical and tractable approach to represent the stochastic evolution of costs, mainly due to its simplicity and the small number of parameters required for calibration.

Definition 1 A stochastic process $B(t)$ is a Brownian Motion if it satisfies the following:

- (i) For any $t > s$, $v > u$ and $u > t$, the increments $B(t) - B(s)$ and $B(v) - B(u)$ are independent.
- (ii) Each increment is a zero-mean Gaussian random variable such that for all $t > s$, $B(t) - B(s) \sim \mathcal{N}(0, t - s)$.
- (iii) $B(0) = 0$.

The following theorem present the asset price dynamics that follows GBM.

Theorem 1 A stochastic process $C(t)$ is said to follow a Geometric Brownian Motion (GBM) if its dynamics are governed by the following equation:

$$dC(t) = \alpha C(t) dt + \sigma C(t) dB(t), \quad (1)$$

where $B(t)$ is a Brownian Motion, α is the constant drift, and σ is the constant volatility. $C(t)$ represents the current variable operating costs, $dC(t)$ change in price, dt change in time, and $dB(t) = \epsilon\sqrt{dt}$, ϵ a Wiener process, which is normally distributed with a mean of zero and a standard deviation of 1, $\mathcal{N}(0, 1)$. The solution for the stochastic differential equation 1 for any arbitrary initial value $C(0)$ is given by:

$$C(t) = C(0) \exp \left[\alpha t - \frac{1}{2} \sigma^2 t + \sigma B(t) \right]. \quad (2)$$

A positive drift ($\alpha > 0$) implies an upward trend in variable operating costs, whereas a negative drift ($\alpha < 0$) indicates a downward trend. The volatility parameter, σ , captures the uncertainty in cost evolution, with higher values leading to greater dispersion in possible future cost paths as time progresses. Figure 8 illustrates examples of the simulated price paths and confidence bands based on 10,000 simulated cases. We employ a GBM with a mean annual rate of increase of $\alpha = 0.02$, a volatility of $\sigma = 0.1$, and an initial variable operating cost of \$10 per barrel, as suggested by Brandão et al. (2005a).

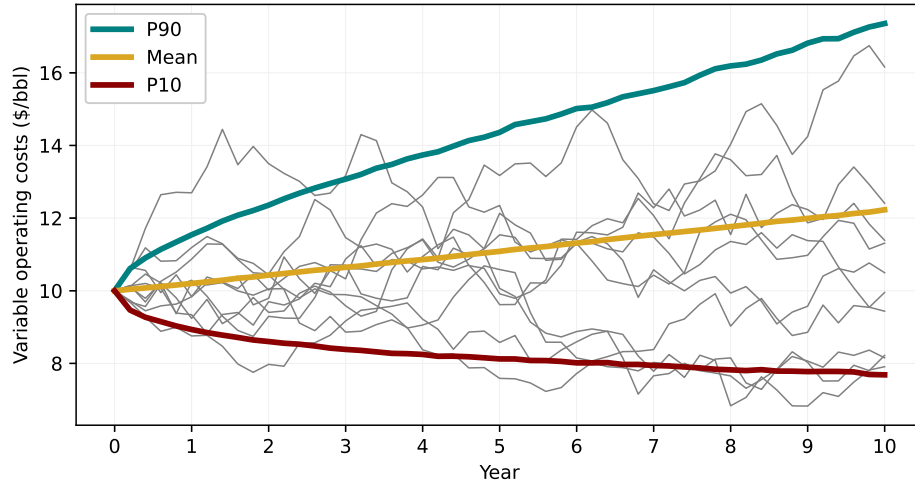


Fig. 8: Variable operating costs simulations (GBM), confidence bands and example price paths.

4.4 Two-Factor Model for Oil Prices

Uncertainty in oil prices is a fundamental source of risk in the economic evaluation of E&P projects. Traditional deterministic models, single-factor stochastic models, and even the widely-used GBM are often unable to capture the full richness and complexity of real oil price behavior, which is characterized by both short-term fluctuations and longer-term structural trends. To better represent these dynamics, we employ the two-factor model introduced by [Schwartz and Smith \(2000\)](#), which decomposes the logarithm of the oil price into short-term and long-term components.

In the Schwartz and Smith model, the long-term equilibrium component, denoted by ξ_t , is modeled as a GBM. This factor represents the persistent trend to which oil prices revert, capturing structural drivers such as technological innovation, depletion of reserves, inflation, and evolving market expectations. The short-term component, denoted by χ_t , is modeled as a mean-reverting Ornstein-Uhlenbeck process, which reflects temporary deviations from equilibrium due to market shocks, geopolitical events, and supply-demand imbalances.

The risk-neutral dynamics of the two-factor model are described by the following system of stochastic differential equations:

$$d\chi_t = (-\kappa\chi_t - \lambda_\chi) dt + \sigma_\chi dz_\chi, \quad (3)$$

$$d\xi_t = (\mu_\xi - \lambda_\xi) dt + \sigma_\xi dz_\xi, \quad (4)$$

where

- χ_t is the short-term deviation from equilibrium,
- ξ_t is the long-term equilibrium component,
- μ_ξ is the drift of the long-term factor,
- κ is the mean-reversion speed of the short-term factor,
- λ_χ and λ_ξ are the risk premia for the short-term and long-term factors, respectively,
- σ_χ and σ_ξ are the volatilities of the short-term and long-term factors, respectively,
- dz_χ and dz_ξ are correlated increments of standard Brownian Motion processes with $dz_\chi dz_\xi = \rho_{\chi\xi} dt$.

The logarithmic oil price at time t is then given by:

$$\ln(P_t) = \chi_t + \xi_t, \quad (5)$$

and the spot price itself can be recovered as:

$$P_t = \exp(\chi_t + \xi_t). \quad (6)$$

For numerical implementation, the continuous-time stochastic differential equations (3) and (4) are discretized as follows ([Thomas and Bratvold 2015](#); [Fedorov](#)

et al. 2021):

$$\chi_{t+1} = \chi_t e^{-\kappa \Delta t} - (1 - e^{-\kappa \Delta t}) \frac{\lambda_\chi}{\kappa} + \sigma_\chi \varepsilon_\chi \sqrt{\frac{1 - e^{-2\kappa \Delta t}}{2\kappa}}, \quad (7)$$

$$\xi_{t+1} = \xi_t + (\mu_\xi - \lambda_\xi) \Delta t + \sigma_\xi \varepsilon_\xi \sqrt{\Delta t}, \quad (8)$$

where ε_ξ and ε_χ are standard normal random variables, and Δt is the time increment.

According to Wiersema (2008), if ε_ξ and ε are two independent standard normal random variables, it is possible to introduce correlation between the price processes described in equations (7) and (8). This can be achieved by defining the random variable of the second process as:

$$\varepsilon_\chi = \varepsilon_\xi \rho_{\chi\xi} + \varepsilon \sqrt{1 - \rho_{\chi\xi}^2}, \quad (9)$$

where $\rho_{\chi\xi}$ denotes the correlation coefficient between the two processes.

This modeling approach allows us to jointly capture both the short-term volatility and long-term trends observed in oil price dynamics. By adopting the two-factor model, the analysis can more accurately reflect the stochastic behavior of oil prices seen in historical data, thereby enabling more robust valuation, forecasting, and risk assessment for oil and gas investments.

The oil price model is characterized by seven parameters (κ , σ_ξ , σ_χ , μ_ξ , λ_χ , λ_ξ , and $\rho_{\chi\xi}$), as well as two initial states, ξ_0 and χ_0 , which need to be estimated. Since these parameters are not directly observable in commodity markets, an appropriate calibration methodology is required. In this work, we follow the procedure proposed by Goodwin (2013), which utilizes the Kalman filter in conjunction with maximum likelihood estimation. The Kalman filter provides recursive estimates of the unobserved parameters by generating a posterior conditional distribution, given a time series of spot and futures prices and the corresponding measurement covariance matrix.

For our calibration, we use the yearly average of Brent crude oil futures prices from January 3, 2000, to March 7, 2025. Specifically, for each year, we observe six futures prices for contracts maturing in 1, 3, 5, 7, 9, and 13 months. Figure 9 displays both observed and simulated expected futures prices using the calibrated parameters. The parameters resulting from the calibration are listed in Table 4.

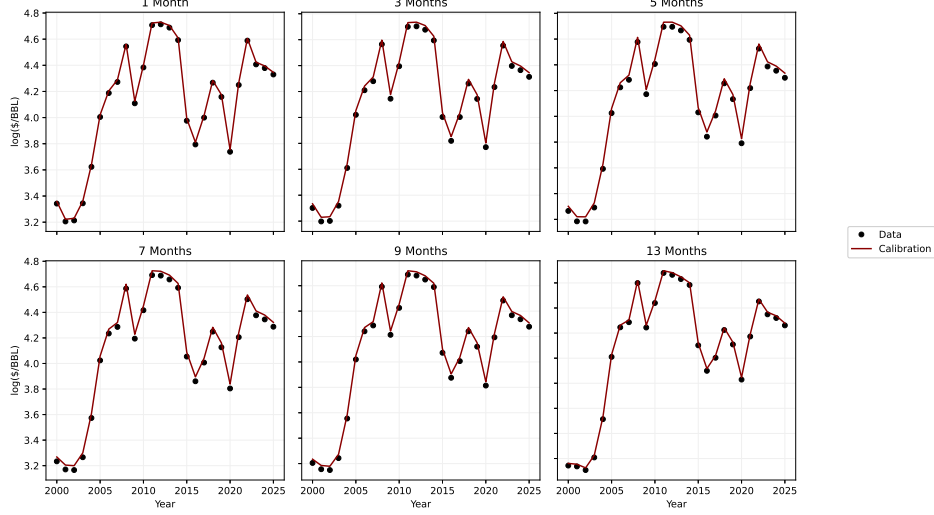


Fig. 9: Schwartz-Smith model calibration for oil prices.

Table 4: Calibrated parameter values used for the Schwartz-Smith model

Parameter	Value	Parameter	Value
χ_0	0.049	ξ_0	4.207
κ	3.771	μ_ξ	-0.161
σ_χ	0.287	σ_ξ	0.222
λ_χ	-0.202	λ_ξ	-0.092
$\rho_{\chi\xi}$	0.398		

Schwartz and Smith (2000) mentioned that far-maturity futures contracts provide information about the long-term factor, whereas spot and near-maturity contracts inform the short-term factor. Using two-factor model, they derived a closed-form solution for the value of a futures contract as follows:

$$\ln(F_{T,0}) = e^{-\kappa T} \chi_0 + \xi_0 + \mathcal{A}(T) \quad (10)$$

where the adjustment term $\mathcal{A}(T)$ is defined by:

$$\mathcal{A}(T) = (\mu_\xi - \lambda_\xi) T - (1 - e^{-\kappa T}) \frac{\lambda_\chi}{\kappa} + \frac{1}{2} \left[(1 - e^{-2\kappa T}) \frac{\sigma_\chi^2}{2\kappa} + \sigma_\xi^2 T + 2(1 - e^{-\kappa T}) \frac{\rho_{\chi\xi} \sigma_\chi \sigma_\xi}{\kappa} \right] \quad (11)$$

In this work, we adopted this approach and employed the calibrated parameters listed in Table 4 to compute the expected futures oil prices. Figure 10 illustrates examples of the simulated oil price paths and confidence bands based on 10,000 simulated

cases. These simulated paths in Figure 10 will be used in the evaluation of the Egg model, which will be discussed in Subsection 5.2. Fedorov et al. (2021) concluded that the Schwartz-Smith two-factor model provides a more realistic representation of oil price risk and the likely dynamics of future oil prices, especially when compared to the classical GBM and Mean-Reverting models. According to his findings, two-factor model more accurately captures both the uncertainties and the probable paths of future prices, making it preferable for modeling oil price evolution.

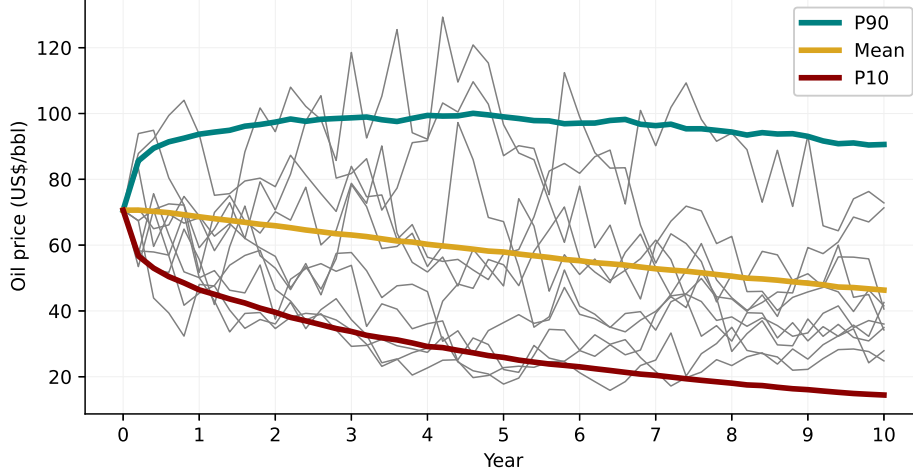


Fig. 10: Oil price simulations (Two-Factor), confidence bands and example price paths.

4.5 Least Squares Monte Carlo

The valuation of real and financial options with early exercise features, such as American options, presents significant challenges due to the complexity of calculating the optimal value associated with the flexibility of exercise over time. LSM method, proposed by Longstaff and Schwartz (2001), is currently considered one of the most efficient algorithms for this type of problem, especially in situations with multiple sources of uncertainty and/or path dependence of the underlying asset (Thomas and Bratvold 2015; Ahmadi and Bratvold 2023). LSM method aims to approximate, on a path-by-path basis, the optimal stopping rule that yields the maximum possible value for an American option. For illustrative purposes, we consider the case in which early exercise is allowed only at a finite set of K discrete times, $0 < t_1 \leq t_2 \leq \dots \leq t_K = T$, and we determine the optimal exercise decision at each of these dates. While American options are often exercisable at any time prior to maturity, this continuous feature can be effectively handled in the LSM approach by choosing a sufficiently fine discretization (i.e., a large K), thereby closely approximating the continuous-time setting.

LSM approach involves comparing the immediate payoff of exercising the option before its expiration with the estimated value of continuing to hold the option. The

decision to exercise is made whenever the immediate payoff exceeds the continuation value. The core idea of their method lies in estimating the conditional expectation of future payoffs using least squares regression, leveraging cross-sectional data obtained from MCS. At each potential exercise date, a regression is performed by relating the simulated continuation values to functions of the relevant state variables, thus approximating the conditional expectation at that moment. This cross-sectional dataset is constructed by simulating paths of the uncertain variables over time. The resulting estimation process allows for the approximation of the optimal exercise strategy along each simulation path, forming the foundation of what is now widely known as the LSM method (Longstaff and Schwartz 2001).

LSM algorithm can be summarized in the following main steps (Longstaff and Schwartz 2001; Ahmadi and Bratvold 2023):

- (i) A sufficiently large number of paths of the uncertain variables is generated by MCS.
- (ii) At each exercise date, for the paths where the option is *in the money*, a regression is performed of the future continuation values (obtained from the simulations) on functions of the state variables.
- (iii) The basis functions for the Hilbert space of possible continuation values are typically chosen as orthogonal polynomials in L^2 .
- (iv) The fitted value from the regression is taken as an estimate of the conditional expected continuation value; this is then compared with the immediate payoff to determine whether the option should be exercised.
- (v) This procedure is applied recursively for all exercise dates, from maturity backward to the initial time.

The space of square-integrable functions L^2 used in the LSM regression is a Hilbert space, for which there exists an orthonormal basis. In this paper, we use Laguerre polynomials as basis functions, which are defined as follows:

$$L_0(x) = \exp\left(-\frac{x}{2}\right), \quad (12)$$

$$L_1(x) = \exp\left(-\frac{x}{2}\right)(1-x), \quad (13)$$

$$L_2(x) = \exp\left(-\frac{x}{2}\right)\left(1-2x+\frac{x^2}{2}\right), \quad (14)$$

$$L_n(x) = \exp\left(-\frac{x}{2}\right) \frac{e^x}{n!} \frac{d^n}{dx^n} (x^n e^{-x}). \quad (15)$$

With these polynomials as basis functions, the continuation value function $F(\omega; t_{k-1})$ can be approximated by a linear combination of them:

$$F(\omega, t_{K-1}) = \sum_{j=0}^{\infty} a_j L_j(x), \quad (16)$$

where the a_j coefficients are constants. Other orthogonal polynomials, such as Hermite, Legendre, Jacobi, or Chebyshev polynomials, may also be used as basis functions (Longstaff and Schwartz 2001). LSM approach presents fundamental advantages over other methods, as it is not very sensitive to the dimensionality of the problem (number of sources of uncertainty), and it is widely used in ROA in the oil and gas industry, since it can efficiently approximate dynamic programming for the selection of single or multiple exercise options (Ahmadi and Bratvold 2023).

At any decision time t_k , the investor can immediately realize a known cash flow by exercising the option, so the value of immediate exercise at t_k is equal to this cash flow. In contrast, the value from continuing the project beyond t_k involves uncertain future cash flows, which are not known at the decision time. According to risk-neutral valuation principles, the value of continuing the option, assuming that exercise is not permitted until after t_k , is obtained by taking the expectation of the discounted sum of future cash flows $C(\omega, t_j; t_k, T)$, under the risk-neutral measure Q . Thus, the continuation value $F(\omega; t_k)$ at time t_k can be written as (Longstaff and Schwartz 2001):

$$F(\omega; t_k) = \mathbb{E}_Q \left[\sum_{j=k+1}^K \exp \left(- \int_{t_k}^{t_j} r(\omega, s) ds \right) C(\omega, t_j; t_k, T) \mid \mathcal{F}_{t_k} \right], \quad (17)$$

where $r(\omega, t)$ denotes the (potentially stochastic) risk-free discount rate, and the expectation is conditional on the available information set $\mathcal{F}_{t_k}$ at time t_k . This approach leads to the standard ROA: at each decision point, the investor should compare the value of immediate exercise with the conditional expectation of continuation (Longstaff and Schwartz 2001). The optimal policy is to exercise when the immediate payoff is positive and exceeds the expected value of waiting.

Smith (2005) presented one of the early applications of the LSM method to a simplified oil production project, using the illustrative case study developed by Brandão et al. (2005a,b). The analysis incorporated both the option to buy out the partnership share at a given cost and the option to divest the project in exchange for a predetermined cash flow. BDH problem, which will be discussed in Subsection 5.1, provides a clear and practical decision-making framework for ROA. Its simplicity, combined with relevant managerial flexibility, makes it particularly advantageous for illustrating the solution of optimal policies and project valuation. Furthermore, it is straightforward for readers to replicate and adapt this example for their own analyses (Ahmadi and Bratvold 2023).

5 Results

5.1 First case: BDH problem

Brandão et al. (2005a) introduces the BDH problem, which evaluates an oil production project whose results are then used to build the binomial decision tree approach that underpins the ROA, as described in Section 4. To model uncertainty, the authors use a GBM for the oil price and operating costs. After many iterations (e.g., 10,000), and using a 10% risk-adjusted discount rate, they estimate the present value of expected

cash flow at \$404 million, see Table 1. This result is the base value of the original BDH problem, excluding managerial flexibility or options. Figure 11 illustrate production profile for BDH problem according to values in Tables 1 and 2.

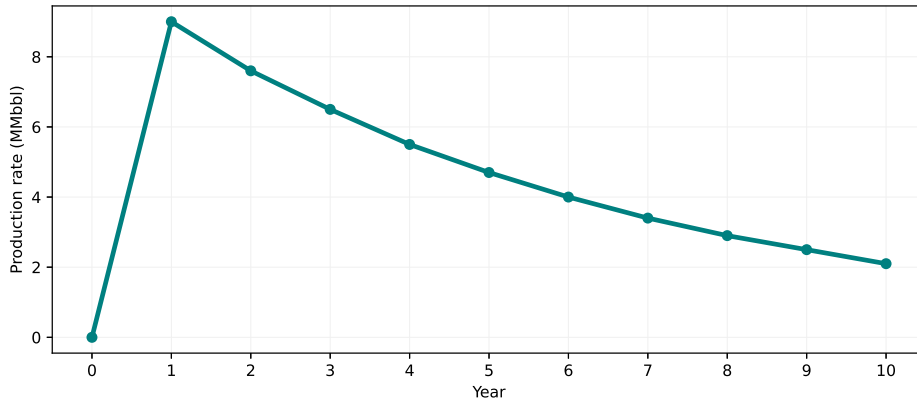


Fig. 11: Production profile for BDH problem.

When revisiting the BDH problem, Smith (2005) considered a risk-neutral growth rate of 0% per year for oil prices, modeled as a GBM as shown in Figure 12, and used a risk-free discount rate of 5%, while keeping all other parameters unchanged. Under these assumptions, the present value of the cash flows without options is \$392 million.

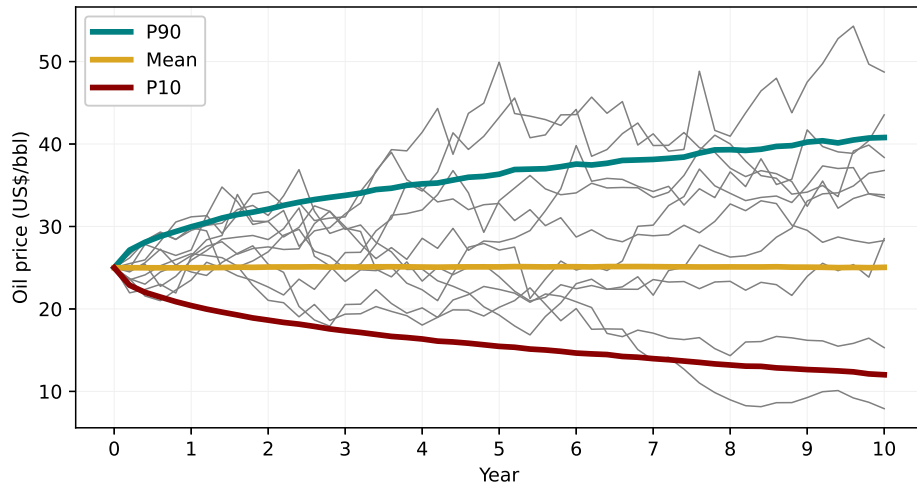


Fig. 12: Oil price simulations (GBM), confidence bands and example price paths.

In the BDH problem, the field developer initially owns 75% of the project. At Year 5, two managerial flexibilities are available: the owner can either divest the project, receiving an additional \$100 million in profit plus the cumulative cash flows up to that point, or buy out the remaining 25% share for \$40 million, securing full ownership of future project cash flows until expiration. These options can be exercised at a single, specific decision point, or the owner may choose to continue without exercising any option.

At this decision point, the option holder may select among three alternatives: (i) continuation, (ii) buyout, or (iii) divestment. The value of the project at time t and path j , denoted $v_{t,j}$, is computed recursively using dynamic programming employed in the LSM, as shown in (Smith 2005; Ahmadi and Bratvold 2023):

$$v_{t,j} = \begin{cases} c_{t,j} + \frac{v_{t+1,j}}{1+r}, & \text{continuation} \\ c_{t,j} + \frac{4}{3} \frac{v_{t+1,j}}{1+r} - 40, & \text{buyout} \\ c_{t,j} + 100, & \text{divest} \end{cases} \quad (18)$$

where $c_{t,j}$ is the cash flow received at time t and path j , $v_{t+1,j}$ is the calculated value at the next time step, and r is the risk-free discount rate.

The model incorporates two sources of uncertainty: oil price and variable operating cost, both contributing to valuation risk. The present value of the project with options is calculated to be \$421 million, which was obtained using the LSM method based on simulation combined with linear regression. Figure 13 presents the relative frequency distribution for the project's present value without the option, as well as with the options to divest, buy out, or continue, where managerial flexibility can be exercised in Year 5. Consequently, the expected value of the embedded option in the project is estimated to be \$29 million.

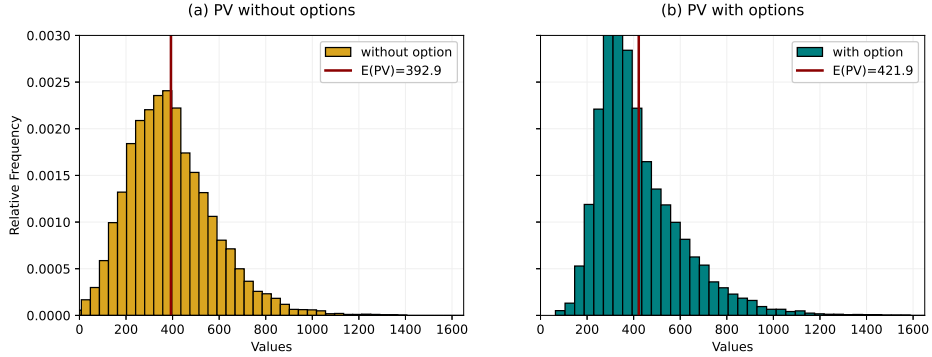


Fig. 13: PV of the project (a) without options and (b) with options in Year 5.

Value of Flexibility arises from the ability to adapt project decisions as uncertainties are progressively resolved, rather than committing to a single deterministic

plan. As highlighted by [Begg et al. \(2002\)](#), incorporating managerial flexibility, such as options to defer, expand, buyout or divest a project, enables decision-makers to both mitigate downside risks and capture upside opportunities, thereby increasing the expected value of the project. Through real-world examples, these authors demonstrate that structuring projects with flexible alternatives can add substantial value, especially in contexts where uncertainty is significant and cannot be fully eliminated through information gathering alone. Thus, evaluating and explicitly incorporating flexibility should be a fundamental part of decision analysis in uncertain environments.

In the case of the BDH problem, we consider that the options to continue, buyout, or divest can be exercised at any time from Year 1 to Year 10 of field production, rather than only in Year 5 as initially proposed by [Brandão et al. \(2005a,b\)](#). The results are presented in Figure 14, where we clearly observe an increase in the project value to \$484 million. In other words, the option value increased from \$29 million to \$92 million, representing an approximate 317% increase in the option value.

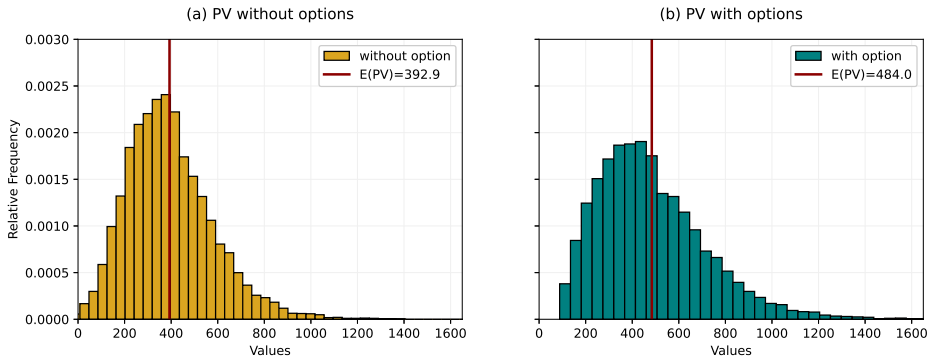


Fig. 14: PV of the project (a) without options and (b) with options from Year 1 to Year 10.

Value of Flexibility refers to the benefit of designing projects with the capability to adapt decisions as uncertainties are resolved over time. This analysis, analogous to the VoI, seeks to determine whether the expected advantage of incorporating managerial flexibility justifies its cost. Before allocating resources to acquire additional information based solely on a positive expected monetary value from a VoI analysis, it is crucial for decision-makers focused on value maximization to also evaluate the potential gains from flexible project structures ([Begg et al. 2002](#)).

Flexibility tends to be particularly advantageous under the following conditions ([Bratvold and Begg 2010](#)):

1. When reducing uncertainty through information acquisition is not feasible.
2. When the cost of flexibility is lower than the cost of obtaining information.
3. When it is necessary to manage residual uncertainty after information has been collected.

4. When flexibility enables the creation of additional value.

In general, the first three cases primarily address risk mitigation, while the last one aims to exploit upside potential associated with uncertainty.

Figure 15 presents the results generated by the LSM algorithm using an alternative visualization. The diagram illustrates, for each year, the probability associated with each available decision—buyout, continue, or divest—conditioned on the information available at Year 0. This type of representation offers decision makers a clear understanding of the most likely actions throughout the project horizon (Jafarizadeh and Bratvold 2017).

As an illustrative example, Figure 15 indicates that, in 9,930 out of 10,000 simulated paths, the optimal strategy is to buyout the partner’s share right at the start of the project. From the second year onwards, the recommended decision generally shifts towards continuing the project, although the probability of this choice gradually decreases over time. Conversely, the probability of opting for divestment shows a slight upward trend as the project progresses.

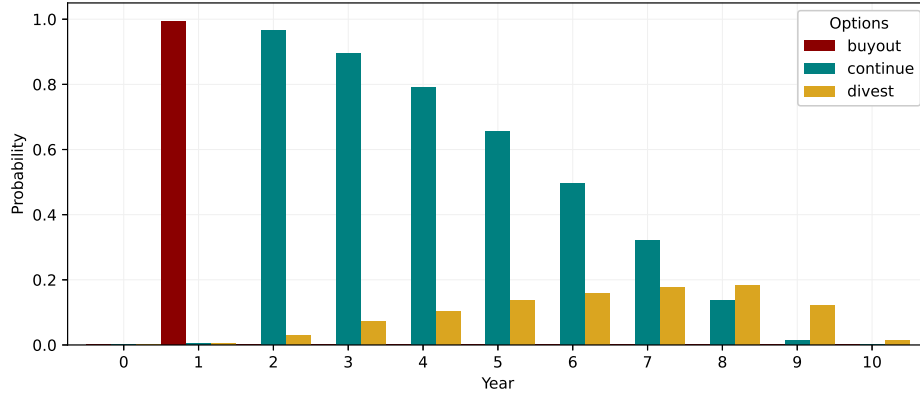


Fig. 15: Probability of each option for the project in each year.

Figure 16 presents the decision maps for four selected time periods ($t = 3, 5, 7, 9$). These maps were generated from the simulation outputs of oil price and variable operating costs, together with the optimal decisions obtained from the real options analysis. Only the alternatives *continue* and *divest* are represented, as the *buyout* option is not available in these specific periods (see Figure 15). The teal regions correspond to states where the *continue* alternative yields the highest project value, while the goldenrod regions indicate conditions where *divest* becomes optimal.

To construct these maps, oil price (US\$/bbl) and variable operating cost (US\$/bbl) data were extracted for each selected period from the simulated paths. The optimal decision in each state was encoded numerically using mapping: `continue` = 0, `divest`

= 1. A mask excluded any states corresponding to non-relevant options. The resulting state–decision pairs were used to train a `KNeighborsClassifier` ($k = 1$), which predicts the optimal decision for any given combination of oil price and operating cost.

A regular grid was defined over the range of possible oil prices (10–80 US\$/bbl) and variable operating costs (3–20 US\$/bbl), using 300 subdivisions in each dimension. The trained classifier was applied to all grid points, generating a matrix of predicted decisions. This classification map was then visualized with a two-color colormap (**teal** for *continue* and **goldenrod** for *divest*), producing a clear separation between decision regions.

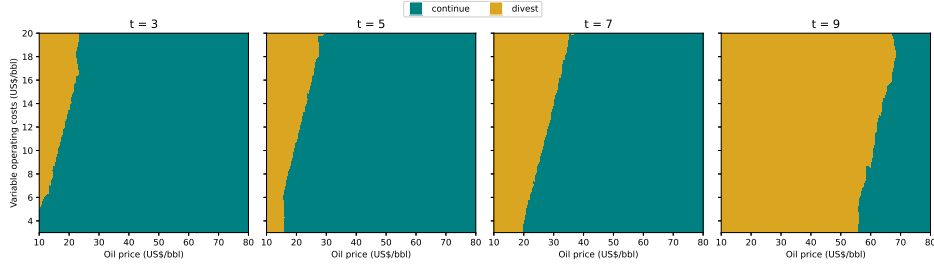


Fig. 16: Decision maps for different time periods.

The results of Figure 16 reveal the progressive expansion of the *divest* region over time, in agreement with the probability trends shown in Figure 15. At early stages ($t = 3$), *continue* dominates almost the entire decision space, while at later stages ($t = 9$), the *divest* alternative covers most scenarios, reflecting the decreasing attractiveness of project continuation under uncertainty.

Proceeding with the analysis, to highlight the value of flexibility, Figure 17 shows the present value of the project when the options can be exercised at different periods. The darkred line represents the project’s present value assuming the option can be exercised in Year 1, Year 2, and so on, up to Year 10. It can be observed that the highest values occur at the beginning and at the end of the project, at \$455 and \$454 million, respectively. The lowest project value with the option, \$421 million, is found in Year 5 (and Year 4), which corresponds precisely to the BDH Problem, as also shown in Figure 13.

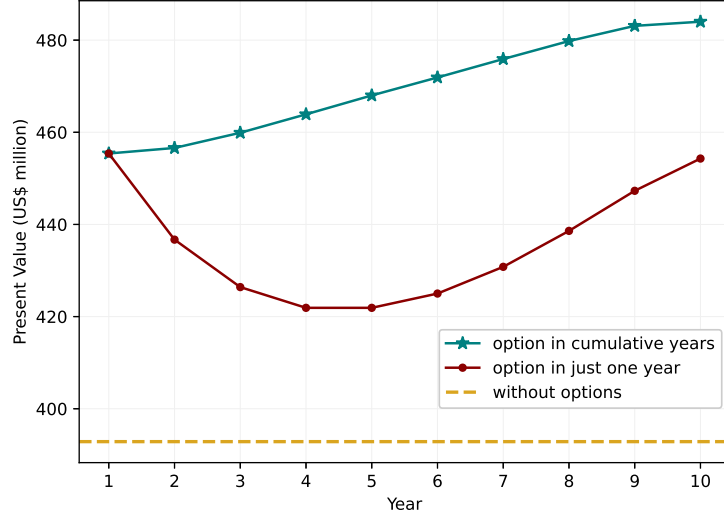


Fig. 17: Present values of the project for options exercised at different times.

Teal line in Figure 17 illustrates the present value of the project with options as the number of years available to exercise the option increases. It starts with the project value when the option can only be exercised in Year 1, then includes Years 1 and 2, then Years 1, 2, and 3, and so on, cumulatively adding each year until reaching the case where the option can be exercised throughout the entire period, from Year 1 to Year 10. In this latter scenario, the present value of the project reaches \$484 million, which is the same value presented in Figure 14. This result confirms that increasing the flexibility to exercise options leads to a higher project value. Additionally, Figure 17 shows that, in any scenario where options are available, the present value of the project is always higher than the present value without options, which is \$392 million (dashed goldenrod line).

5.2 Second case: 3D Egg Model

The methodology and results developed for the BDH problem are now extended to the 3D Egg model. The main distinction lies in the treatment of production profiles: in this case, production curves are explicitly considered as an additional source of uncertainty, since multiple permeability realizations from the Egg model yield different production curves for the producer wells. In contrast, for the BDH problem, the production profile was assumed to be fixed (see Figure 11).

Figure 18 shows the production rates profiles for the four producing wells (PROD1-PROD4) over a 10-year period, based on the results of 101 reservoir simulation runs for the 3D Egg model (see Figure 3). The thin teal curves represent the outcomes of multiple simulation realizations, capturing the variability in production behavior due

to geological uncertainty. The thick darkred line denotes the mean production rate across all realizations for each well.

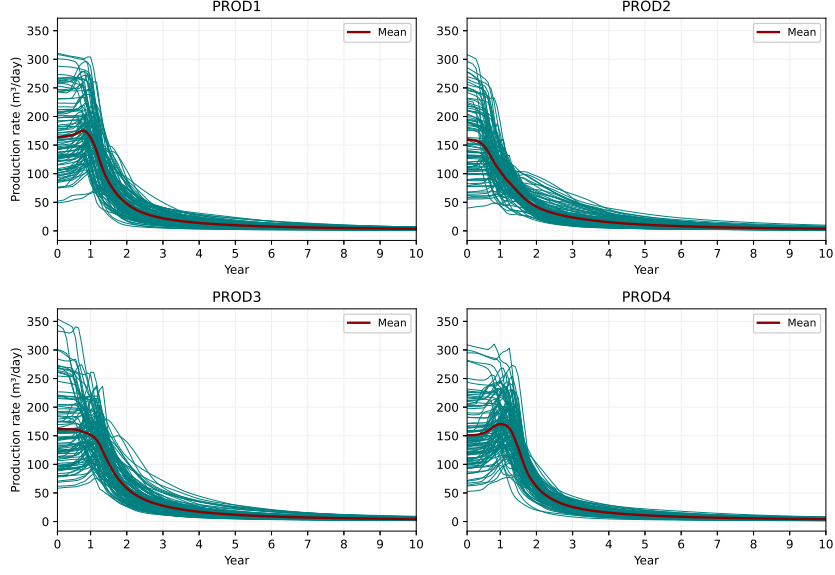


Fig. 18: Four production wells over time for each of the 101 realizations.

All wells exhibit the typical decline pattern observed in reservoir production: high initial rates during the early years, followed by a sharp decrease, and a subsequent stabilization at low production levels toward the end of the simulated period. The spread of the individual curves around the mean highlights the variability in production performance, which is more pronounced during the initial years and tends to converge as production rates diminish. These results provide valuable insights for quantifying uncertainty in field development planning and for comparing the relative performance of each producing well under uncertain reservoir conditions.

Figure 19(a) shows the field-level oil production profile for the benchmark Egg model, obtained by aggregating the production from the four producing wells (PROD1–PROD4). Production rates are expressed in million barrels (MMbbl). Thin teal curves represent the results of all simulation realizations, while the thick darkred line corresponds to the mean production profile across all realizations. Similar to the individual well behavior, the aggregated field production exhibits a sharp initial decline followed by a gradual stabilization, reflecting the combined reservoir dynamics under geological uncertainty.

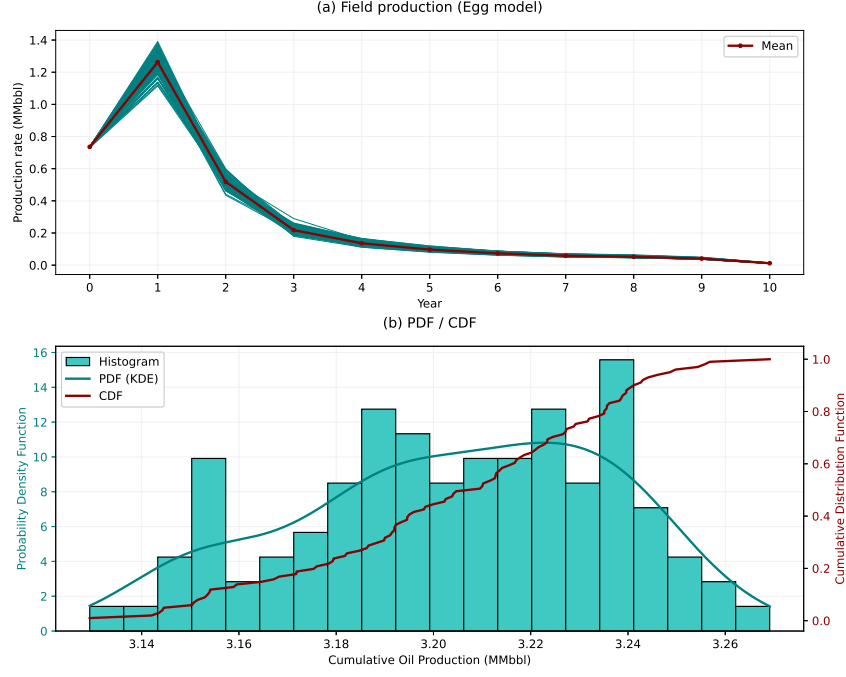
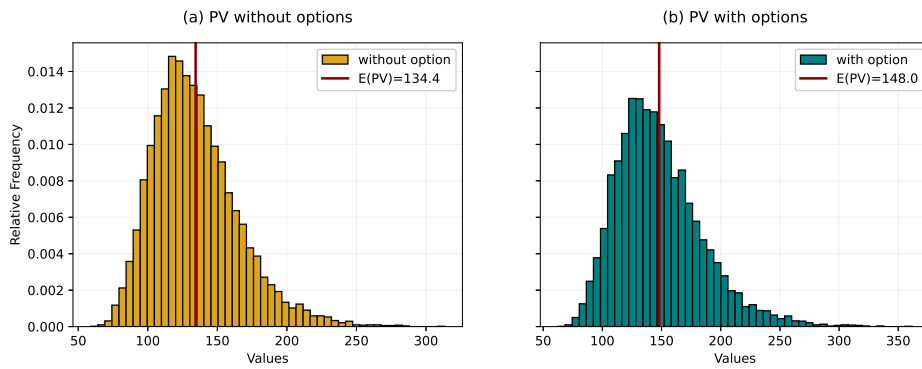


Fig. 19: (a) Field production for the benchmark Egg model and (b) Probability Density Function (PDF) and Cumulative Distribution Function (CDF).

Figure 19(b) presents the statistical characterization of cumulative oil production at the end of the simulation period. The histogram represents the frequency distribution of the simulated cumulative production values. Probability density function (PDF), estimated using a kernel density estimation (KDE) method, provides a smooth representation of the underlying probability distribution, allowing for a clearer visualization of the most probable production outcomes. Cumulative distribution function (CDF), plotted in darkred, indicates the probability that the cumulative oil production will be less than or equal to a given value, thus enabling the direct estimation of percentile-based production metrics (e.g., P10, P50, P90). Together, these representations quantify the uncertainty in total field production and provide probabilistic insights for decision-making.

Table 5: Base Case Expected Cash Flows for the 3D Egg model

Year	0	1	2	3	4	5	6	7	8	9	10
Production Level	0.736	1.262	0.518	0.218	0.136	0.097	0.073	0.059	0.052	0.041	0.012
Variable Op Cost Rate	5.00	5.10	5.20	5.311	5.41	5.52	5.63	5.74	5.86	5.98	6.09
Oil Price	70.62	68.61	65.89	63.08	60.25	57.91	55.27	52.81	50.56	48.43	46.33
Revenues	51.95	86.61	34.16	13.74	8.20	5.61	4.06	3.09	2.63	1.97	0.56
Production Cost	(3.98)	(6.74)	(3.00)	(1.46)	(1.04)	(0.83)	(0.71)	(0.64)	(0.61)	(0.54)	(0.37)
Cash Flow	47.97	79.88	31.16	12.29	7.17	4.77	3.34	2.46	2.03	1.43	0.19
Profit Sharing	(11.99)	(19.97)	(7.79)	(3.07)	(1.79)	(1.19)	(0.84)	(0.61)	(0.51)	(0.36)	(0.05)
Net Cash Flows	35.98	59.91	23.37	9.21	5.37	3.58	2.51	1.84	1.52	1.07	0.14
PV of Cash Flows	134.41	103.35	45.61	23.35	14.84	9.94	6.68	4.38	2.67	1.20	0.14

**Fig. 20:** PV of the Egg model (a) without options and (b) with options from Year 1 to Year 10.

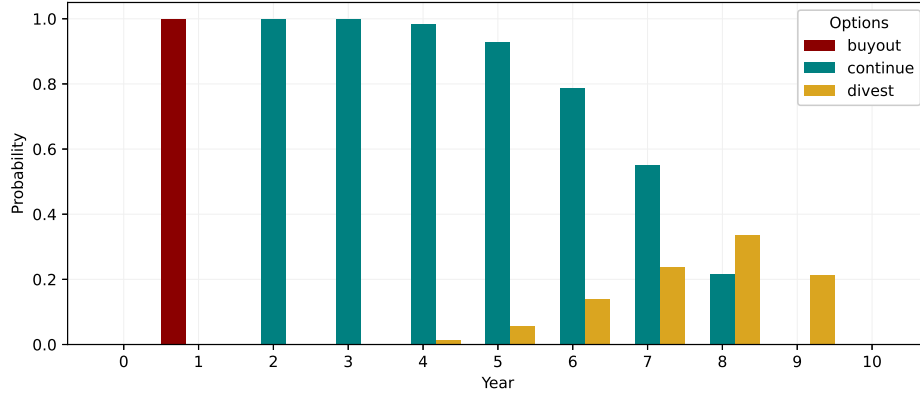


Fig. 21: Probability of each option for the Egg model in each year.

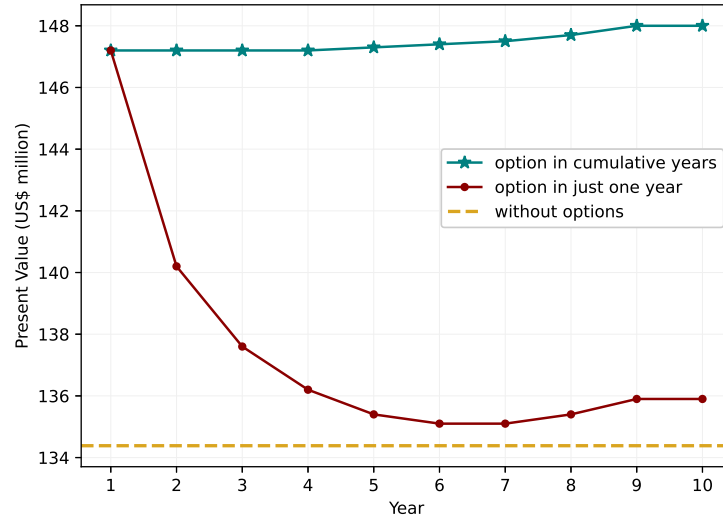


Fig. 22: Present values of the Egg model for options exercised at different times.

6 Conclusion

Acknowledgements. This study was financed in part by the Coordenação de Aperfeiçoamento de Pessoal de Nível Superior - Brasil (CAPES) - Process N° 88881.980521/2024-01. The corresponding author acknowledges the financial support provided by Petrobras.

References

- Ahmadi R, Bratvold RB (2023) An exposition of least square Monte Carlo approach for real options valuation. *Journal of Petroleum Science and Engineering* 222:111230. <https://doi.org/10.1016/j.petrol.2022.111230>
- Al-Harthy MH (2007) Stochastic oil price models: comparison and impact. *The Engineering Economist* 52:269–284. <https://doi.org/10.1080/00137910701503944>
- Aliaga W (2018) Valuation of Government Incentives for Hydrocarbon Asset Developments – A Real Option Approach. SPE Annual Technical Conference and Exhibition, Dallas, TX SPE-191578-MS. <https://doi.org/10.2118/191578-MS>
- Begg SH, Bratvold RB, Campbell J (2002) The Value of Flexibility in Managing Uncertainty in Oil and Gas Investments. SPE Annual Technical Conference and Exhibition, San Antonio, TX SPE-77586-MS. <https://doi.org/10.2118/77586-MS>
- Bickel JE, Bratvold RB (2008) From uncertainty quantification to decision making in the oil and gas industry. *Energy Exploration & Exploitation* 26:311–325. <https://doi.org/10.1260/014459808787945344>
- Black F, Scholes M (1973) The pricing of options and corporate liabilities. *Journal of Political Economy* 81:637–654. <https://doi.org/10.1086/260062>
- Brandão LE, Dyer JS, Hahn W (2005a) Using binomial decision trees to solve real-option valuation problems. *Decision Analysis* 2:69–88. <https://doi.org/10.1287/deca.1050.0040>
- Brandão LE, Dyer JS, Hahn W (2005b) Response to Comments on Brandão et al. *Decision Analysis* 2:103–109. <https://doi.org/10.1287/deca.1050.0042>
- Bratvold RB, Begg SH (2010) *Making Good Decisions*. Society of Petroleum Engineers
- Chorn LG, Shokhor S (2006) Real options for risk management in petroleum development investments. *Energy Economics* 28:489–505. <https://doi.org/10.1016/j.eneco.2006.03.002>
- Dias MAG (2004) Valuation of exploration and production assets: an overview of real options models. *Journal of Petroleum Science and Engineering* 44:93–114. <https://doi.org/10.1016/j.petrol.2004.02.008>
- Dixit AK, Pindyck RS (1994) *Investment under Uncertainty*. Princeton University Press
- Fedorov S, Hagspiel V, Lerdahl T (2021) Real options approach for a staged field development with optional wells. *Journal of Petroleum Science and Engineering* 205:108837. <https://doi.org/10.1016/j.petrol.2021.108837>

- Fedorov S, Amar MN, Hagspiel V, et al (2022) Sequential production of two oil fields with an option to switch. *Journal of Petroleum Science and Engineering* 218:110933. <https://doi.org/10.1016/j.petrol.2022.110933>
- Fedorov S, Hagspiel V, Haseldonckx S, et al (2025) A compound real options framework for optimal project portfolio allocation under uncertainty: The case of marginal field development under reservoir and price uncertainty. *Geoenergy Science and Engineering* 244:213472. <https://doi.org/10.1016/j.geoen.2024.213472>
- Fonseca MN, Pamplona EO, Valerio VEM, et al (2017) Oil price volatility: A real option valuation approach in an African oil field. *Journal of Petroleum Science and Engineering* 150:297–304. <https://doi.org/10.1016/j.petrol.2016.12.024>
- Goodwin D (2013) Schwartz-Smith Two-Factor Model in the Copper Market: before and after the New Market Dynamics. School of Economics and Management - Lund University - Department of Economics:Master Thesis
- Guedes J, Santos P (2016) Valuing an offshore oil exploration and production project through real options analysis. *Energy Economics* 60:377–386. <https://doi.org/10.1016/j.eneco.2016.09.024>
- Jafarizadeh B, Bratvold RB (2009) Real Options Analysis in Petroleum Exploration and Production: A New Paradigm in Investment Analysis. SPE EUROPEC/EAGE Annual Conference and Exhibition, Amsterdam, The Netherlands SPE-121426-MS. <https://doi.org/10.2118/121426-MS>
- Jafarizadeh B, Bratvold RB (2017) Two-Factor Oil-Price Model and Real Option Valuation: An Example of Oilfield Abandonment. SPE Economics & Management SPE-162862-PA. <https://doi.org/10.2118/162862-PA>
- Jansen JD, Fonseca RM, Kahrobaei S, et al (2014) The Egg model - a geological ensemble for reservoir simulation. *Geoscience Data Journal* 1:192–195. <https://doi.org/10.1002/gdj3.21>
- Longstaff FA, Schwartz ES (2001) Valuing American Options by Simulation: A Simple Least-Squares Approach. *The Review of Financial Studies* 14:113–147. <https://doi.org/10.1093/rfs/14.1.113>
- Sales L, Jaschke J, Stanko M (2021) Early field planning using optimisation and considering uncertainties: Study case of an offshore deepwater field in brazil. *Journal of Petroleum Science and Engineering* 207:109058. <https://doi.org/10.1016/j.petrol.2021.109058>
- Schwartz E, Smith JE (2000) Short-Term Variations and Long-Term Dynamics in Commodity Prices. *Management Science* 46:893–911. <https://doi.org/10.1287/mnsc.46.7.893.12034>

- Smith JE (2005) Alternative Approaches for Solving Real-Options Problems (comment on brandão et al. 2005). *Decision Analysis* 2:89–102. <https://doi.org/10.1287/deca.1050.0041>
- Thomas P, Bratvold RB (2015) A Real Options Approach to the Gas Cap Blowdown Decision. SPE Annual Technical Conference and Exhibition, Houston, TX SPE-174868-MS. <https://doi.org/10.2118/174868-MS>
- Trigeorgis L (1996) *Real Options: Managerial Flexibility and Strategy in Resource Allocation*. MIT Press
- Van Essen G, Zandvliet M, Van den Hof P, et al (2009) Robust Waterflooding Optimization of Multiple Geological Scenarios. *SPE Journal* 14:202–210. <https://doi.org/10.2118/102913-PA>
- Wiersema UF (2008) *Brownian Motion Calculus*. West Sussex, UK: John Wiley & Sons.
- Willigers BJA, Jones B, Bratvold RB (2017) The Net-Present-Value Paradox: Criticized by Many, Applied by All. SPE Economics & Management SPE-187937-PA. <https://doi.org/10.2118/187937-PA>
- Xu L, Sepehrnoori K, Dyer JS, et al (2012) Application of Real Options to Valuations and Decision-making in the Petroleum E&P Industry. SPE Hydrocarbon Economics and Evaluation Symposium, Calgary, ALberta, Canada SPE-162929-MS. <https://doi.org/10.2118/162929-MS>