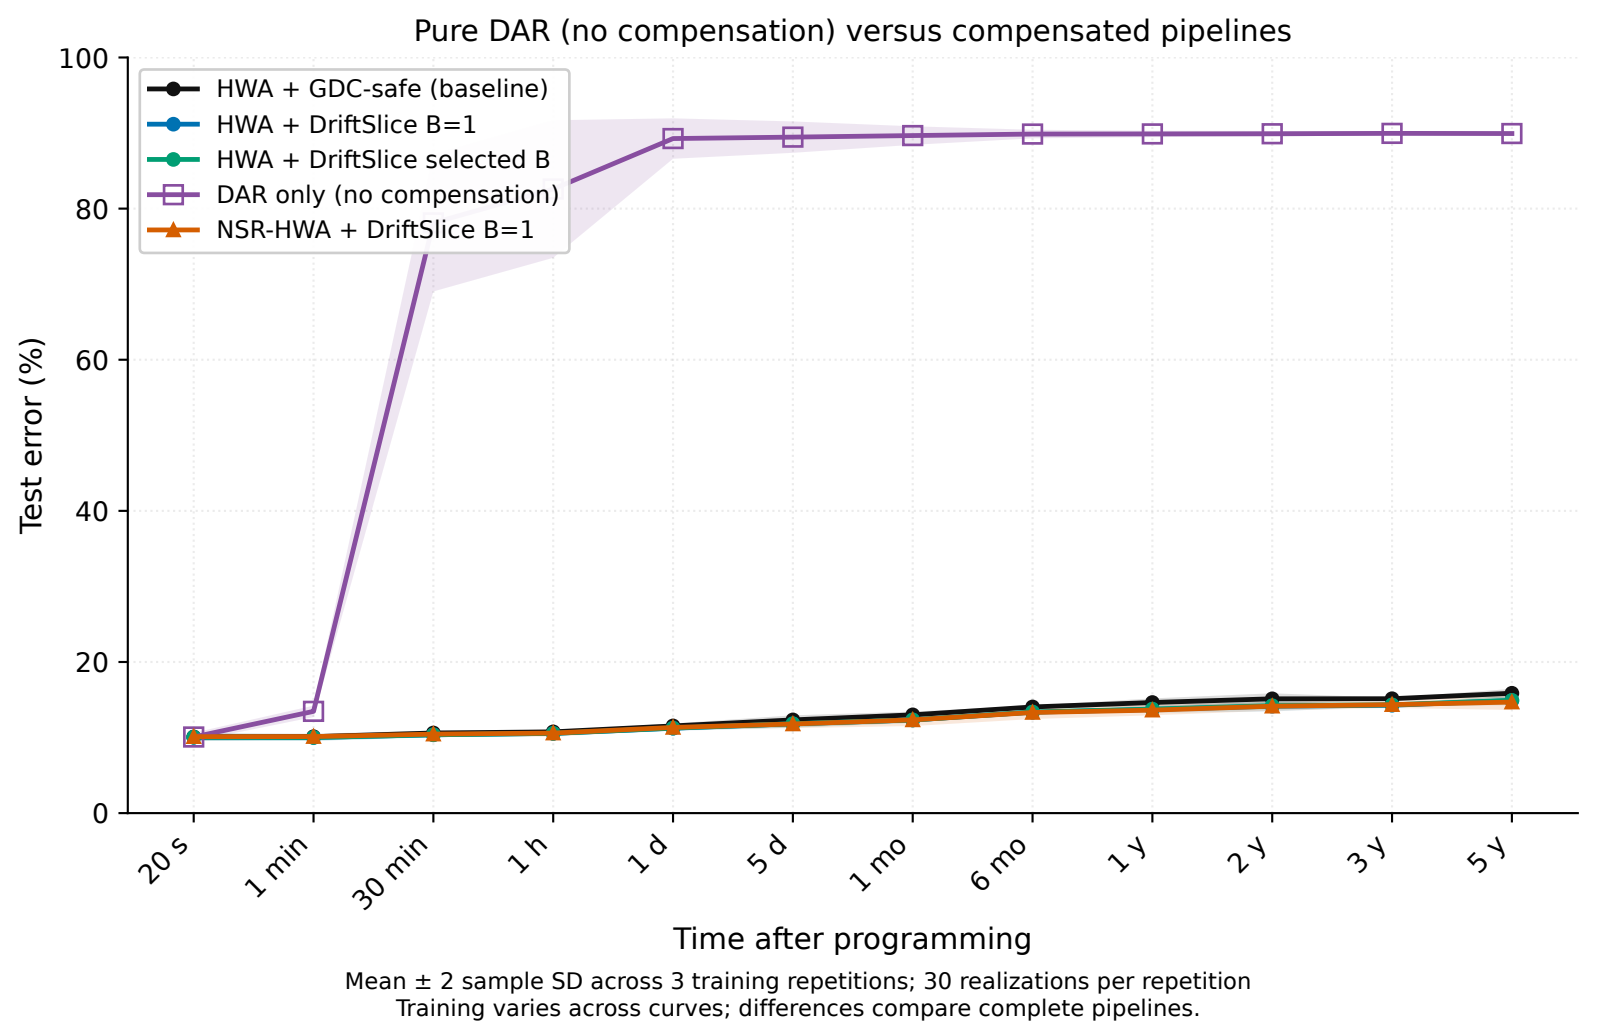
Pure DAR (no compensation) versus compensated pipelines
HWA + GDC-safe (baseline)
HWA + DriftSlice B=1
HWA + DriftSlice selected B
DAR only (no compensation)
NSR-HWA + DriftSlice B=1
Test error (%)
100
80
60
40
20
0
20 s
1 min
30 min
1 h
1 d
5 d
1 mo
6 mo
1 y
2 y
3 y
5 y
Time after programming
Mean ± 2 sample SD across 3 training repetitions; 30 realizations per repetition
Training varies across curves; differences compare complete pipelines.