

Grid-Based Coverage Path Planning with Multiple UAVs for Search and Rescue Applications

by

Welri Botes



*Thesis presented in partial fulfilment of the requirements for
the degree of Master of Engineering (Electrical and
Electronic) in the Faculty of Engineering at Stellenbosch
University*

Supervisor: Dr JAA Engelbrecht

Co-supervisor: Mr JC Schoeman

September 2021

Declaration

By submitting this thesis electronically, I declare that the entirety of the work contained therein is my own, original work, that I am the sole author thereof (save to the extent explicitly otherwise stated), that reproduction and publication thereof by Stellenbosch University will not infringe any third party rights and that I have not previously in its entirety or in part submitted it for obtaining any qualification.

Date: 2021/08/30

Copyright © 2021 Stellenbosch University
All rights reserved.

Abstract

Grid-Based Coverage Path Planning with Multiple UAVs for Search and Rescue Applications

W. Botes

*Department of Electrical and Electronic Engineering,
University of Stellenbosch,
Private Bag X1, Matieland 7602, South Africa.*

Thesis: MEng (EE)

September 2021

Vibrating a tillage tool is an effective way of reducing the draft force required to pull it through the soil. The degree of draft force reduction is dependent on the combination of operating parameters and soil conditions. It is thus necessary to optimize the vibratory implement for different conditions.

Numerical modelling is more flexible than experimental testing and analytical models, and less costly than experimental testing. The Discrete Element Method (DEM) was specifically developed for granular materials such as soils and can be used to model a vibrating tillage tool for its design and optimization. The goal was thus to evaluate the ability of DEM to model a vibratory subsoiler and to investigate the cause of the draft force reduction.

The DEM model was evaluated against data ...

Uittreksel

TODO: Insert Afrikaans Title Here

(“Grid-Based Coverage Path Planning with Multiple UAVs for Search and Rescue Applications”)

W. Botes

*Departement Elektries en Elektroniese Ingenieurswese,
Universiteit van Stellenbosch,
Privaatsak X1, Matieland 7602, Suid Afrika.*

Tesis: MIng (EE)

September 2021

Om ‘n tand implement te vibreer is ‘n effektiewe manier om die trekkrag, wat benodig word om dit deur die grond te trek, te verminder. Die graad van krag vermindering is afhanklik van die kombinasie van werks parameters en die grond toestand. Dus is dit nodig om die vibrerende implement te optimeer vir verskillende omstandighede.

Numeriese modulering is meer buigsaam en goedkoper as eksperimentele opstellings en analitiese modelle. Die Diskrete Element Metode (DEM) was spesifiek vir korrelelike materiaal, soos grond, ontwikkel en kan gebruik word vir die modellering van ‘n vibrerende implement vir die ontwerp en optimering daarvan. Die doel was dus om die vermoë van DEM om ‘n vibrerende skeurploeg te modelleer, te evalueer, en om die oorsaak van die krag vermindering te ondersoek.

Die DEM model was geëvalueer teen data ...

Acknowledgements

I would like to express my sincere gratitude to the following people and organisations ...

Dedications

Hierdie tesis word opgedra aan ...

Contents

Declaration	i
Abstract	ii
Uittreksel	iii
Acknowledgements	iv
Dedications	v
Contents	vi
List of Figures	viii
List of Tables	ix
Nomenclature	x
1 Introduction	1
1.1 Background	1
1.2 Research Aim	3
1.3 Research Objectives	3
1.4 Scope and Limitations	4
1.5 Methodology	4
1.6 Thesis Structure	4
2 Literature Review	5
2.1 Motion Planning	5
2.2 Coverage Path Planning	6
2.3 Single Robot Coverage Path Planning	6
2.4 Multi-Robot Coverage Path Planning	6
2.5 UAVs and Search and Rescue	6
3 Divide Areas Algorithm	7
3.1 Background	7

4	Verifying SatSim Results	8
4.1	Scope	8
5	Hardware Selection	9
5.1	Scope	9
6	Hardware Design with Software Implementation	10
6.1	Scope	10
7	Hardware Verification and Comparison to SatSim	11
7.1	Scope	11
8	Conclusions	12
8.1	Scope	12
	Appendices	13
A	Discrete Element Method Theory	14
A.1	Ball elements	14
	List of References	15

List of Figures

1.1 DroneSAR Mobile Application Showing Coverage Plan[1]	2
A.1 Ball Element Parameters	14

List of Tables

Nomenclature

Constants

$$g = 9.81 \text{ m/s}^2$$

Variables

Re_D	Reynolds number (diameter)	[]
x	Coordinate	[m]
\ddot{x}	Acceleration	[m/s ²]
θ	Rotation angle	[rad]
τ	Moment	[N·m]

Vectors and Tensors

$$\vec{v} \quad \text{Physical vector, see equation ...}$$

Subscripts

a	Adiabatic
a	Coordinate

Chapter 1

Introduction

1.1 Background

Unmanned Aerial Vehicles (UAVs) are a technology that have gained popularity in various applications [2]. Originally, UAVs required a ground pilot to manoeuvre them, but are becoming an increasingly automated technology. Applications where UAV automation has been used include, but are not limited to, structure inspections[3], smart farming[4], disaster management[5], power line inspections[6], surveillance[7] and wildfire tracking[8].

Most of the research mentioned was done on the premise of using multi-rotor UAVs, quad-rotor vehicles in particular. It is important to note that the term UAVs also encompasses other aircraft types, like single rotor and fixed wing UAVs. Hybrids also exist that contain both rotary-wing and fixed-wing components[2].

Using UAVs poses a considerable advantage in applications like the ones mentioned when compared to unmanned ground vehicles (UGVs). Their capacity to fly over landscapes and around three dimensional structures makes their potential applications increase substantially. Relatively high altitude flying is a key reason why they are well suited to the application suggested in this paper, which is automated coverage path planning for search and rescue missions.

According to [9], the purpose of motion planning algorithms are determined by the field of research. In control theory, it refers to algorithms that are designed to find trajectories for agents within a nonlinear system. This contrasts with the usual focus of control theory on feedback and optimization because the trajectories are usually computed using open-loop methods. Motion planning takes on a subtly different meaning in the world of robotics or artificial intelligence, but the control theory definition is the one that will be used throughout this text.

Coverage path planning (CPP) is a variant of the general motion planning problem. Originally, motion planning algorithms were predominantly used to

find solutions for start-goal problems[10]. This could mean getting an agent, a UAV for example, from some starting position to some goal position in an environment[11]. Coverage path planning is different from start-goal path planning in that it tries to determine a path for an agent to pass over all points in an environment[10]. It can be used with ground vehicles, for example, to automate field machines for smart farming[12]. Further examples include vacuum cleaning robots, spray painting robots[13], window cleaning robots[14] and automated lawn mowers[15]. For underwater vehicles it can be used for the inspection of difficult to reach underwater structures[16].

Furthermore, there have been developments in the use of UAVs to perform automated search and rescue operations using coverage path planning. Perhaps the most notable example is a project by DroneSAR where they use DJI drones to perform search and rescue tasks. Their implementation includes a mobile application that allows the user to designate a search area manually[1]. Search and rescue operations often span large areas and UAVs fly above most ground obstacles. Therefore, it is realistic that they assume the search environment can be mapped prior to the search operation[17].

DroneSAR uses one drone per search and rescue operation. Once the environment has been designated, the drone performs a back and forth maneuver across the area to achieve coverage. The search operation can be halted if the imaging system detects a possible target in the area. The drone can be switched to manual flight mode for closer inspection and the co-ordinates of the target, for example a person in turmoil, can be sent to the search and rescue team. Their system also allows for the manual assignment of way-points to a flight path to bypass the back and forth maneuver.[18]

In figure 1.1, a screenshot of their mobile application is shown. It illustrates the back and forth maneuver used to achieve coverage of the designated area.

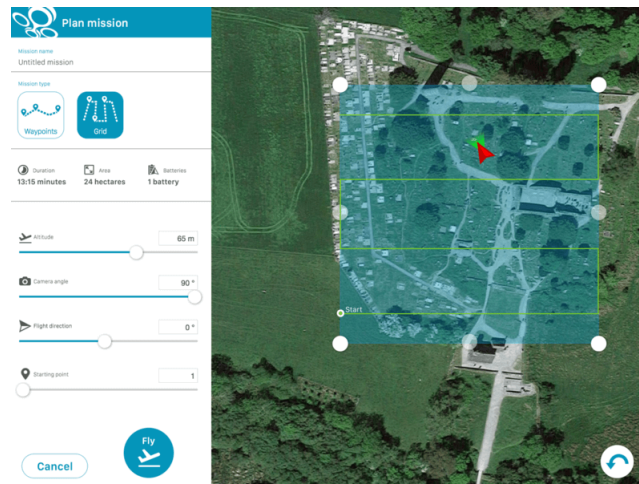


Figure 1.1: DroneSAR Mobile Application Showing Coverage Plan[1]

This paper also looks at coverage path planning for search and rescue, but suggests a multiple UAV approach to the problem. According to [1], when looking for a victim in one square kilometer on land, it takes a five-person rescue team two hours on average to find the victim. DroneSAR found that their drone could do the same job in under 20 minutes. Adding multiple UAVs to cover an area could reduce this time even more, since it would mean more area is covered per unit time. This is important because in a search and rescue operation, time is always of the essence.

This paper also focuses on a grid-based approach to the coverage problem. According to the taxonomy represented in [10], this is referred to as an approximate method. Although one can achieve complete coverage of the grid, the grid itself is not an exact representation of the environment. It does, however, greatly simplify the process of allocating areas to different UAVs, which is a key process for multiple UAV coverage. Physical implementation of this method will not be addressed as part of the scope for this paper.

1.2 Research Aim

The main goal of this research is to develop a coverage path planning algorithm for multiple unmanned aerial vehicles (UAVs) to search an area. The research is intended to be applicable in search and rescue operations using unmanned aerial vehicles to assist.

1.3 Research Objectives

Based on the main aim of this project set out in section 1.2, a set of research objectives were formulated. These are intended to give a clearer picture of the main research goals and scope of the project. Scope and limitations are further discussed in section 1.4 and the methodology used to achieve these objectives are detailed in section 1.5. The research objectives are as follows:

1. Develop a coverage path planning algorithm for an environment that is known a priori and contains static obstacles.
2. Ensure that the final algorithm is an approximately complete solution.
3. Incorporate into the algorithm's functionality an ability to have a changing number of starting UAVs that have random initial positions.
4. Evaluate the algorithm's performance in both randomly generated and mapped, real world environments to ascertain whether or not it is suitable for search and rescue operations.

1.4 Scope and Limitations

1.5 Methodology

1.6 Thesis Structure

Chapter 2

Literature Review

As mentioned in section 1.1, coverage path planning is a subset of the general motion planning problem. Therefore, to understand CPP one must first understand motion planning. This chapter will therefore begin with a brief overview of motion planning before moving on to a more detailed review of CPP literature. Beyond that, it presents an overview of literature regarding UAVs and their applications in Search and Rescue.

2.1 Motion Planning

Perhaps one of the most notable items of literature presented on motion planning is [9]. This book refers to planning algorithms as a strategy that is used by one or more decision makers to move from some starting state to some goal state. They often refer to the user of the algorithm as a *decision maker*. Another popular term, which is taken from the field of artificial intelligence is the term *agent*, which will be the term used throughout this text..

2.2 Coverage Path Planning

2.3 Single Robot Coverage Path Planning

2.3.1 A-Star

2.3.2 STC

2.4 Multi-Robot Coverage Path Planning

2.4.1 Divide Areas Algorithm

2.4.2 MSTC/MFC

2.5 UAVs and Search and Rescue

2.5.1 Rotary-Wing UAVs

2.5.1.1 DroneSAR

2.5.2 Fixed-Wing UAVs

Chapter 3

Divide Areas Algorithm

3.1 Background

Chapter 4

Verifying SatSim Results

4.1 Scope

In granular or particle flow simulations with Discrete Element Method (DEM), the mechanical behavior of a system of particles are simulated. The basic building blocks of DEM are finite sized particles and walls. It is generally classified into two basically different approaches.

The first is the “hard sphere”, event-driven method, where particles are assumed to be perfectly rigid and they follow an undisturbed motion until a collision occurs. Due to the rigidity of the interaction, the collisions occur instantaneously with accompanying momentum transfer. It is mainly used for collisional, dissipative granular gases.

The second is the so-called “soft particle” molecular dynamics pioneered by each other. Constrains on the physical space that a particle can occupy at a specific time is included with contact or penalty forces related to the amount of overlap and contact velocity between particles or between particles and walls. The motion of the system is modelled by the integration of Newton-Euler equations for motion of every individual particle.

Chapter 5

Hardware Selection

5.1 Scope

In granular or particle flow simulations with Discrete Element Method (DEM), the mechanical behavior of a system of particles are simulated. The basic building blocks of DEM are finite sized particles and walls. It is generally classified into two basically different approaches.

The first is the “hard sphere”, event-driven method , where particles are assumed to be perfectly rigid and they follow an undisturbed motion until a collision occurs. Due to the rigidity of the interaction, the collisions occur instantaneously with accompanying momentum transfer. It is mainly used for collisional, dissipative granular gases.

The second is the so-called “soft particle” molecular dynamics pioneered by each other. Constrains on the physical space that a particle can occupy at a specific time is included with contact or penalty forces related to the amount of overlap and contact velocity between particles or between particles and walls. The motion of the system is modelled by the integration of Newton-Euler equations for motion of every individual particle.

Chapter 6

Hardware Design with Software Implementation

6.1 Scope

In granular or particle flow simulations with Discrete Element Method (DEM), the mechanical behavior of a system of particles are simulated. The basic building blocks of DEM are finite sized particles and walls. It is generally classified into two basically different approaches.

The first is the “hard sphere”, event-driven method , where particles are assumed to be perfectly rigid and they follow an undisturbed motion until a collision occurs. Due to the rigidity of the interaction, the collisions occur instantaneously with accompanying momentum transfer. It is mainly used for collisional, dissipative granular gases.

The second is the so-called “soft particle” molecular dynamics pioneered by each other. Constrains on the physical space that a particle can occupy at a specific time is included with contact or penalty forces related to the amount of overlap and contact velocity between particles or between particles and walls. The motion of the system is modelled by the integration of Newton-Euler equations for motion of every individual particle.

Chapter 7

Hardware Verification and Comparison to SatSim

7.1 Scope

In granular or particle flow simulations with Discrete Element Method (DEM), the mechanical behavior of a system of particles are simulated. The basic building blocks of DEM are finite sized particles and walls. It is generally classified into two basically different approaches.

The first is the “hard sphere”, event-driven method where particles are assumed to be perfectly rigid and they follow an undisturbed motion until a collision occurs. Due to the rigidity of the interaction, the collisions occur instantaneously with accompanying momentum transfer. It is mainly used for collisional, dissipative granular gases.

The second is the so-called “soft particle” molecular dynamics pioneered by each other. Constrains on the physical space that a particle can occupy at a specific time is included with contact or penalty forces related to the amount of overlap and contact velocity between particles or between particles and walls. The motion of the system is modelled by the integration of Newton-Euler equations for motion of every individual particle.

Chapter 8

Conclusions

8.1 Scope

In granular or particle flow simulations with Discrete Element Method (DEM), the mechanical behavior of a system of particles are simulated. The basic building blocks of DEM are finite sized particles and walls. It is generally classified into two basically different approaches.

The first is the “hard sphere”, event-driven method where particles are assumed to be perfectly rigid and they follow an undisturbed motion until a collision occurs. Due to the rigidity of the interaction, the collisions occur instantaneously with accompanying momentum transfer. It is mainly used for collisional, dissipative granular gases.

The second is the so-called “soft particle” molecular dynamics pioneered by where the particles are allowed to overlap or penetrate each other. Constrains on the physical space that a particle can occupy at a specific time is included with contact or penalty forces related to the amount of overlap and contact velocity between particles or between particles and walls. The motion of the system is modelled by the integration of Newton-Euler equations for motion of every individual particle.

Appendices

Appendix A

Discrete Element Method Theory

A.1 Ball elements

A.1.1 Ball mass and inertia parameters

Consider a volume element dV with respect to a static base S of an arbitrary solid body with density ρ . The mass of the body is obtained by integrating over the volume of the body,

$$m = \int_{\text{body}} \rho dV \quad (\text{A.1})$$

In figure A.1, a ball with radius R_i and uniform density ρ_i is depicted. The mass of the ball is after integration of equation (A.1)

$$m_i = \frac{4}{3}\pi\rho_i R_i^3. \quad (\text{A.2})$$

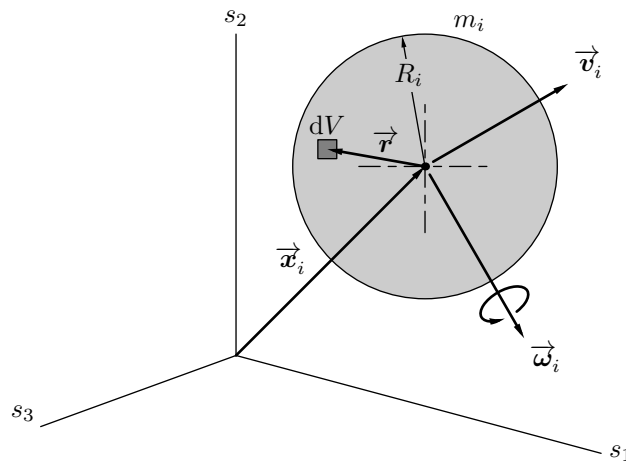


Figure A.1: Ball Element Parameters

List of References

- [1] “DJI And DroneSAR Bring Search And Rescue App To First Responders,” nov 2016. [Online]. Available: <https://www.dji.com/ie/newsroom/news/dji-and-dronesar-bring-search-and-rescue-app-to-first-responders>
- [2] T. M. Cabreira, L. B. Brisolara, and R. Ferreira Paulo, “Survey on coverage path planning with unmanned aerial vehicles,” *MDPI*, 2019.
- [3] J. A. Guerrero and Y. Bestaoui, “UAV path planning for structure inspection in windy environments,” *Journal of Intelligent and Robotic Systems: Theory and Applications*, 2013.
- [4] P. Lottes, R. Khanna, J. Pfeifer, R. Siegwart, and C. Stachniss, “UAV-based crop and weed classification for smart farming,” *Proceedings - IEEE International Conference on Robotics and Automation*, 2017.
- [5] I. Maza, F. Caballero, J. Capitán, J. R. Martínez-De-Dios, and A. Ollero, “Experimental results in multi-UAV coordination for disaster management and civil security applications,” *Journal of Intelligent and Robotic Systems: Theory and Applications*, 2011.
- [6] W. Chang, G. Yang, J. Yu, Z. Liang, L. Cheng, and C. Zhou, “Development of a power line inspection robot with hybrid operation modes,” *IEEE International Conference on Intelligent Robots and Systems*, 2017.
- [7] N. Basilico and S. Carpin, “Deploying teams of heterogeneous UAVs in co-operative two-level surveillance missions,” *IEEE International Conference on Intelligent Robots and Systems*, 2015.
- [8] H. X. Pham, H. M. La, D. Feil-Seifer, and M. Deans, “A distributed control framework for a team of unmanned aerial vehicles for dynamic wildfire tracking,” *IEEE International Conference on Intelligent Robots and Systems*, 2017.
- [9] S. M. Lavalle, *Planning Algorithms*. Cambridge University Press, 2006. [Online]. Available: <http://planning.cs.uiuc.edu/>
- [10] H. Choset, “Coverage for robotics - A survey of recent results,” *Annals of Mathematics and Artificial Intelligence*, 2001.
- [11] K. K. M. Lynch and F. C. Park, *Modern robotics : mechanics, planning, and control*. Cambridge University Press, 2017.

- [12] I. A. Hameed, “Intelligent coverage path planning for agricultural robots and autonomous machines on three-dimensional terrain,” *Journal of Intelligent and Robotic Systems: Theory and Applications*, 2013.
- [13] P. N. Atkar, A. Greenfield, D. C. Conner, H. Choset, and A. A. Rizzi, “Uniform coverage of automotive surface patches,” *International Journal of Robotics Research*, 2005.
- [14] N. Mir-Nasiri, J. Hudyjaya Siswoyo, and M. H. Ali, “Portable Autonomous Window Cleaning Robot,” *Procedia Computer Science*, 2018. [Online]. Available: <https://doi.org/10.1016/j.procs.2018.07.024>
- [15] E. M. Arkin, S. P. Fekete, and J. S. Mitchell, “Approximation algorithms for lawn mowing and milling,” *Computational Geometry: Theory and Applications*, 1999.
- [16] B. Englot and F. S. Hover, “Sampling-based coverage path planning for inspection of complex structures,” *ICAPS 2012 - Proceedings of the 22nd International Conference on Automated Planning and Scheduling*, pp. 29–37, 2012.
- [17] E. Galceran and M. Carreras, “A survey on coverage path planning for robotics,” *Robotics and Autonomous Systems*, 2013.
- [18] O. McGrath, “Are UAVs the future of search and rescue?” *HEMS/SAR*, no. 92, 2018. [Online]. Available: <https://www.airmedandrescue.com/latest/long-read/are-uavs-future-search-and-rescue>