

PRODUCT

产品名称

MODEL NO.

模块型号

CS43D40002***

Customer Type

客户项目型号

SUPPLIER

供应商

DATE 日期

SPECIFICATION.

样品承认书

供方确认		客户确认	
工程部（签章）		电子工程师（签章）	
制造部（签章）		结构工程师（签章）	
		项目经理（签章）	
品质部（签章）		品质部（签章）	
核准（签章）		核准（签章）	
确认結果 ☐ 合格 ☐ 不合格			

■ REVISION RECORD

修改记录

[illegible]

■ GENERAL INFORMATION

主要特征描述

No.	Item	Specification	Unit	Remark
1		4.3	inch	-
2		TFT	-	-
3		800 x (RGB) x480	pixel	-
4		Normally Black	-	-
5		ALL 0° clock	-	-
6		1500(Typ)	-	-
7		250(Typ) 1300(Typ)	cd/m ²	Note 1
8	RTP+	190(Typ) 950(Typ)	cd/m ²	Note 1
9		200(Typ) 1050(Typ)	cd/m ²	Note 1
10		105.50(L) x67.20(W) x 3.0(T)	mm	-
11	RTP+	105.50(L) x67.20(W) x 4.2(T)	mm	-
12	CTP+	105.50(L) x67.20(W) x 4.73(T)	mm	-
13		95.04(W) x 53.86(L)	mm	-
14	IC	ST7262		
15		TTL	-	-
16		-20~70	°C	-
17		-30~80	°C	-

Note 1 : 7 If=20mA Vf=21V
 16 8 2 If=40mA Vf=24

LCM

Front View Dimensions:

- Overall Width: 105.50 ± 0.2 (LCM, 00)
- Panel Width: 96.80 ± 0.15 (LCM, VA)
- Panel Height: 96.40 ± 0.2 (POL)
- Bezel Width: 95.84 (LCD, AA)
- Top Bezel: 3.28
- Bottom Bezel: 4.32
- Left Bezel: 53.86 (LCD, AA)
- Right Bezel: 55.70 ± 0.2 (POL)
- Overall Height: 67.20 ± 0.2 (LCM, 00)
- Panel Thickness: 19.12 ± 0.5
- Mounting Hole: 3.50 ± 0.3
- Mounting Hole Spacing: 20.50 ± 0.1
- Mounting Hole Diameter: 0.35
- Mounting Hole Position: P0.5° 39=19.50 ± 0.06

Side View Dimensions:


- Module Thickness: 3.00 ± 0.2
- Mounting Hole Position: 0.30 ± 0.03
- Mounting Hole Diameter: 0.35
- Mounting Hole Position: 20.50 ± 0.1
- Mounting Hole Diameter: 0.35
- Mounting Hole Position: P0.5° 39=19.50 ± 0.06

Pin List:

PIN	SYMBOL
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

	PIN, SWBLE
1	VIED-
2	WEDH-
3	GND
4	VDD
5	HO
6	FO
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	Q9
14	Q1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	KR
38	TD
39	XL
40	YU

模组+RTP外形尺寸

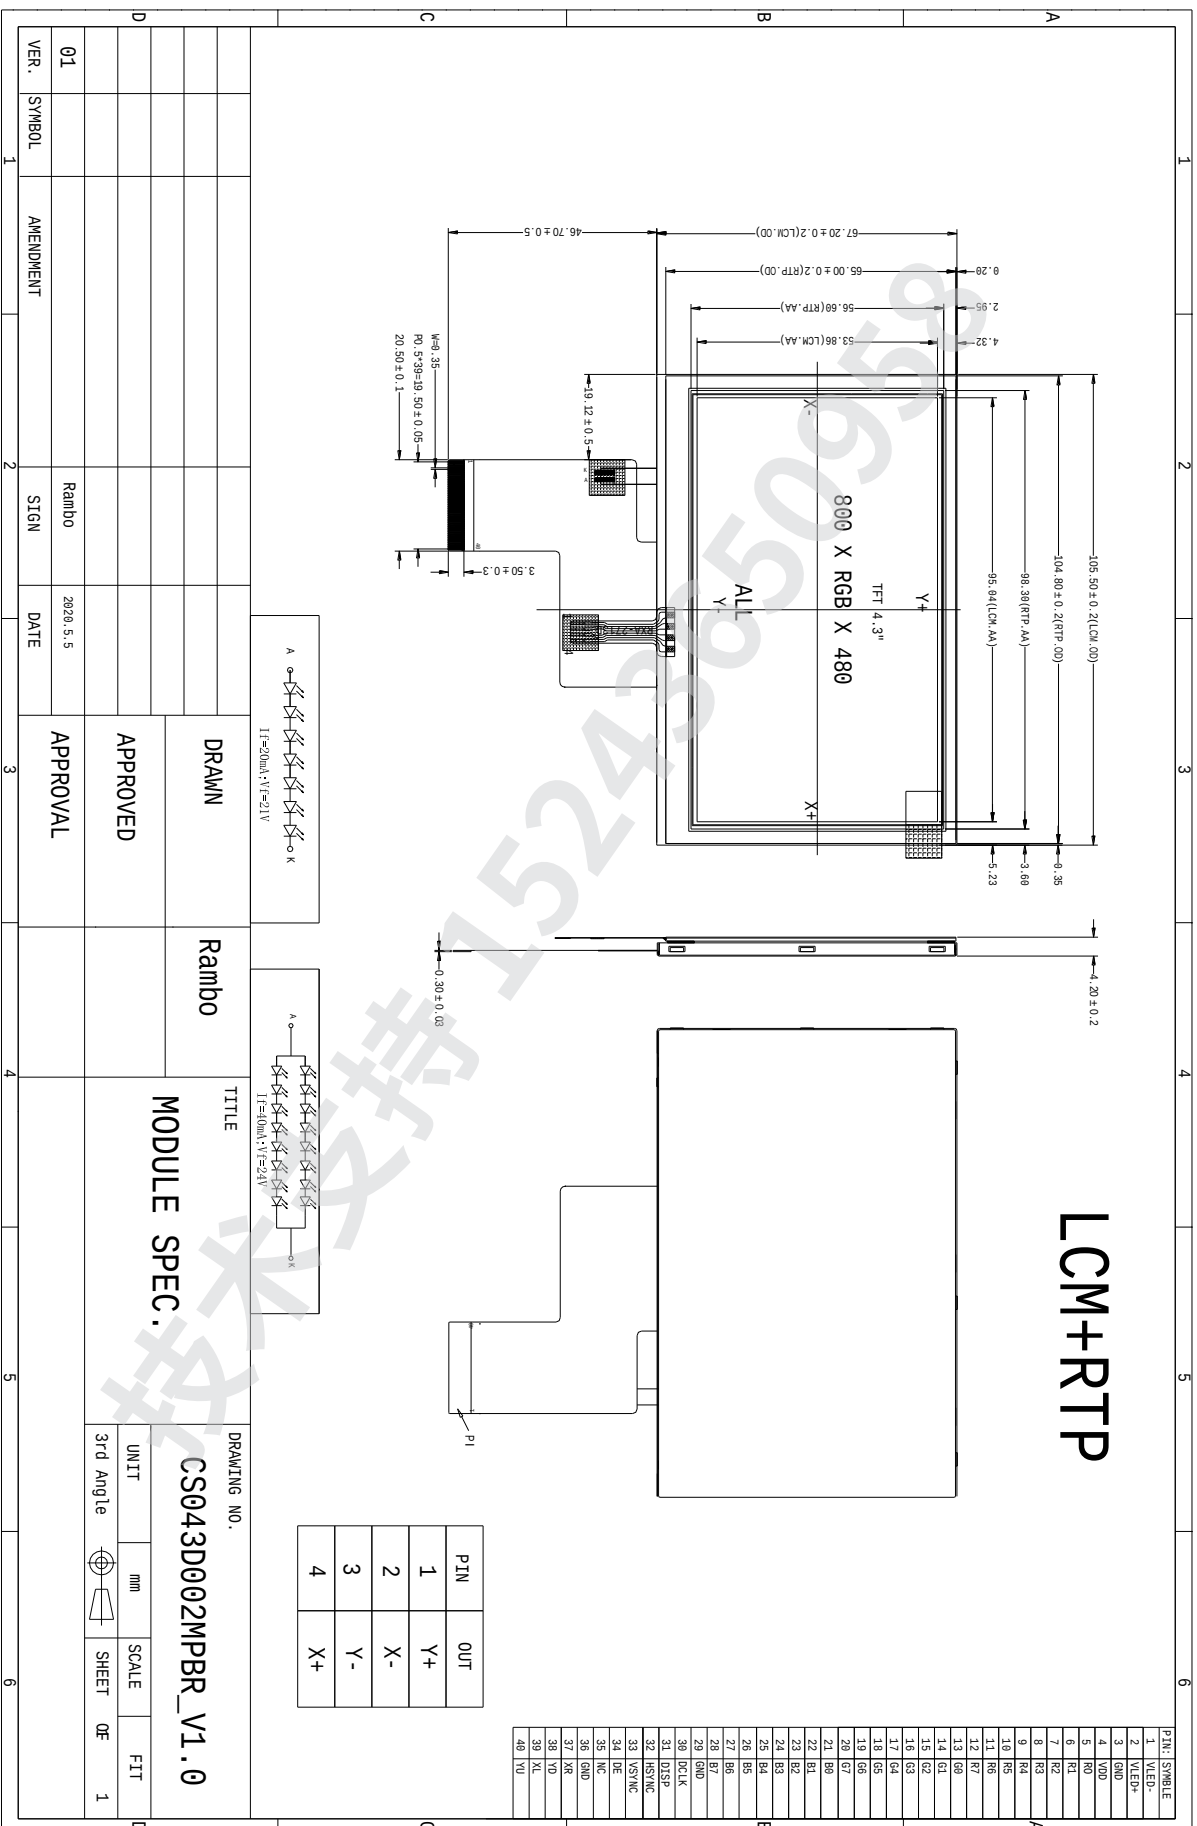

[illegible]

极限参数

Parameter of absolute maximum ratings	Symbol	Min	Max	Unit


模块电气特性

直流特性

[illegible]


Item	Symbol	Condition	Temp	Min	Typ	Max	Units	Note
Transmittance	T		—	3.78	4.45	—	%	—
Response Time	Rise Time (Tr)	$\theta = \psi = 0$	-10°C	—	—	—	msec	73
	Decay Time (Td)			—	—	—		
	(Tr+Td)		25°C	—	25	40		
	Rise Time (Tr)		60°C	—	—	—		
	Decay Time (Td)			—	—	—		
Viewing Angle Range	θ	$\psi = 0^\circ$	25°C	—	80	—	Deg	74
		$\psi = 90^\circ$		—	80	—		
		$\psi = 180^\circ$		—	80	—		
		$\psi = 270^\circ$		—	80	—		
Contrast Ratio	Cr	$\theta = \psi = 0$	25°C	1000	1500	—	—	75

7.1 ELECTRO-OPTICAL CHARACTERISTICS TEST METHOD

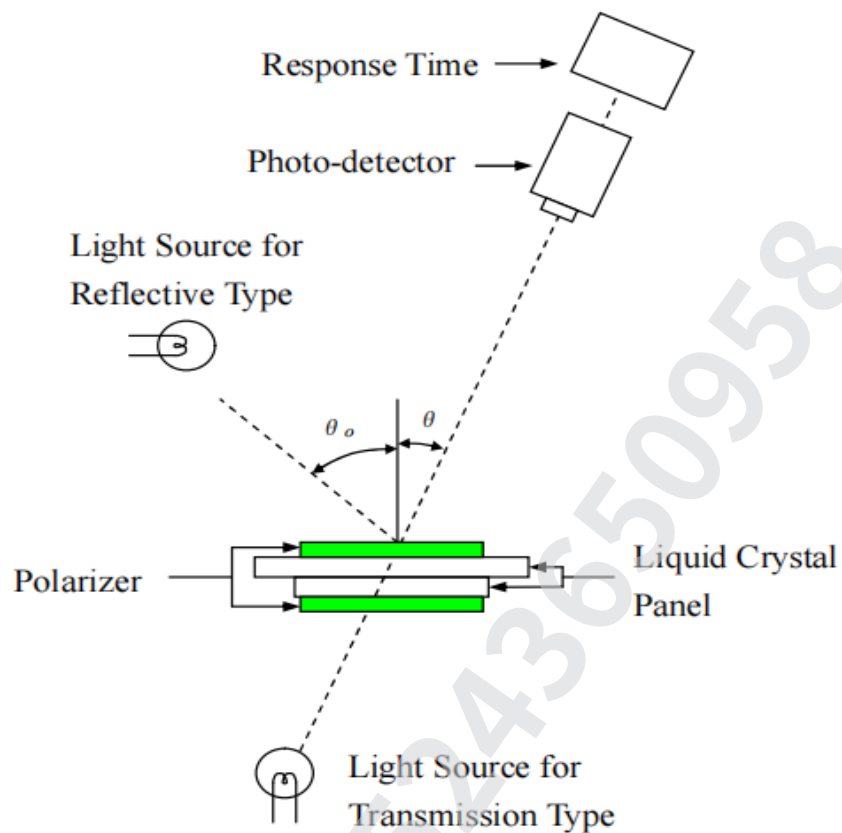


DEFINITION OF OPERATING VOLTAGE, VOP


$$V_{op} = (V_{10,ON} + V_{90,OFF})/2$$

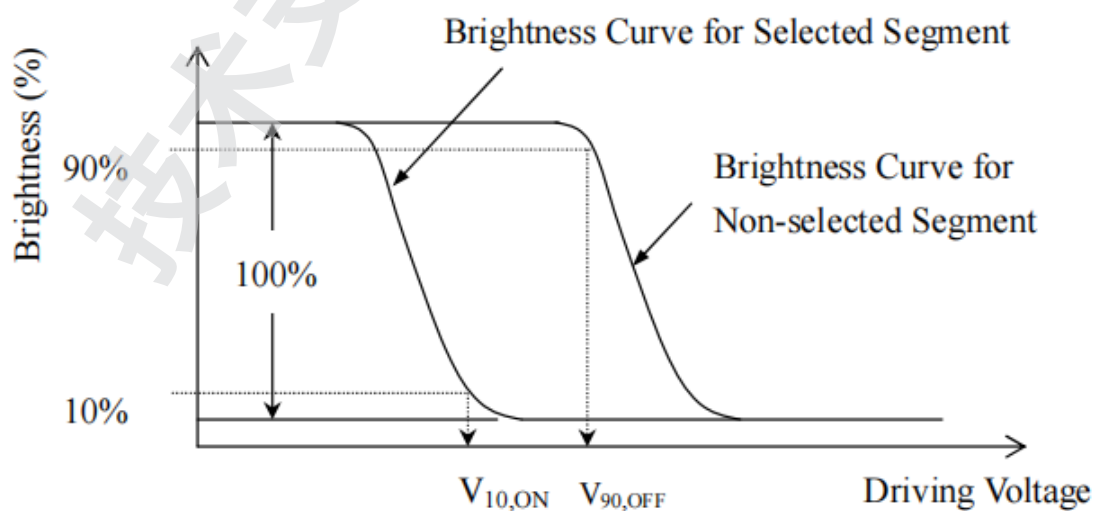

DEFINITION OF OPTICAL RESPONSE TIME

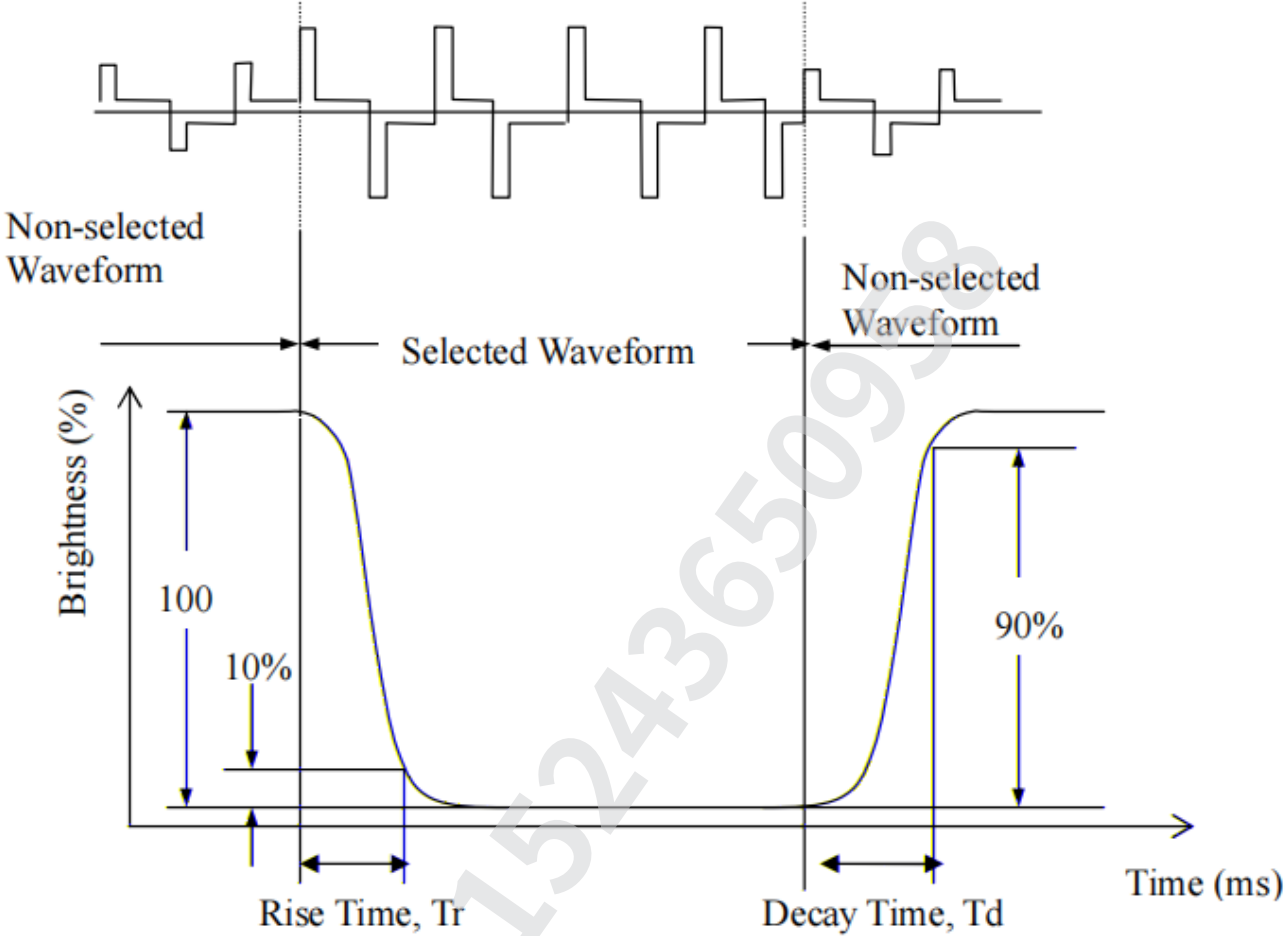


DEFINITION OF VIEWING ANGLE θ AND

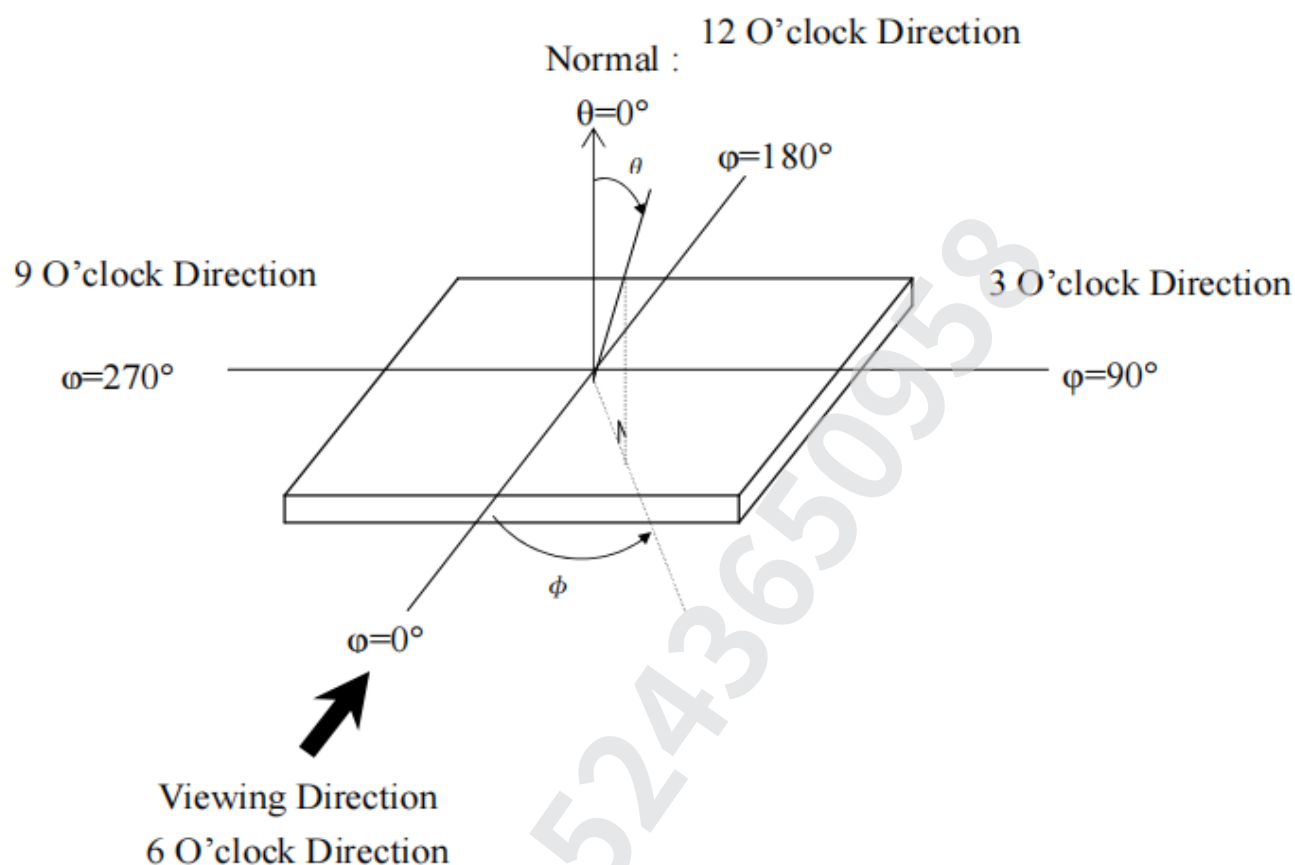

DEFINITION OF CONTRAST RATIO, CR

$$CR = \frac{\text{Brightness of Non-selected Segment (B2)}}{\text{Brightness of Selected Segment (B1)}}$$

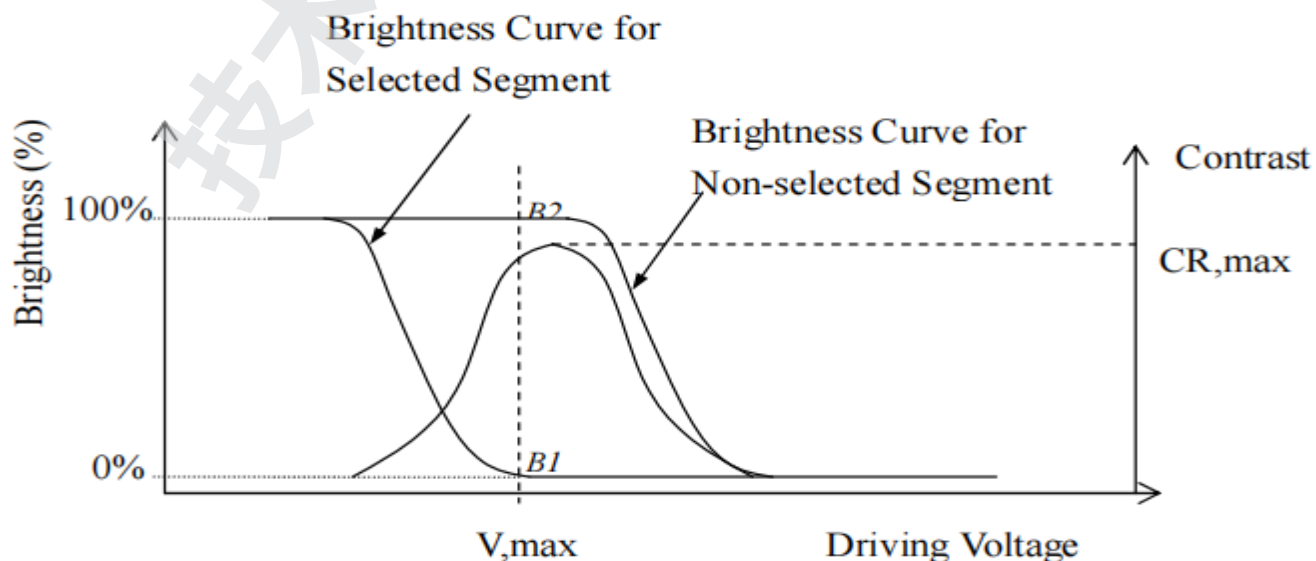


■ TIMING CHARACTERISTICSS


时序特性

Item		Symbol	Values			Unit	Remark
			Min.	Typ.	Max.		
DCLK Frequency		Fclk	23	25	27	MHz	
Hsync	Period time	Th	808	816	896	DCLK	
	Display Period	Thdisp	-	800	-	DCLK	
	Back Porch	Thbp	4	8	48	DCLK	
	Front Porch	Thfp	8	4	8	DCLK	
Vsync	Period time	Tv	488	496	504	H	
	Display Period	Tvdisp	-	480	-	H	
	Back Porch	Tvbp	4	8	12	H	
	Front Porch	Tvfp	2	4	8	H	


SYNC Mode

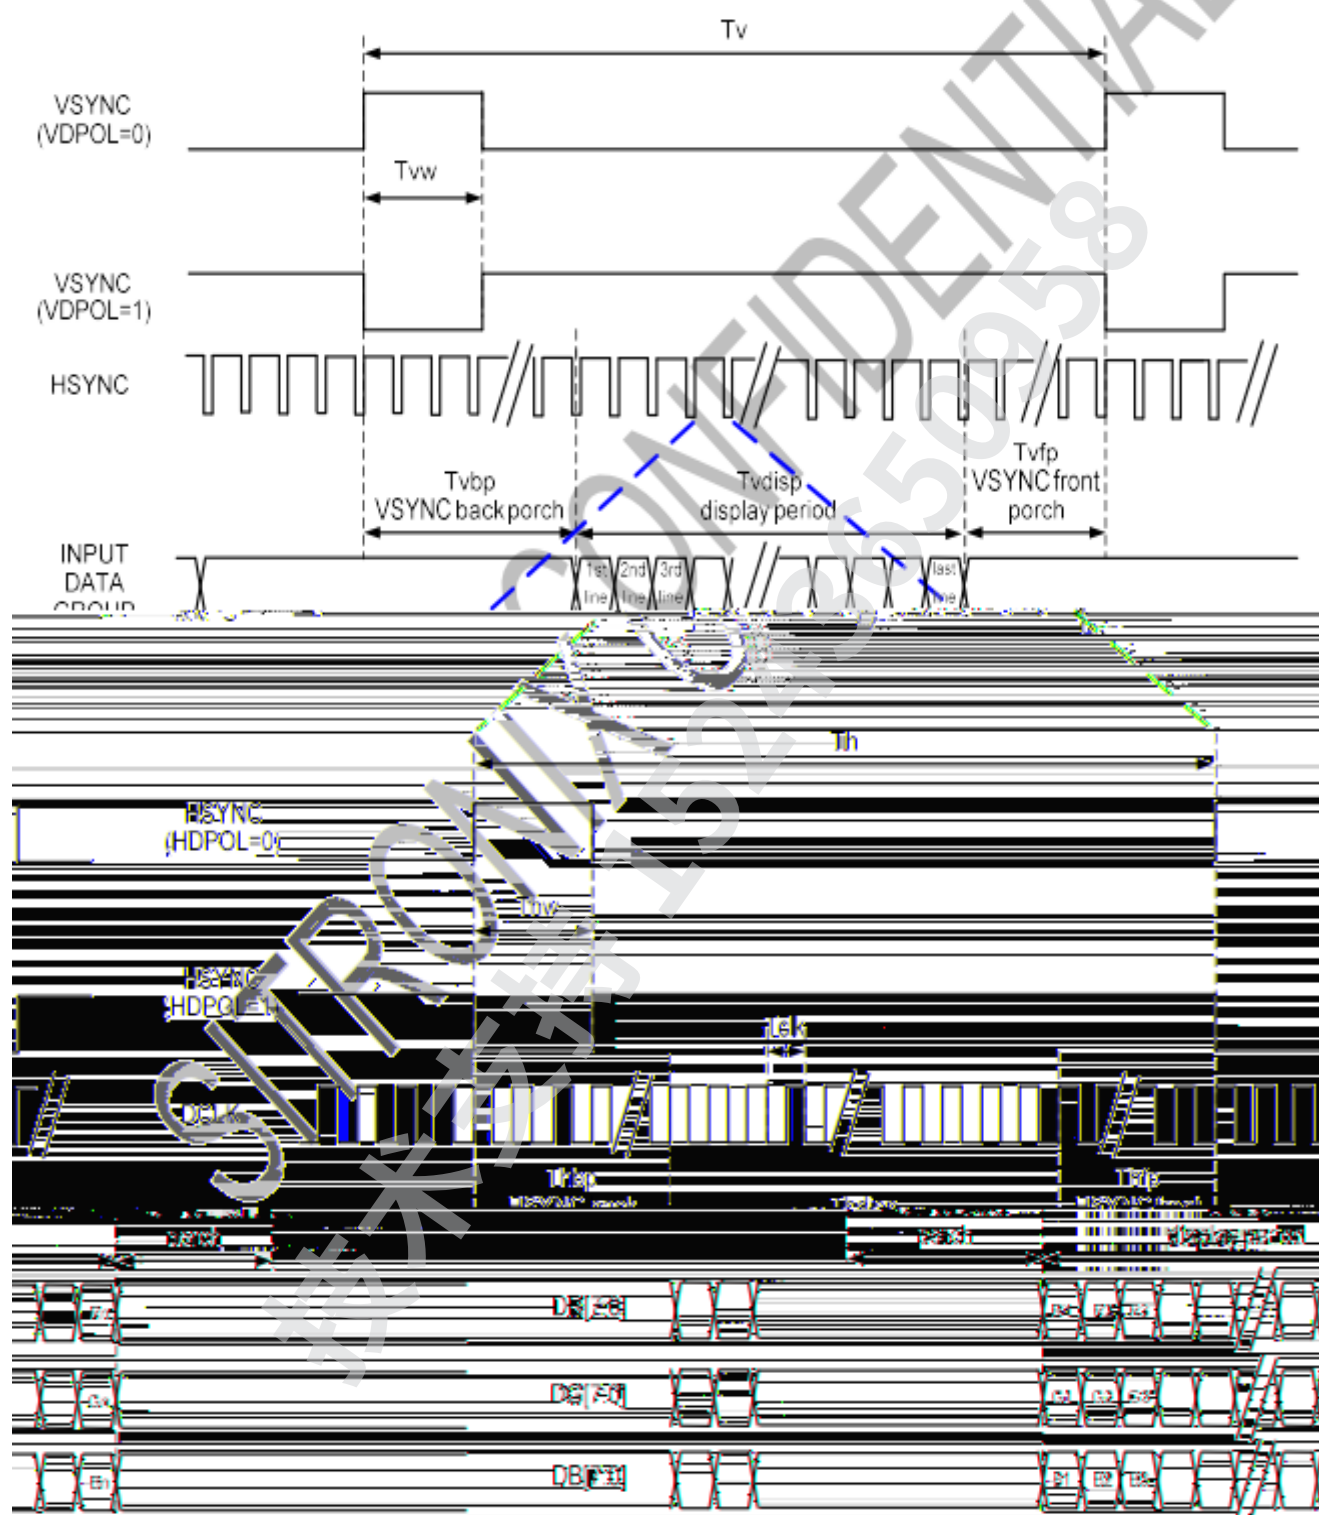


DE Mode

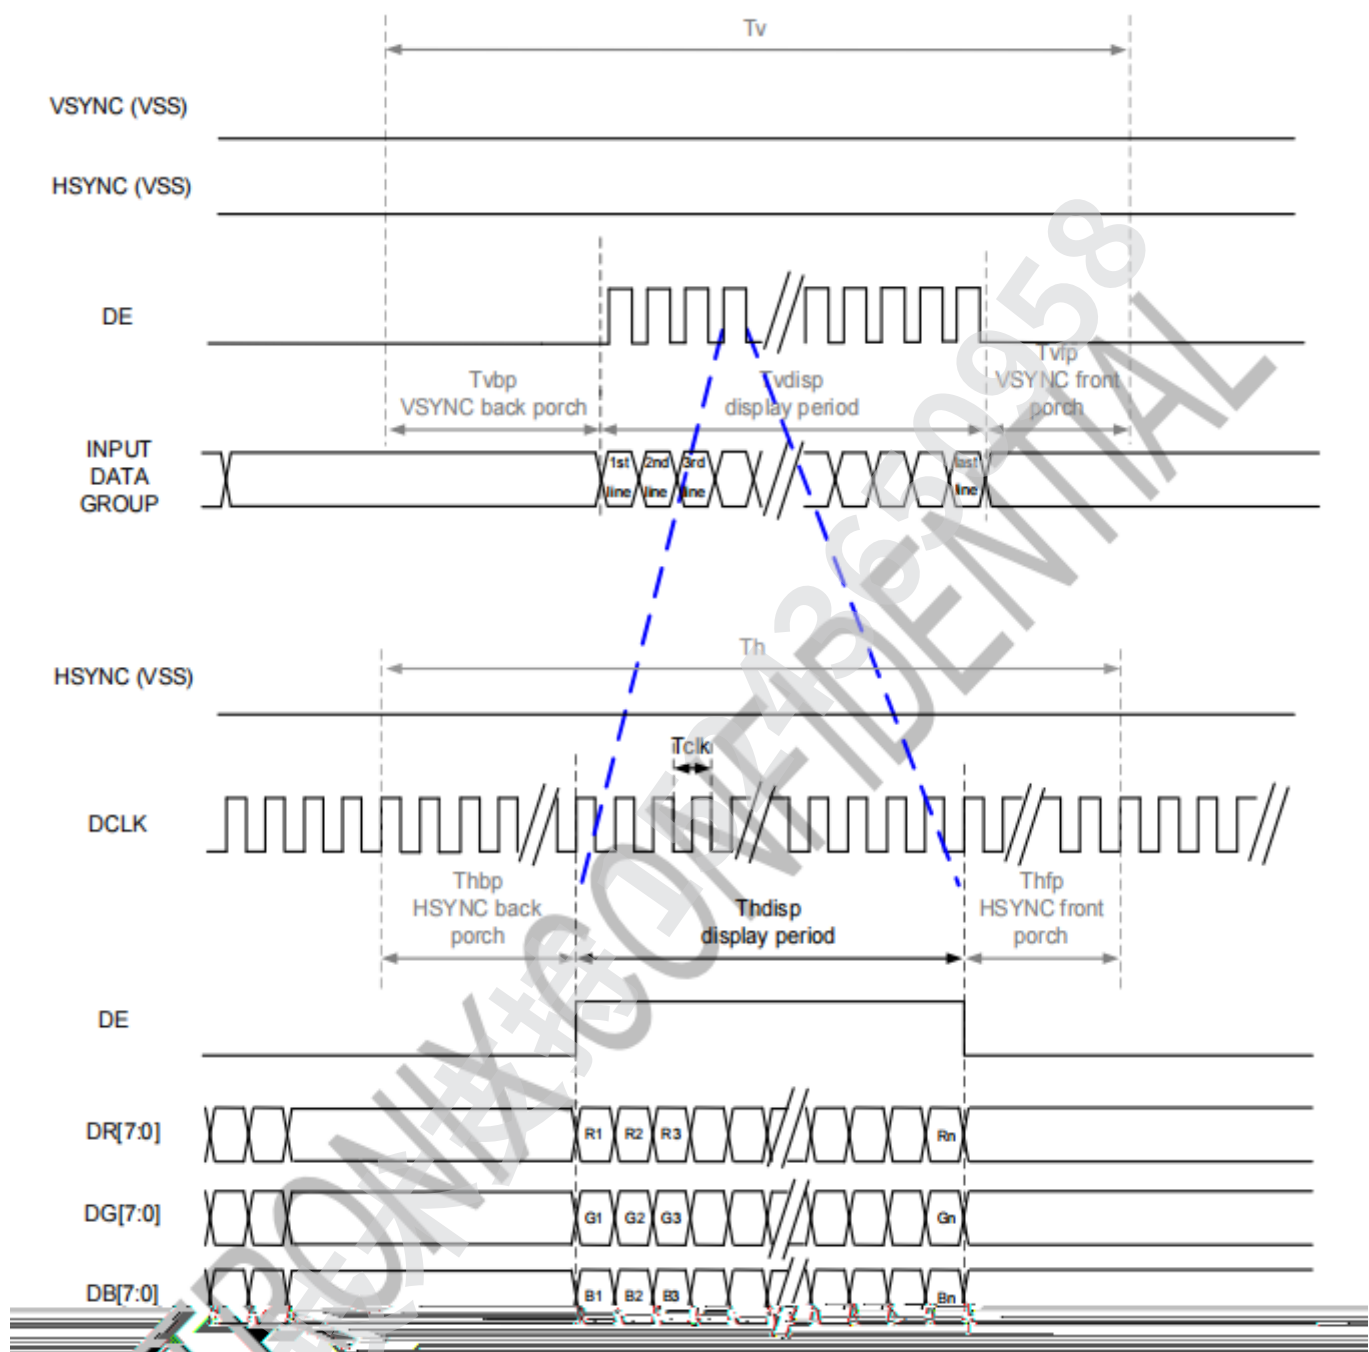


SYNC-DE Mode

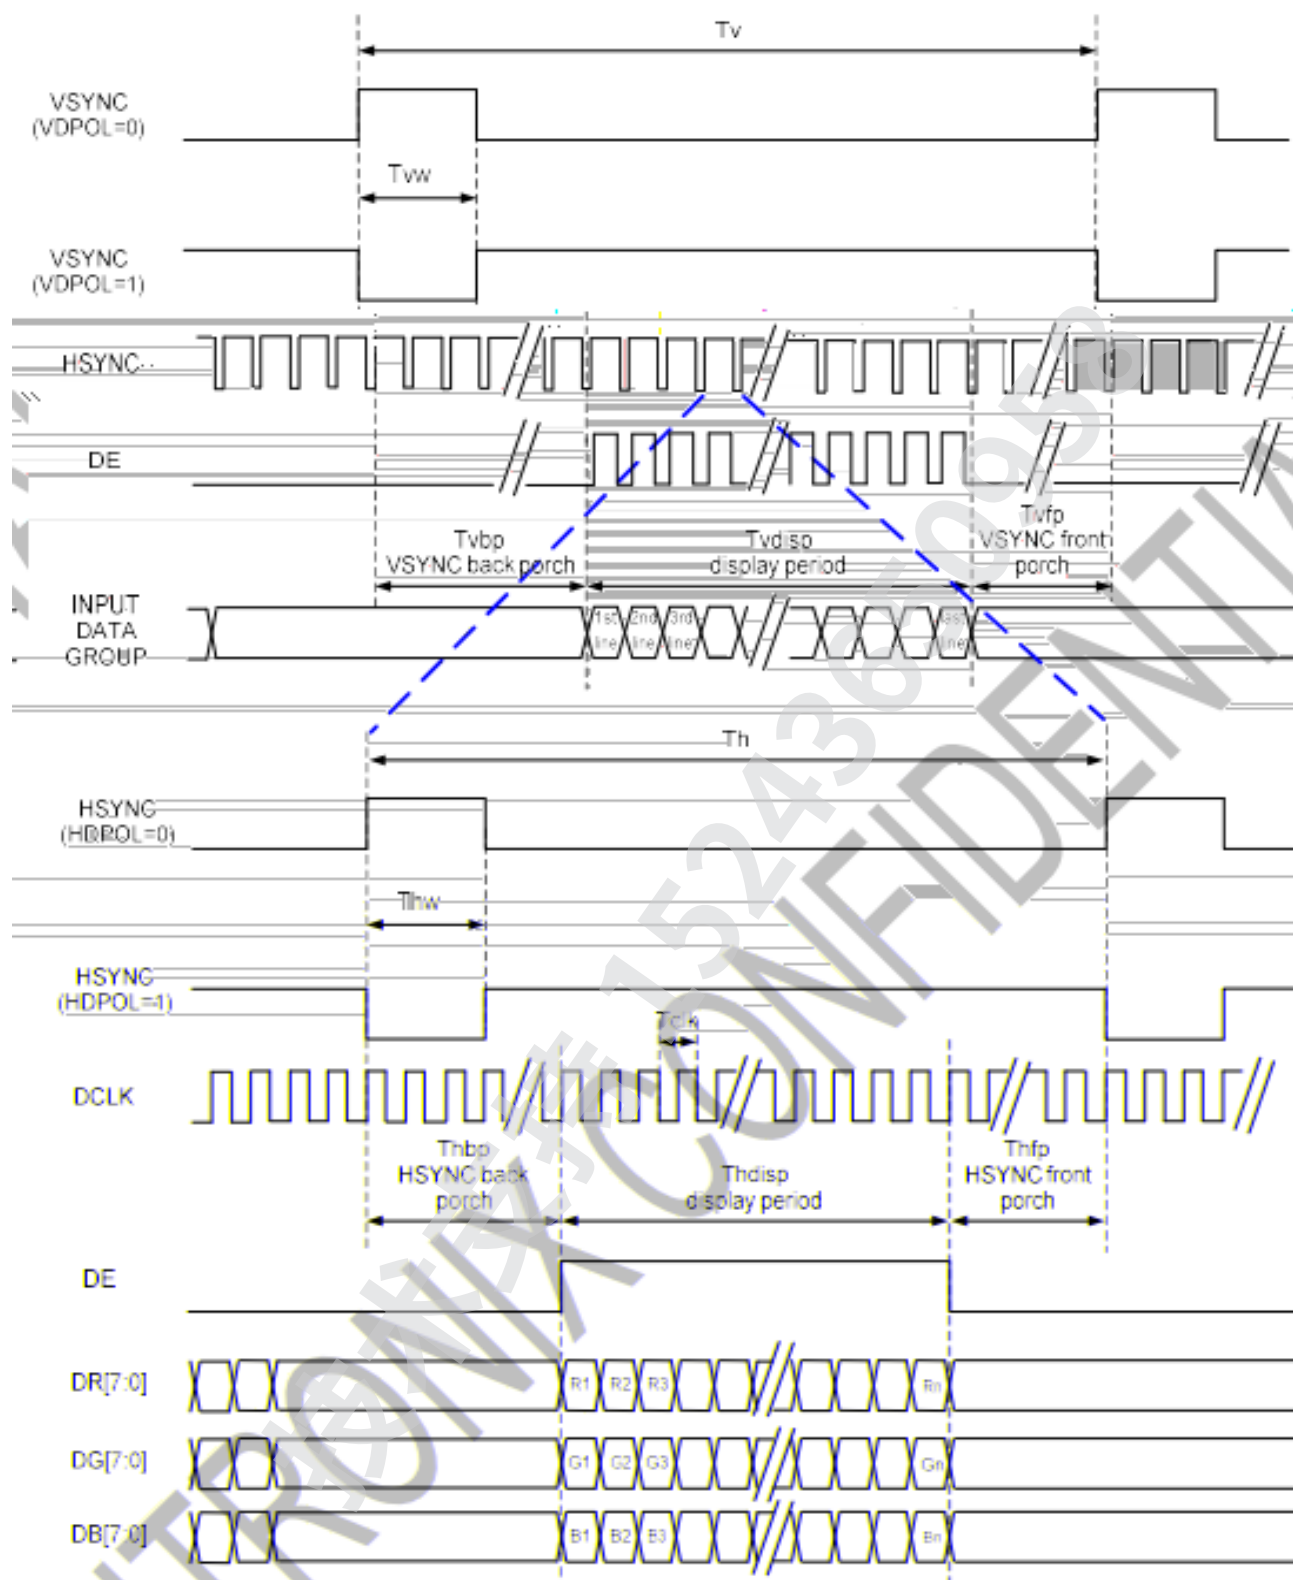

Power On Sequence

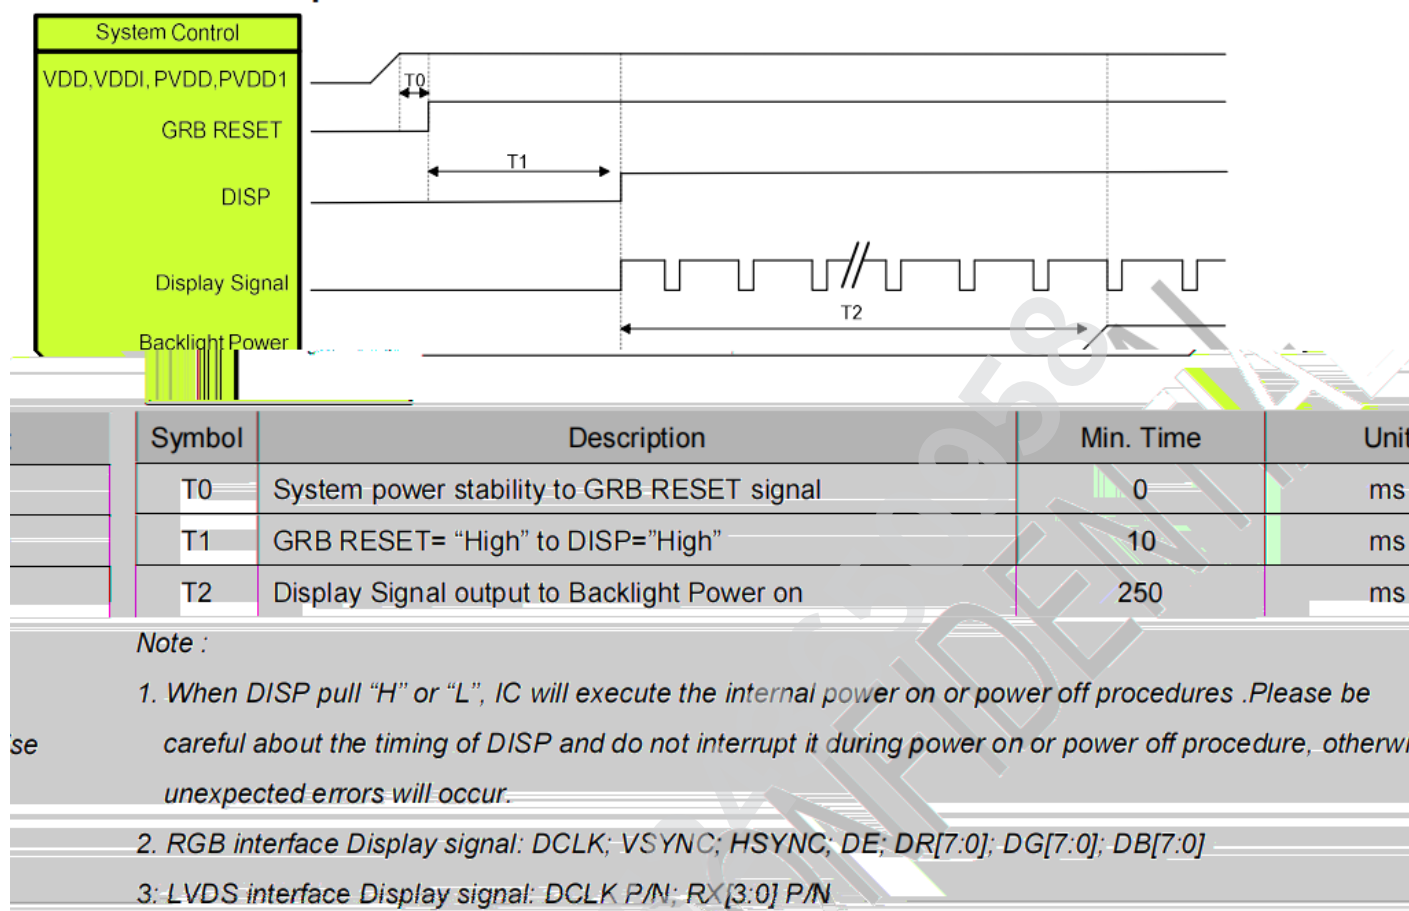

Power Off Sequence

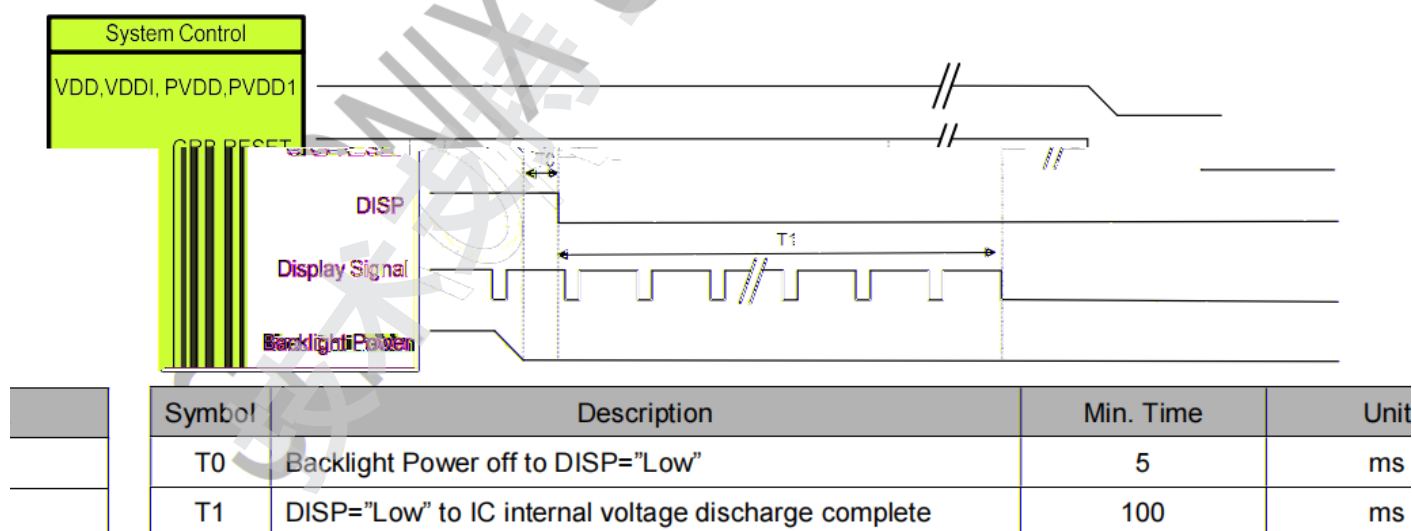

Note :

- When DISP pull "H" or "L", IC will execute the internal power on or power off procedures. Please be careful about the timing of DISP and do not interrupt it during power on or power off procedure, otherwise unexpected errors will occur.
- RGB interface Display signal: DCLK; VSYNC; HSYNC; DE; DR[7:0]; DG[7:0]; DB[7:0]
- LVDS interface Display signal: DCLK P/N; RX[3:0] P/N

■ INTERFACE DESCRIPTION

接口定义

CTP接口定义

	INT	CTP
	SDA	CTP
	SCL	CTP
	RST	CTP
	GND	CTP
	VDD	CTP

技术支持 15243650958

■ RELIABILITY TEST CONDITIONS

可靠性试验条件

No. 序号	Test Item 试验项目	Test Condition 试验条件	Inspection after test 判断标准
		±	
		±	
		±	
		±	
		± ± ×	
		±	
		±	
Ω			

■ INSPECTION CRITERION

检查标准

目的:

适用范围:


缺陷定义:

抽样方案:

检查条件



LCD 区域定义:

A /
B VA / A
A +B =
C , LCM

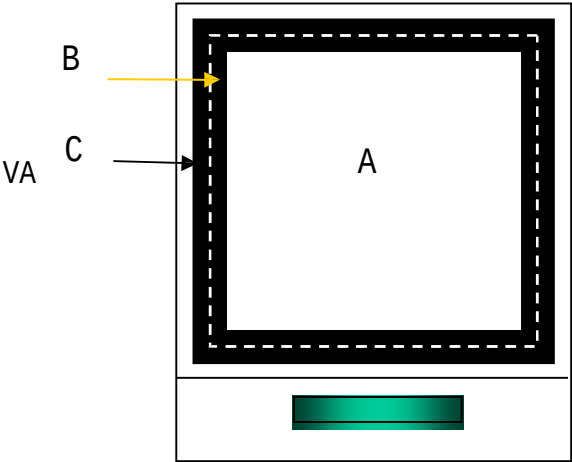

序号	检验项目	检验标准	判断	AQL

除以上功能重缺陷以外,所



		(1)						
		X		Y				Z
		≤	≤	≤	≤			
		(2)						
		X		Y		X		
		X≤		X≤		Z≤		2
		2.0 Y≤		2.0 Y≤		Z≤		1
		X 5.0		Y 5.0		Z≤		0

Note: 如有特殊品质要求，需以双方品质协议为准.

■ PRECAUTIONS FOR USING LCD MODULES

使用注意事項

技术支持 15243650958

/

技术支持 15243650958

■ PACKING SPECIFICATION

包装规格书

技术支持 15243650958

出货流程图

