


Economic AC Power Source

APS-4000 Series

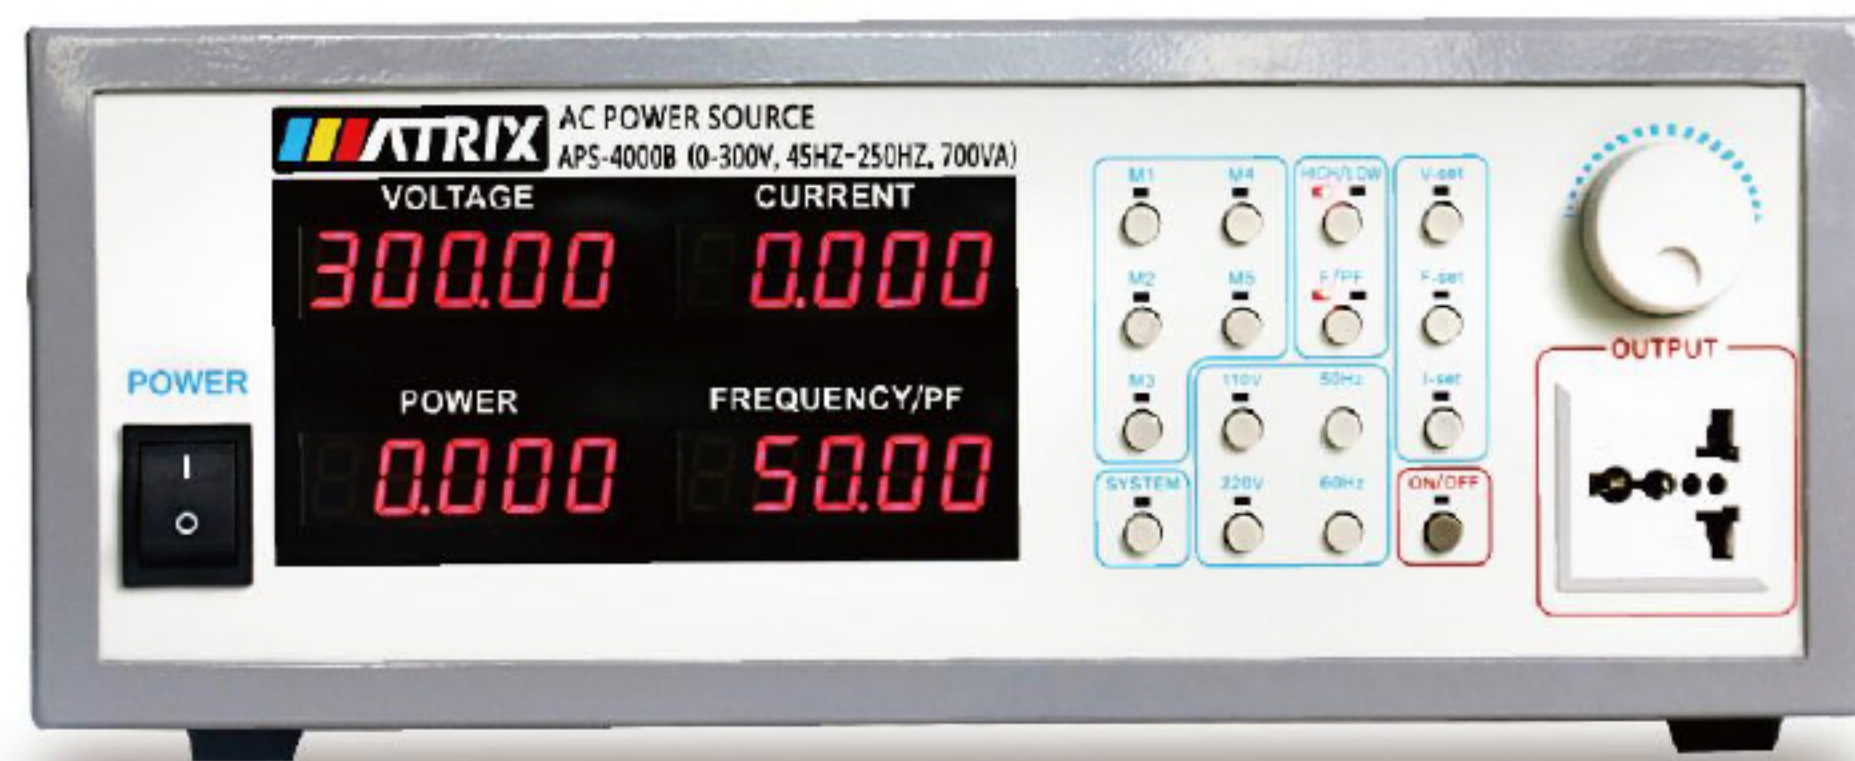

Communication Interface: RS-232

- Advanced Direct Digital Synthesis (DDS) technology ensures high frequency stability, signal continuity, and accurate measurement.
- Shortcut keys for quick switching between 110 V, 220 V, 50 Hz, and 60 Hz presets.
- Key Lock function prevents accidental operation.
- Five memory locations (M1–M5) for storing frequently used voltage (V) and frequency (F) settings, easily recalled with a single key.
- Push-button endless rotary encoder knob; press to move the cursor position.
- Four-window, five-digit display simultaneously shows voltage (V), frequency (F), current (I), power (P), and power factor (PF) with high accuracy.
- Measuring functions: voltage, current, frequency, power, and power factor.
- Strong overload capacity: 300% overload for 2 s.
- Intelligent alarm function automatically identifies the cause of failure and displays the corresponding error code when an alarm occurs.
- Equipped with 100% load and no-load switching function; voltage stabilization response time is within 20 ms.
- Output voltage: 0–150.00 V, 0–300.00 V.
- Output frequency: 45.00–250.00 Hz.
- Input and output are isolated.
- Soft-start function prevents damage to the power supply caused by load inrush current (e.g., from a motor) at power-on.

*Note: The 110 V / 220 V preset is factory-configured and not user-selectable via a physical switch.

Model	APS-4000A	APS-4000B	APS-4000C
Capacity	350 VA	700 VA	1200 VA
Operating Mode	SPWM		
Input			
Phase	Single-phase, 2-wire (1Φ2W)		
Voltage	110 V AC or 220 V AC ±10% (factory-configured, not user-selectable)		
Frequency	47–63 Hz		
Output			
Phase	Single-phase, 2-wire (1Φ2W)		
Voltage	0–150 VAC / 0–300 VAC, auto-ranging		
Frequency	45–250 Hz (0.1 Hz step)		
Maximum Current	L = 120 V: 3 A	L = 120 V: 6 A	L = 120 V: 10 A
	H = 240 V: 1.5 A	H = 240 V: 3 A	H = 240 V: 5 A
Load Regulation	1%		
THD	≤2% at 120 V (low range) and 240 V (high range), with pure resistive load		
Frequency Stability	0.01%		
Display	Vrms, Arms, Freq, Wattage, PF		
Voltage Resolution	0.01 V		
Frequency Resolution	0.01 Hz		
Current Resolution	0.001 A		
Memory	M1–M5 (V, F, A)		
Current Limit Setting	0 to Max Current (Max Current = Max Capacity / 240 V)		
Output Protection	Overcurrent, Overtemperature, Overload, Short Circuit		
Operating Environment	0–40°C, 20–80% RH		
Net Weight	28.0 lb	33.1 lb	40.8 lb
Gross Weight	32.0 lb	36.8 lb	44.1 lb
Unit Dimensions (W×H×D)	14.4 × 5.9 × 16.9 in	14.4 × 5.9 × 16.9 in	14.4 × 5.9 × 16.9 in
Packing Dimensions (W×H×D)	20.1 × 10.0 × 21.7 in	20.1 × 10.0 × 21.7 in	20.1 × 10.0 × 21.7 in