



Decoding reliability

Fixed 130-byte payloads | WiMAX (1248, 1040) | BPSK over real AWGN

Complete-block reliability

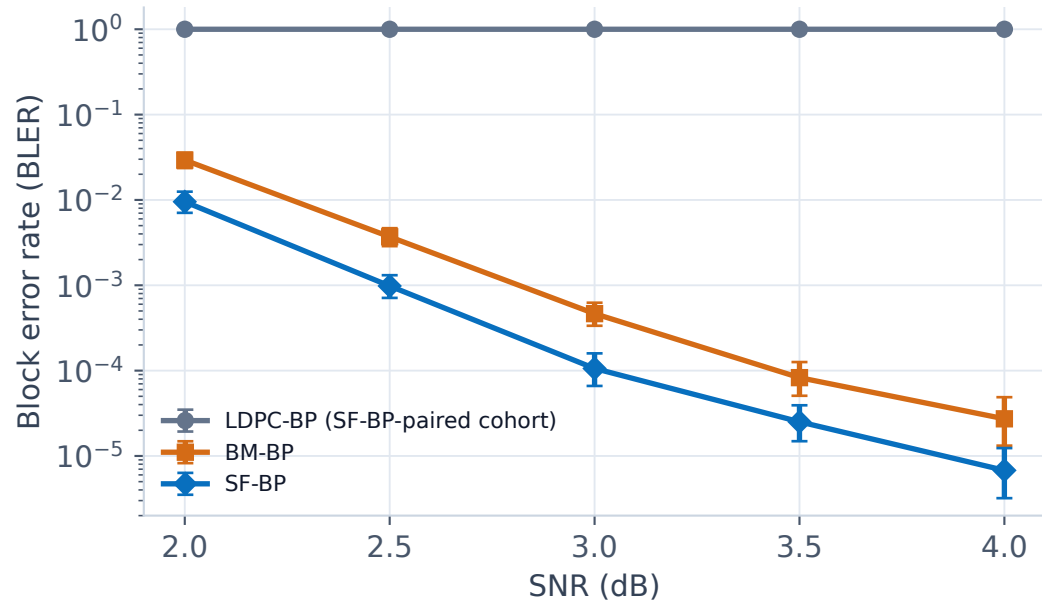

Residual byte errors

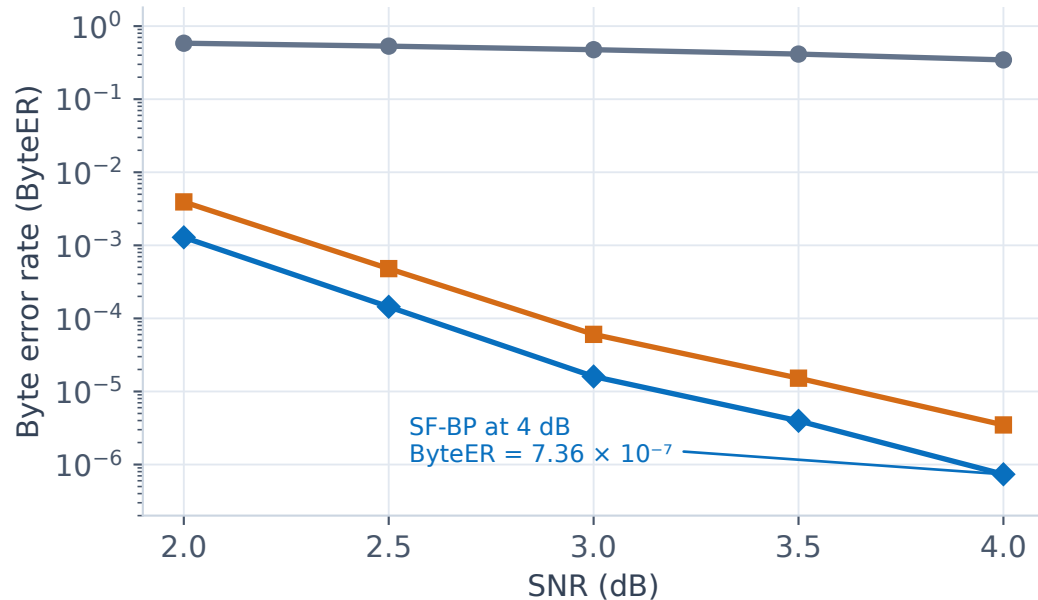

BLER bars: per-point 95% confidence sequences. ByteER has no interval shown. SF-BP and BM-BP runs are not mutually paired at high SNR.