

HD-G218 GEN2 18-PORT USB-C HUB

USER MANUAL

4
55mm

1
55mm

2
55mm

3
55mm


90mm

USB-C HUB STANDBY POWER CONSUMPTION

When bus-powered: <3.5W(5V/0.7A), actual 2.95W
When only PD power is connected: <3.5W (20V/0.175A), actual 3.08W
When only external power is connected: <3.5W (20V/0.17A), actual 20.5V/0.142A

USB-C HUB MAX POWER CONSUMPTION

Hub Alone: 9.5W
USB-A 10G x 2: Max 9W
USB-C 10G x 1: Max 7.5W
USB-A 2.0 x 2: Max 4.5W
USB-A 2.0 Red Core: 24W (12V/2A)
All USB: Max 45W
MicroSD/SD: 1.65W (3.3V/0.5A)




FOR TECHNICAL SUPPORT, PLEASE VISIT:

Website Live Chat: www.hypershops.com
Knowledge Base: support.hypershops.com
Support Email: support@hypershops.com
Support Telephone: +1408.737.7878



HYPERDRIVE GEN2 18-PORT USB-C HUB QUICK START GUIDE

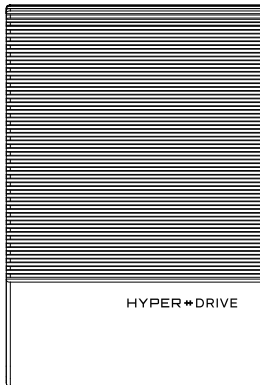

INTRODUCTION

HyperDrive GEN2 18-port USB-C Hub is a next generation USB-C Hub that turns a single USB-C port on the host device/computer into 18 high speed/power ports like HDMI 4K60Hz x 2, DP 4K60Hz, VGA, USB-A 10Gbps x 2, USB-C 10Gbps, USB-A 2.0 x 2, USB-A QC 3.0, Gigabit Ethernet, Coaxial SPDIF, Toslink Optical Fiber, 3.5mm Audio Jack TRRS, UHS-II MicroSD/SD 4.0 312MB/s, DC 180W and USB-C Power Delivery 100W.

MICROSD/SD

UHS-I SD 4.0 specification, backward compatible with previous SD specifications. Supports maximum read/write speed of 312MB/s. Supports SDHC/SDXC memory cards up to 2TB. MicroSD and SD slots can read and write at the same time.

LED LIGHT

USB-A 10Gbps x 2, USB-C 10Gbps

3 ports sharing 10Gbps bandwidth
Each USB-A has max output current of 900mA
Single USB-C has max output current of 1500mA

3.5MM AUDIO JACK

4 pole (TRRS) stereo 384KHz
32-bit maximum sampling rate
Supports 384KHz 32-bit microphone

USB-A QC 3.0

Charging only. Port only works when USB-C hub is connected to PD charger or external power supply
Supports FCP and Quick Charge 2.0/3.0 5V/9V/12V
Supports BC1.2 DCP mode max 1.5A

HDMI x 2, DISPLAYPORT OR VGA

Support up to 3 video output at the same time.
DP and VGA share the same video output so only one (DP or VGA) port can output video at any given time. If both are connected, DP will have priority over VGA.
MacOS supports SST (Single Stream Transport) so all external displays will show the same image at max 4K60Hz
PC Windows/Chrome OS supports MST (Multi Stream Transport) and will support 3 extended displays
1 extended display will be 4K60Hz
2 extended displays will be 4K30Hz + 4K30Hz
3 extended displays will be 4K30Hz + 4K30Hz + 1080p

USB-A 2.0 x 2

Sharing 480Mbps bandwidth and 900mA power output

COAXIAL

SPDIF interface: Max 96KHz/24bit output, 0.4V ~ 0.6V Vpp@50Ω load

TOSLINK

Optical fiber SPDIF interface: Max 96KHz/24bit output, ~21dBm ~-15dBm light intensity output

GIGABIT ETHERNET

Supports 10Mbps/100Mbps/1Gbps Half/Full duplex transmission

DC 180W

Connect to optional 180W external power supply to provide maximum power to USB-C Hub and max 100W charging to computer.

USB-C PD

Maximum 100W Power Delivery.
Connect to USB-C PD power supply.

USB-C COMPUTER

Upstream port. Connect to host device/computer with supplied 100W/10Gbps rated USB-C to USB-C cable. Supports DP1.4 Alt mode and 100W Power Delivery. PD power is dynamically adjusted according to use of other interfaces, up to max 100W when using 180W external power supply.

