

# Lab - Mapping the Internet

## **Objectives**

Part 1: Determine Network Connectivity to a Destination Host

Part 2: Trace a Route to a Remote Server Using Tracert

## Background / Scenario

Route tracing computer software lists the networks that data traverses from the user's originating end device to a distant destination device.

This network tool is typically executed at the command line as:

tracert <destination network name or end device address>

(Microsoft Windows systems) or

traceroute <destination network name or end device address>

(UNIX, Linux systems, and Cisco devices, such as switches and routers)

Both tracert and traceroute determine the route taken by packets across an IP network.

The **tracert** (or **traceroute**) tool is often used for network troubleshooting. By showing a list of routers traversed, the user can identify the path taken to reach a particular destination on the network or across internetworks. Each router represents a point where one network connects to another network and through which the data packet was forwarded. The number of routers is known as the number of hops the data traveled from source to destination.

The displayed list can help identify data flow problems when trying to access a service such as a website. It can also be useful when performing tasks, such as downloading data. If there are multiple websites (mirrors) available for the same data file, one can trace each mirror to get a good idea of which mirror would be the fastest to use.

Command-line based route tracing tools are usually embedded with the operating system of the end device. This activity should be performed on a computer that has Internet access and access to a command line.

## Required Resources

PC with Internet access

## Part 1: Determine Network Connectivity to a Destination Host

To trace the route to a distant network, the PC used must have a working connection to the Internet. Use the **ping** command to test whether a host is reachable. Packets of information are sent to the remote host with instructions to reply. Your local PC measures whether a response is received to each packet, and how long it takes for those packets to cross the network.

© 2016 Cisco and/or its affiliates Page 1 of 6

a. At the command-line prompt, type **ping www.cisco.com** to determine if it is reachable.

#### Command Prompt

```
Microsoft Windows [Version 10.0.19045.2364]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Wenura>ping www.cisco.com

Pinging e2867.dsca.akamaiedge.net [104.122.16.62] with 32 bytes of data:
Reply from 104.122.16.62: bytes=32 time=69ms TTL=55
Reply from 104.122.16.62: bytes=32 time=72ms TTL=55
Reply from 104.122.16.62: bytes=32 time=58ms TTL=55
Reply from 104.122.16.62: bytes=32 time=56ms TTL=55

Ping statistics for 104.122.16.62:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 56ms, Maximum = 72ms, Average = 63ms

C:\Users\Wenura>
```

b. Now ping one of the Regional Internet Registry (RIR) websites located in different parts of the world to determine if it is reachable:

Africa: www.afrinic.net
Australia: www.apnic.net
South America: www.lacnic.net
North America: www.arin.net

**Note**: At the time of writing, the European RIR <u>www.ripe.net</u> does not reply to ICMP echo requests.

The website you selected will be used in Part 2 for use with the tracert command.

© 2016 Cisco and/or its affiliates Page 2 of 6

```
C:\Users\Wenura>ping www.afrinic.net

Pinging www.afrinic.net [196.216.2.6] with 32 bytes of data:

Reply from 196.216.2.6: bytes=32 time=381ms TTL=44

Reply from 196.216.2.6: bytes=32 time=634ms TTL=44

Reply from 196.216.2.6: bytes=32 time=587ms TTL=44

Reply from 196.216.2.6: bytes=32 time=526ms TTL=44

Ping statistics for 196.216.2.6:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 381ms, Maximum = 634ms, Average = 532ms

C:\Users\Wenura>_
```

## Part 2: Trace a Route to a Remote Server Using Tracert

After you determine if your chosen websites are reachable by using **ping**, you will use **tracert** to determine the path to reach the remote server. It is helpful to look more closely at each network segment that is crossed.

Each hop in the **tracert** results displays the routes that the packets take when traveling to the final destination. The PC sends three ICMP echo request packets to the remote host. Each router in the path decrements the time to live (TTL) value by 1 before passing it onto the next system. When the decremented TTL value reaches 0, the router sends an ICMP Time Exceeded message back to the source with its IP address and the current time. When the final destination is reached, an ICMP echo reply is sent to the source host.

For example, the source host sends three ICMP echo request packets to the first hop (192.168.1.1) with the TTL value of 1. When the router 192.168.1.1 receives the echo request packets, it decrements the TTL value to 0. The router sends an ICMP Time Exceeded message back to the source. This process continues until the source hosts sends the last three ICMP echo request packets with TTL values of 8 (hop number 8 in the output below), which is the final destination. After the ICMP echo request packets arrive at the final destination, the router responds to the source with ICMP echo replies.

For hops 2 and 3, these IP addresses are private addresses. These routers are the typical setup for point-ofpresence (POP) of ISP. The POP devices connect users to an ISP network.


A web-based whois tool is found at <a href="http://whois.domaintools.com/">http://whois.domaintools.com/</a>. It is used to determine the domains traveled from the source to destination.

a. At the command-line prompt, trace the route to <a href="www.cisco.com">www.cisco.com</a>. Save the **tracert** output in a text file. Alternatively, you can redirect the output to a text file by using > or >>.

```
C:\Users\User1> tracert www.cisco.com
or
```

© 2016 Cisco and/or its affiliates Page 3 of 6

#### Command Prompt C:\Users\Wenura>tracert www.cisco.com Tracing route to e2867.dsca.akamaiedge.net [104.122.16.62] over a maximum of 30 hops: 1 ms 1 ms 1 ms 192.168.1.1 Request timed out. 165 ms 103 ms 44 ms 222.165.184.193 65 ms 222.165.175.142 4 169 ms 60 ms 151 ms 46 ms 51 ms 222.165.175.137 6 150 ms 53 ms 38 ms 103.87.125.129 76 ms 87 ms 103.87.124.93 384 ms 8 200 ms 89 ms 105 ms 103.87.124.70 Request timed out. 10 515 ms 580 ms 70 ms a104-122-16-62.deploy.static.akamaitechnologies.com [104.122.16.62] ſrace complete.

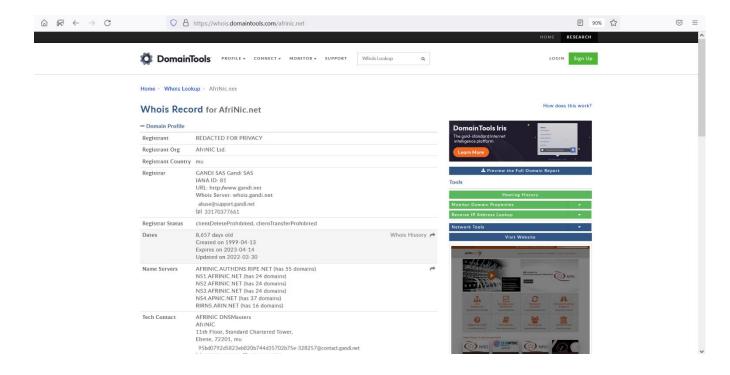

© 2016 Cisco and/or its affiliates Page 4 of 6

```
C:\Users\Wenura>
C:\Users\Wenura>tracert www.afrinic.net
Tracing route to www.afrinic.net [196.216.2.6]
over a maximum of 30 hops:
 1
        1 ms
                 1 ms
                          3 ms 192.168.1.1
 2
                                Request timed out.
     263 ms
                75 ms
                                222.165.184.193
                         74 ms
 4
      58 ms
               131 ms
                         57 ms 222.165.175.142
 5
      439 ms
               474 ms
                                222.165.175.137
 6
      56 ms
               49 ms
                         37 ms 103.87.125.129
 7
     137 ms
               226 ms
                        155 ms 103.87.124.93
 8
     301 ms
               153 ms
                        196 ms 103.87.124.46
 9
                        198 ms ipv4.de-cix.fra.de.as37271.workonline.africa [80.81.195.27]
      224 ms
               196 ms
 10
                                Request timed out.
 11
                                Request timed out.
12
               345 ms
                        371 ms esr1-isd-cr1-te0-0-26.wolcomm.net [197.157.77.97]
     418 ms
13
      398 ms
               358 ms
                        358 ms
                                197.157.64.195
 14
     601 ms
               405 ms
                        550 ms www.afrinic.net [196.216.2.6]
Trace complete.
```

. All rights reserved. This document is Cisco Public.

### **Lab - Mapping the Internet**

```
C:\Users\User1> tracert www.cisco.com > tracert-cisco.txt
Tracing route to e144.dscb.akamaiedge.net [23.67.208.170] over
a maximum of 30 hops:
1
                     <1 ms 192.168.1.1
     1 ms
             <1 ms
2
     14 ms
             7 ms
                      7 ms 10.39.0.1
3
     10 ms
                      7 ms 172.21.0.118
             8 ms
4
     11 ms
             11 ms 11 ms 70.169.73.196
                     11 ms 70.169.75.157
5
     10 ms
              9 ms
     60 ms
              49 ms
                     * 68.1.2.109
7
     43 ms
             39 ms
                     38 ms Equinix-DFW2.netarch.akamai.com [206.223.118.102]
8
              35 ms 33 ms a23-67-208-170.deploy.akamaitechnologies.com
     33 ms
[23.67.208.170]
Trace complete.
```

b. The web-based tool at <a href="http://whois.domaintools.com/">http://whois.domaintools.com/</a> can be used to determine the owners of both the resulting IP address and domain names shown in the tracert tools output. Now perform a **tracert** to one of RIR web sites from Part 1 and save the results.

Africa: www.afrinic.net
Australia: www.apnic.net
Europe: www.ripe.net
South America: www.lacnic.net
North America: www.arin.net

© 2016 Cisco and/or its affiliates Page 5 of 6

What can affect	tracert results?		
	. All rights reserved. This docum	nent is Cisco Public.	
	v		

List the domains below from your tracert results using the web-based whois tool.

c. Compare the lists of domains crossed to reach the final destinations.

Reflection

© 2016 Cisco and/or its affiliates Page 6 of 6