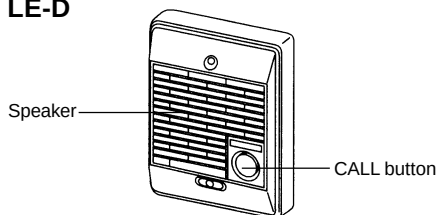


LE-Series Door Stations

Surface and Flush Mount

LE-D**COMMON SPECIFICATIONS:**


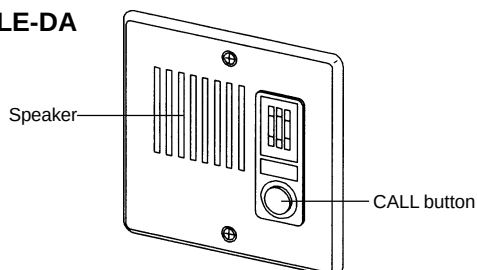
System: LEM, LEF, LAF-C
Speaker: 20 ohms
Wiring Distance: 650' w/22AWG; 1600' w/18AWG
Temp. Rating: 14 to 140 F

LE-D Specifications:

Dimensions: 4-3/4" x 3-7/16" x 1-1/8"
Material: ABS plastic
Color: Black faceplate, white trim ring

LE-D FEATURES:

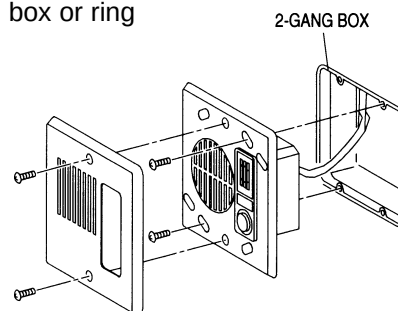
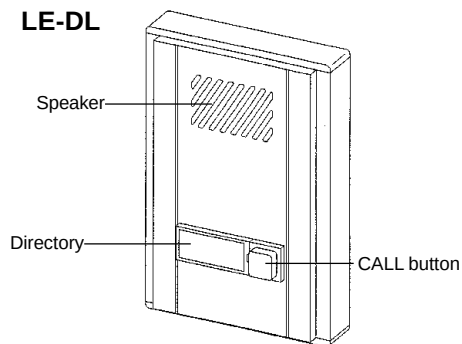
- Weather resistant for outdoor use
- Push button to call master station(s)
- Hands free communication when master answers
- Compact surface mount design
- Mounts to 1-gang box or ring

MOUNTING & INSTALLATION:**LE-DA****Common Specifications, plus:****LE-DA Specifications:**

Material: Plastic case, stainless steel faceplate
Dimensions: 4-1/2" x 4-9/16" x 1-9/16"

LE-DA FEATURES:

- Weather resistant for outdoor use
- Same calling and communication as LE-D
- Slim flush mount design
- Stainless steel faceplate
- Mounts in 2-gang box or ring

MOUNTING & INSTALLATION:**LE-DL****Common Specifications, plus:****LE-DL Specifications:**

Backlight: 12V DC from system
Material: Anodized aluminum
Dimensions: 6-7/8" x 4-3/4" x 1"

LE-DL FEATURES:

- Weather resistant for outdoor use
- Same calling and communication as LE-D
- Directory strip with backlighting option
- Slim surface mount design
- Anodized aluminum cover
- Mounts to 1-gang box or ring

MOUNTING & INSTALLATION: