

SUBMITTAL	ITEM TYPE	TITLE	LAST UPDATED
INTERCOM	INTERCOM SYSTEM	LEF-10C	AUGUST 20, 2018



FEATURES:

- Up to 11 stations
- Fully intermixable system (masters and subs)
- LED annunciation and momentary tone from calling sub or door station
- Push-to-talk at calling master, and hands free at responding station
- Selective monitoring
- Privacy button to prevent eavesdropping
- All Call button (requires additional equipment)
- Video door entry can be integrated
- Selective door release
- Voice, music, and call tone volume controls

SPECIFICATIONS

Power source: 12V DC, 300mA per station.

Use PS-1225UL


Output: 800mW @ 20 ohms (reception),

500mW @ 20 ohms (transmission)

Communication: Press-to-talk, release-to-listen at master station. Hands free response.

Talk channel: 1 talkpath. Occupied LED when in use.

Capacity: Up to 11 stations, intermixable

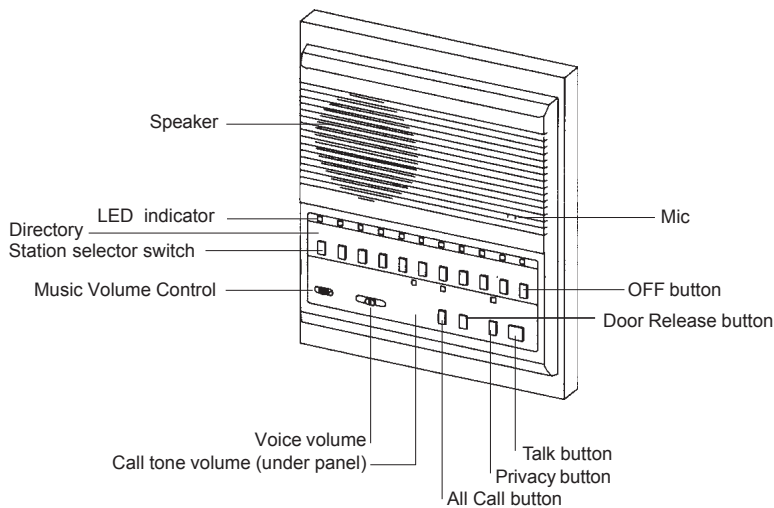

Wiring Distance:

650' w/22AWG; 1600' w/18AWG

Select switch extra contact rating:

12V DC, 30mA ("K1-K10")

RY-PA contact rating:

110V AC, 1A; or 24V DC, 1A

Speaker sensitivity:

40dB

Total Harmonic Distortion:

Less than 5% at rated output power

Signal to Noise Ratio: 60dB

Frequency Response: -3dB, 770-6800Hz.

