


## RELAYS

### External Signaling Relays

#### RY-AC

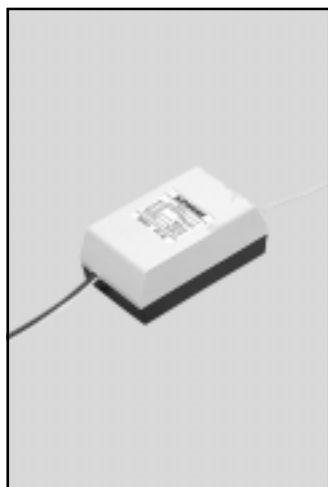


#### EXTERNAL SIGNALING RELAY:

- Ring a standard doorbell or activate a separate device when a call is placed from a door station
  - LEF and LEF-C Series
- In high noise areas or where a light is needed, or to activate a bell, buzzer, or light when calling between handset-type intercoms
  - TD-H Series Selective Calling and Paging system
  - IE-8 Series Selective Calling Handset system

#### SPECIFICATIONS:

|                           |                                                |
|---------------------------|------------------------------------------------|
| Power Source:             | Supplied by master                             |
| Relay Switching Capacity: | 1A @ 24V DC or 0.3A @ 240V AC                  |
|                           | Normally open dry contact                      |
| Contact Closure:          | Closed while call button is pressed            |
| External Device Reqmnts:  | AC or DC device not exceeding contact capacity |
| Dimensions (HxWxD):       | 4-1/16" x 2-1/4" x 1-3/8"                      |

#### TAR-3

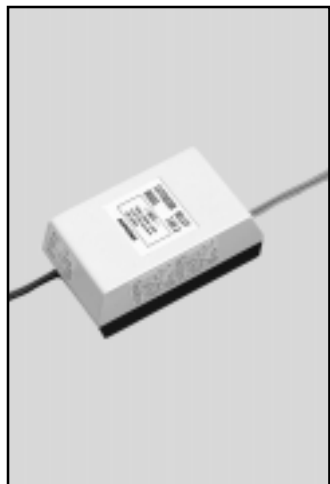

#### EXTERNAL SIGNALING RELAY:

- Ring a doorbell when a call is placed from a door station
  - IE-Series Handset systems
  - MY-1CD, MY-2CD and MK Video systems
  - K-Series Color Video systems
- Activate a light or a buzzer when a call is received
  - AT-406 Handset system
  - NEM Lamp Memory system
  - TB-M Internal Telephone system
  - IE-8 Selective Calling Handset system

#### SPECIFICATIONS:

|                           |                                                |
|---------------------------|------------------------------------------------|
| Power Source:             | 6V DC, supplied by SKK-620                     |
| Relay Switching Capacity: | 1A @ 24V DC or 0.3A @ 240V AC.                 |
|                           | Normally open dry contact                      |
| Contact Closure:          | Closed for the duration of the chime signal    |
| External Device Reqmnts:  | AC or DC device not exceeding contact capacity |
| Dimensions (HxWxD):       | 4-1/16" x 2-1/4" x 1-3/8"                      |

## RELAYS

### Door Release and External Light Activation Relays

#### RY-PA



#### DOOR RELEASE RELAY:

- Selectively release one or more doors with the LEF system (LEF-3L, plus all 5- and 10-call LEF masters)
  - Each door to be released requires a separate RY-PA
  - Also used for LDF, NDR, TB-M/D systems (SOP)
- Connect an electric door strike to the VC-M system

#### EXTERNAL SIGNALING:

- Activate a doorbell or buzzer when a call is received at a VC-K handset in a VC-M system

#### SPECIFICATIONS:

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| Power Source:             | Supplied by system                                          |
| Relay Switching Capacity: | 1A @ 24V DC or 0.3A @ 240V AC.<br>Normally open dry contact |
| External Device Reqmnts:  | 110V AC or 24V DC door strike                               |
| Dimensions (HxWxD):       | 2-1/8" x 1-3/8" x 7/8"                                      |

#### MAW-B



#### EXTERNAL LIGHT ACTIVATION RELAY:

- Activate a light at the door station to illuminate entry area
  - MY Video systems using the MYW-P3CB or MYW-P3L
  - K-Series Color Video Systems
  - VY Multi-Unit Video Entry system

#### DOOR RELEASE RELAY:

- For integration of another manufacturer's electric door strike
  - VY Multi-Unit Video Entry system

#### SPECIFICATIONS:

|                           |                                                                                            |
|---------------------------|--------------------------------------------------------------------------------------------|
| Power Source:             | Supplied by system                                                                         |
| Relay Switching Capacity: | 1A @ 24V DC or 0.3A @ 240V AC<br>Normally open dry contact                                 |
| Contact Closure:          | Light Activation: While camera is on<br>Door Release: While door release button is pressed |
| Dimensions (HxWxD):       | 4-1/16" x 2-1/4" x 1-3/8"                                                                  |