



SUBMITTAL	ITEM TYPE	TITLE	LAST UPDATED
STANDARD ITEM	GATE OPERATOR	BYAN 800-900	October 23, 2014 9:24 AM

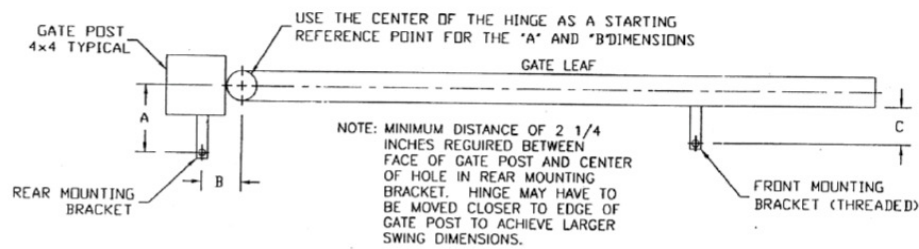

INWARD SWING MOUNTING OPTION

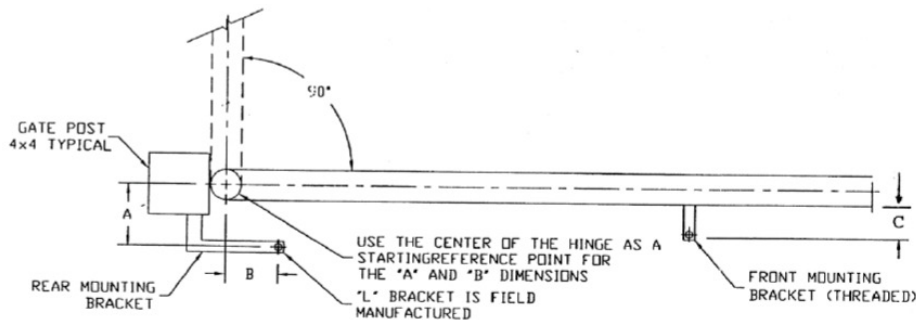

OUTWARD SWING MOUNTING OPTION

OPERATOR OVERVIEW

MODEL:

BYAN 900GATE

WEIGHT MAX:

1600 LBS

RATE OF TRAVEL:

13 SECONDS TO 90 DEGREE OPEN

TEMPERATURE:

-60°F TO 220°F

WARRANTY:

4 YEAR LIMITED

ETL LISTED UL325:

SPECIFIC TO LOCATION: I, II, III, IV
AVAILABLE

USER CONTROLS:

G2M CONTROL BOARD

POWER SPECS:

VOLTAGE:

115VAC 1 PHASE

ACCESSORY POWER:

24VAC 1A MAX (CONTROL BOARD)

HORSEPOWER:

1/6 HP


RECOMMENDED WIRE SIZES:

HIGH VOLTAGE (AC)


14AWG TO 400FT
12AWG TO 650FT
10AWG TO 1000FT
8AWG TO 1650FT
6AWG TO 2650FT

LOW VOLTAGE (AC)

18AWG TO 100FT
16AWG TO 170FT
14AWG TO 270FT
12AWG TO 430FT
10AWG TO 690FT
8AWG TO 1100FT

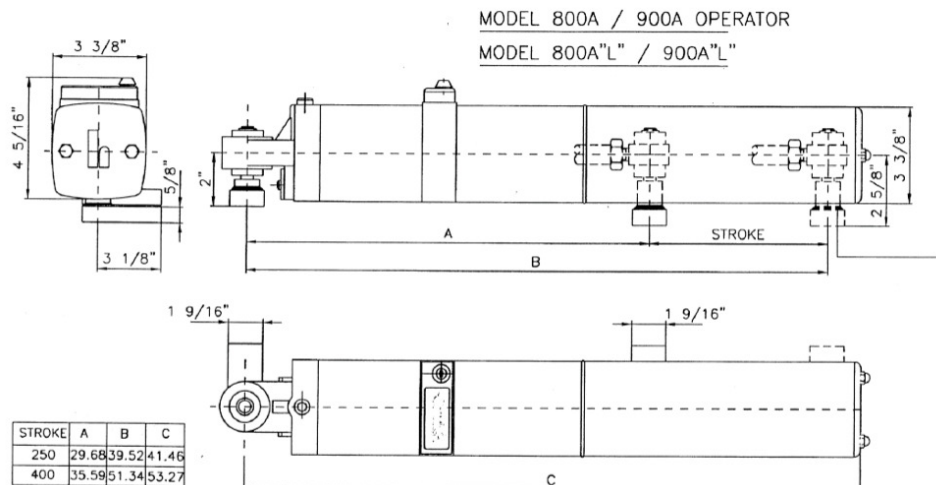

NOTE: WHEN THE OPERATOR IS CORRECTLY INSTALLED, THE FRONT MOUNTING BRACKET, THE ONE WITH THE HIGH SHOULDER, WILL BE 5/8" LOWER THAN THE REAR MOUNTING BRACKET.

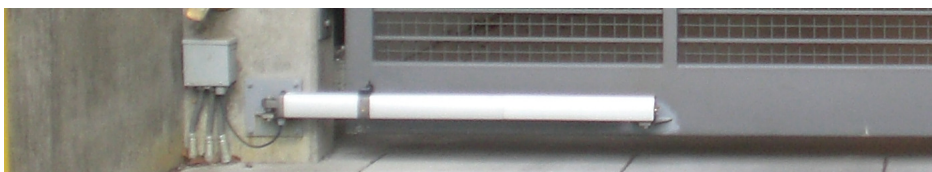

2525 NE COLUMBIA BLVD | PORTLAND, OR 97211
SERVICE 503.595.4716 | INSIDE SALES 503.946.1261 | TOLL FREE 1-888.813.6772

"SERVING THE PORTLAND/VANCOUVER METRO AREA SINCE 1984"