
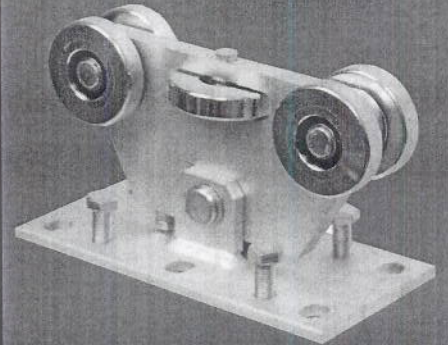


CA SERIES

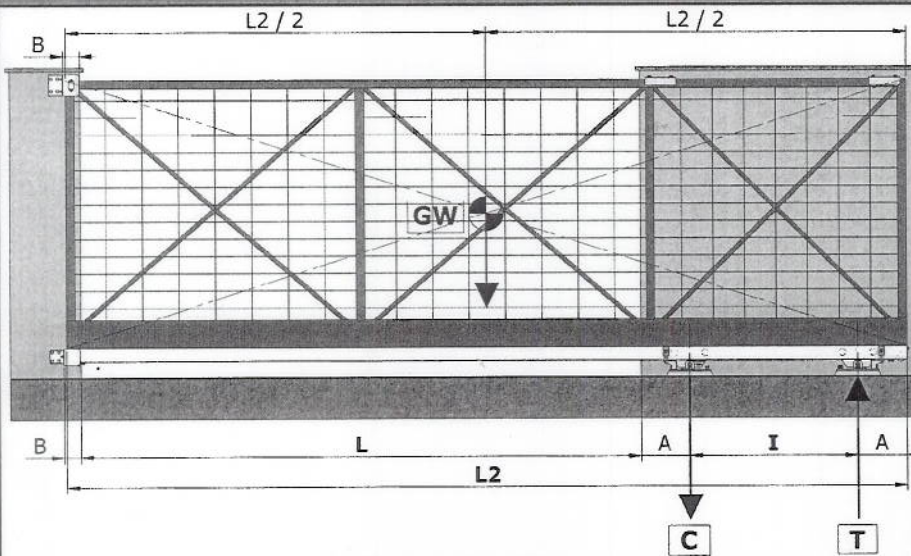

COMPONENTS

CA395: Carriage
CA396: End Wheel
CA397: End Cup
CA398: Anchor Bolt

CA399: Track
CA452: Nylon
Roller
CA465: Top Guide


KEY :

- L = GATE OPENING (FT)
- I = MIN DIMENSION OF CENTER TO CENTER CARRIAGE MEASUREMENT (FT)
- A = SIZE OF CA396 + HALF CARRIAGE (FT)
- B = SIZE OF CA397 (FT)
- L2 = GATE DIMENSION (FT)
- GW = MAX. WEIGHT OF GATE EXCLUDING TRACK (LB)
- C = FORCE OF COMPRESSION (LB)
- T = FORCE OF TENSION (LB)

	A	B	L	GW max.	I min.	L2	C	T
SMALL	10"	4 3/4"	6'8"	330	1'10"	10'6"	950	600
				440	1'10"	10'6"	1250	800
				550	1'10"	10'6"	1600	950
				660	1'10"	10'6"	1850	1150
			9'10"	550	1'10"	13'8"	2000	1400
				660	2'2"	14'	2050	1350
				770	2'6"	14'4"	2150	1300
				880	3'	14'10"	2150	1150
			13'1"	660	2'10"	17'11"	2150	1400
				880	4'	19'1"	2150	1150
				990	4'7"	19'8"	2150	1050
				1100	5'3"	20'4"	2150	950
			16'4"	770	4'4"	22'8"	2150	1250
				880	5'	23'4"	2150	1150
				990	5'9"	24'1"	2150	1050
				1100	6'7"	24'11"	2150	950
			19'8"	770	5'3"	26'11"	2150	1250
				880	6'2"	27'10"	2150	1150
				990	6'11"	28'7"	2150	1050
				1100	7'11"	29'7"	2150	950
MEDIUM	1'2"	4 3/4"	16'4"	770	3'4"	22'4"	2950	2000
				1100	5'	24'	2950	1600
				1430	6'8"	25'8"	2950	1300
				1760	8'9"	27'9"	2950	950
			19'8"	1100	6'2"	28'6"	2950	1550
				1320	7'5"	29'9"	2950	1350
				1540	9'1"	31'5"	2950	1100
				1760	10'10"	33'2"	2950	900
			22'11"	1100	8'7"	27'6"	2950	1550
				1320	10'6"	39'5"	2950	1300
				1540	12'10"	41'9"	2950	1050
				1760	15'4"	44'3"	2950	800
			26'3"	1100	7'7"	36'6"	2950	1600
				1320	9'7"	38'6"	2950	1400
				1540	11'8"	40'7"	2950	1150
				1760	14'	42'11"	2950	950
			29'6"	1100	10'1"	42'3"	2950	1450
				1320	12'4"	44'6"	2950	1250
				1540	14'10"	47'	2950	100
				1760	17'9"	49'11"	2950	750


	A	B	L	GW max.	I min.	L2	C	T
LARGE	1'8"	5 1/2"	22'11"	1100	4'2"	30'8"	5200	3650
				1760	6'7"	33'1"	5200	2900
				2200	8'5"	34'11"	5200	2450
				2860	11'8"	38'2"	5200	1750
			26'3"	1210	5'5"	35'3"	5200	3400
				1760	7'9"	37'7"	5200	2850
				2310	10'5"	40'3"	5200	2300
				2860	13'8"	43'6"	5200	1700
			29'6"	1320	6'9"	39'10"	5200	3300
				1870	9'7"	42'8"	5200	2700
				2310	12'	45'1"	5200	2250
				2860	15'9"	48'10"	5200	1650
			32'9"	1540	9'1"	45'5"	5200	3000
				1980	11'8"	48'	5200	2500
				2420	14'8"	51'	5200	2050
				2860	18'1"	54'5"	5200	1550
			39'4"	1650	12'6"	55'5"	5200	2700
				1980	15'	57'11"	5200	2350
				2420	18'9"	61'8"	5200	1900
				2860	23'4"	66'3"	5200	1350

Articolo [article]	395		
Misura [measure]	Piccolo [Small]	Medio [Medium]	Grande [Large]
A	180 [7 1/16"]	300 [11 13/16"]	500 [19 11/16"]
B	150 [5 15/16"]	150 [5 15/16"]	200 [7 7/8"]
C	-	160 [6 5/16"]	320 [12 9/16"]
ØD	Ø59,5 [2 5/16"]	Ø86 [3 7/16"]	Ø126 [4 15/16"]
E	125 [4 15/16"]	250 [9 13/16"]	440 [17 5/16"]
F	100 [3 15/16"]	100 [3 15/16"]	150 [5 15/16"]
G	52 [2 1/16"]	69 [2 3/8"]	99 [3 7/8"]
H	100 [3 15/16"]	135 [5 5/16"]	197 [7 3/4"]
I	135 [5 5/16"]	220 [8 5/16"]	380 [14 15/16"]
M	60 [2 3/8"]	75 [2 15/16"]	105 [4 1/8"]
S	15 [5/8"]	20 [13/16"]	30 [1 3/16"]
Asole [slothes]	n.4-18x25 [11/16"x1"]	n.6-18x25 [11/16"x1"]	n.6-22x30 [7/8"x1 3/16"]
Viti di regolazione [adjusting screws]	NO [no]	n.4 SI [yes]	n.4 SI [yes]
Bullone di registro [adjusting bolt]	SI [yes]	SI [yes]	SI [yes]
Confezione [packing]	1 Pz. [1 piece]	1 Pz. [1 piece]	1 Pz. [1 piece]

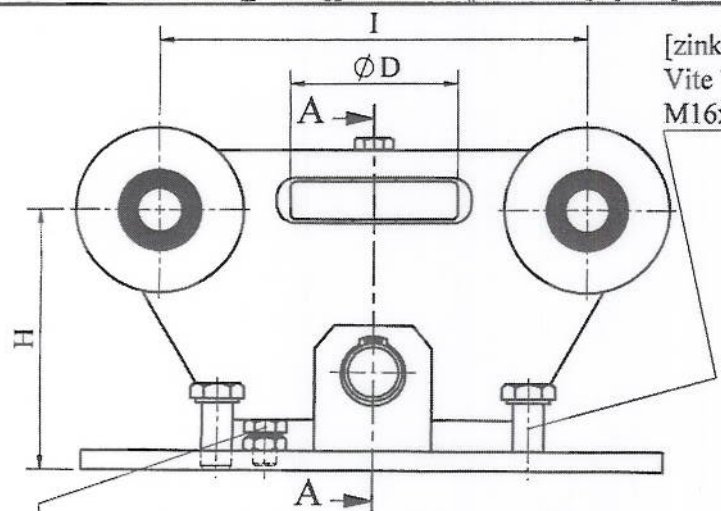


[zinked adjusting bolt] Bullone di registro zincato
[screw] Vite M12x16 UNI5739 [Nut] Dado M12 UNI5589

[zinked adjusting screw]
Vite T.E. di regolazione
M16x35 UNI5739 zincata

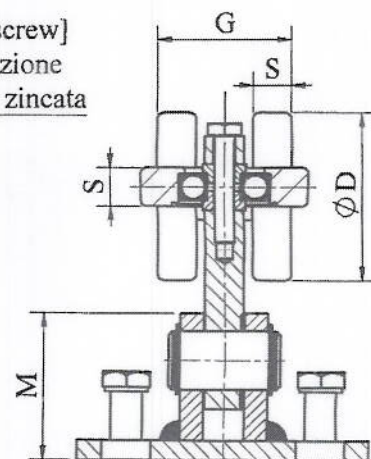

SEZIONE A-A
[SECTION A-A]

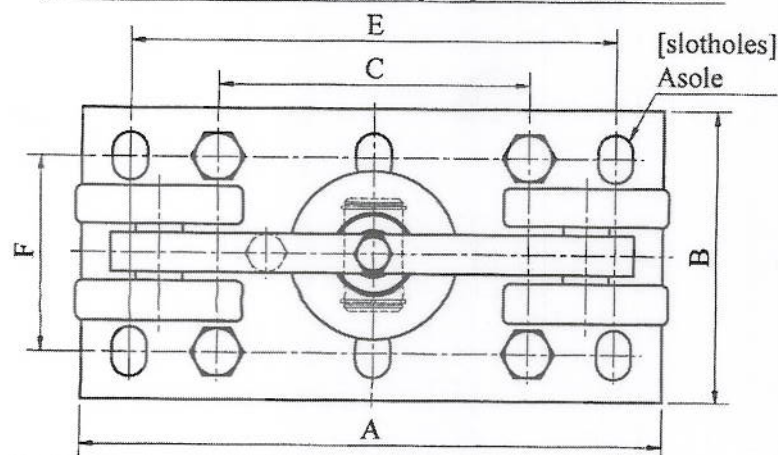

VISTA 3D
[3D VIEW]

