


SUBMITTAL	ITEM TYPE	TITLE	LAST UPDATED
STANDARD ITEM	LOOP	DIABLO DSP-7 DETECTOR	MARCH 12, 2018

FEATURES:

- Designed for solar powered applications.
- Designed to be cross talk free between other similar loops detectors.
- Plug and play. Switchless and self-adapting to most common installations. Connect it up and watch it work.
- Small profile, perfect for many installations.
- Automatically compensates for loop and lead-in sizes
- Fail-safe operation.
- Wide low-voltage operation.
- This series of Diablo Controls detectors are covered by United States patent. Patent number US 7,132,959 "Non-Interfering Vehicle Detection."

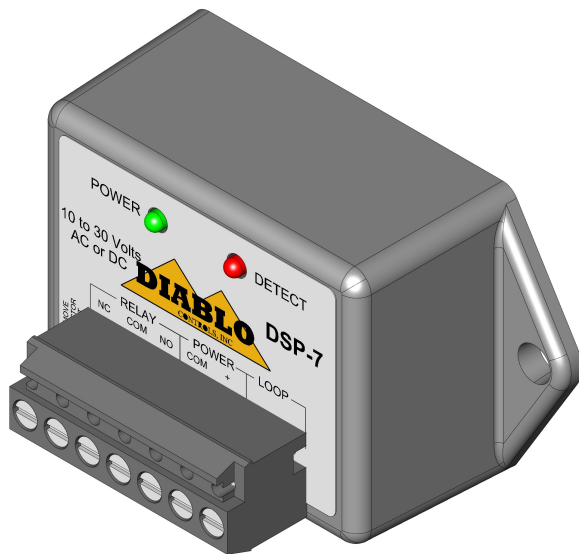

Loop Inductance: 20 μ H to 1500 μ H

Operating Temperature: -35°F to 165°F (-37°C to 74°C)

Operating Voltage: 10 to 30 volts AC or DC, approx. 35 mA when not in detect.

Enclosure: Impact resistant, high temperature plastic.

Dimensions: 1.52" (H) x 2.90" (W) x 1.56" (D)
38.61 mm (H) x 73.66 mm (W) x 39.62 mm (D)

Output Ratings: Relay Outputs - 1 amp @ 125VAC maximum.

INDICATORS



2525 NE COLUMBIA BLVD | PORTLAND, OR 97211
SERVICE 503.595.4716 | INSIDE SALES 503.946.1261 | TOLL FREE 1-888.813.6772

"SERVING THE PORTLAND/VANCOUVER METRO AREA SINCE 1984"