



# 1000 POWER INVERTER & BACKUP SYSTEM



## NO POWER NO PROBLEM

- Provides backup AC power for Access Control Systems when primary (AC) power is lost
- Pure sine wave inverter provides 120 volt, 60 cycle AC power
- Maintains power to all components of the Vehicular Gate System including the Gate Operator, Loop Detectors, Secondary Entrapment Prevention Devices, Telephone Entry System, Card Access System, RF Controls, etc.
- 2-Year Limited Factory Warranty - Excludes batteries


RESIDENTIAL • GATED COMMUNITIES •  
SELF STORAGE • APARTMENT COMPLEXES  
• MIXED USE • PARKING • CONDOMINIUM/  
RESIDENCE HALL • COMMERCIAL



**Two 35 Amp Hour**  
SLA Batteries fit inside the cabinet



**Battery Charger**  
during normal operation



**Converts**  
12 Volt DC to 120 Volt AC




**Power Backup**  
for a single-gated Access Control  
System when primary AC power fails

ACCESS CONTROL SOLUTIONS



# 1000 POWER INVERTER & BACKUP SYSTEMS

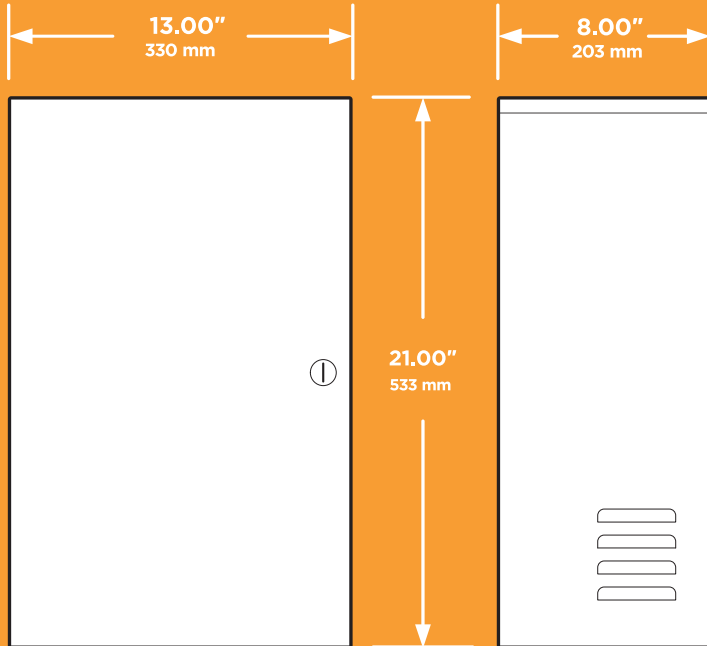

## TECHNICAL FEATURES

### MECHANICAL

Pure Sine Wave Inverter can be used to power a single Gate Operator with a 1 HP motor, or 2 Gate Operators with 1/2 HP motors, and Access Control Systems

Low Battery Alarm: 10.5 V

Low Battery Shutdown: 9.5 V

Overload Protection

Input Short Protection

Over Temperature Control (140°F / 60°C)

LED Status Indicators

Status Report Capability

### Control Circuit

Selectable Power Out and Power Start Options

Continuous Operation / Quick Open Operation

Low Battery Shutdown and Operate Options

2 Relays

### ELECTRICAL

Continuous Power: 1000 Watts

Efficiency: 90%

Max AC Load Current:  
Pure Sine Wave = 12.5 A

DC Input: 10 to 15 VDC  
Nominal 12 VDC

Frequency: 60 Hz

AC Output Voltage: 120 VAC

### Batteries

Maintenance Free, Rechargeable, Non-spillable, Sealed Lead-Acid (SLA), 12-Volt, 35.0 AH

Pure Sine Wave Inverter includes 2 batteries (wired in parallel)

Cabinet contains room for two Batteries

### MISCELLANEOUS

Environmental: 32°F to 104°F (0°C to 40°C)

With two 35 aH Batteries approximately 83 lb (37.65 kg)



## 1000

|                    |                                                 |
|--------------------|-------------------------------------------------|
| OUTPUT WAVE FORM   | Pure Sine Wave                                  |
| WATT               | 1000                                            |
| BATTERIES INCLUDED | 2 SLA 35 aH                                     |
| POWERS             | Two 1/2 HP operator<br>or<br>One 1 HP operator* |
| OUTPUT             | 120 VAC, 60 Hz                                  |

\* Suitable for use with all DoorKing and non-DoorKing brand Operators.

## DoorKing® Inc.

Access Control Solutions since 1948



120 S. Glasgow Avenue,  
Inglewood, California 90301 U.S.A.  
Tel: 310-645-0023 FAX: 310-641-1586  
www.doorking.com

© 2021 All Rights Reserved.  
Product specifications may  
change without notice. Rev. 5/21



### MEMBER:



### DISTRIBUTED BY: