



6006 VEHICULAR SWING GATE ACTUATOR



Solar Powered Control Box

AC Powered Control Box

Aesthetically pleasing original quiet design

- Mounts directly on gate and gate post – simplifying installation and eliminating the need for concrete pads
- Battery Backup provides uninterrupted operation if primary (AC) power is lost
- Includes Photo-cell for entrapment prevention
- 115 VAC or 24 VDC Solar Powered Control Box options
- 2-Year Limited Warranty

• RESIDENTIAL • LIGHT COMMERCIAL •



Fully Enclosed

Screw drive protects screw threads



Easy Install

Rear bracket pivots allowing the unit to be removed easily



Keyed Release

For manual operation




Reliability

In a compact and simple to install design

ACCESS CONTROL SOLUTIONS



6006 VEHICULAR SWING GATE OPERATOR

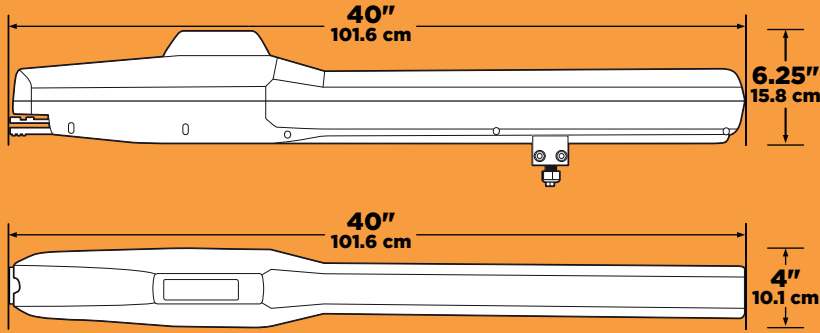

AC Standard Control Box

12.5" W x 16.5" H x 4.25" D
(318mm W x 419mm H
x 108mm D)

AC Deluxe Control Box

14.5" W x 24" H x 4.25" D
(368mm W x 610mm H
x 108mm D)

Solar Powered Control Box

13" W x 21" H x 8" D
(330mm W x 533mm H
x 203mm D)

6006	ACTUATOR	AC POWERED CONTROL BOX(S)	SOLAR POWERED CONTROL BOX
CLASS OF OPERATION	I, II	-	-
MAX WEIGHT AND GATE LENGTH*	600 lbs (272.1kg) / 18 ft (5.48m) 800 lbs (362.8kg) / 16 ft (4.87m) 1600 lbs (725.7kg) / 8 ft (2.43m)	-	-
MOTOR	Continuous Duty DC Motor	-	-
BATTERIES	-	Two (2) 3.5 Ah included	Two (2) 18 Ah or 35 Ah
SOLAR PANEL	-	N / A	10 Watt (18 Ah batteries) 20 Watt (35 Ah batteries)
INPUT POWER	24 VDC	115 VAC	24 VDC

* Assumes gate to be in good condition and swinging in a level plane.

TECHNICAL FEATURES

MECHANICAL

Primary Reduction: worm gear 1:27
Speed: 90° in approximately 18-20 secs.
Maximum Opening: 110°
Case: 3.5mm double painted aluminum
Easily adjustable magnetic limits
Left or right hand mounting
Keyed Release provided
Fail-Secure mechanical
Control Box enclosure rated NEMA 4X
Protection Class IP54

ELECTRICAL

Built-in Battery Charger
Gate Overlap feature for dual gate operation
Magnetic Lock Power Circuit
(115 VAC Control Box only)
Built-in Reset and Test Buttons
Maximum Run Timer
Built-in High Current Warning
0.0 A SBPD Circuit
(Pat Pend) (Solar Control Box only)

MISCELLANEOUS

Environmental: 32°F to 115°F (0°C to 46°C) *

* The temperature range shown is for optimal battery performance. While these systems will operate beyond these limits, exceeding the temperature range will reduce battery efficiency and may cause permanent battery damage.

Shipping Weights:

Actuator: Approx 20 lb (9.1 kg)
Std Control Box: Approx 30 lb (13.6 kg)
Deluxe Control Box: Approx 40 lb (18.14 kg)

Solar Control Box w/18 Ah Batteries:
Approx 60 lb (27.22 kg)

Solar Control Box w/35 Ah batteries:
Approx 90 lb (40.82 kg)

Solar Control Box (No Batteries):
Approx 30 lb (13.6 kg)

Actuator will not run without entrapment protection device(s) connected to the controller board.



Conforms To ANSI/CAN/UL 325:2017 Ed. 7
Certified To CSA C22.2 #247

DoorKing® Inc.

Access Control Solutions since 1948



120 S. Glasgow Avenue,
Inglewood, California 90301 U.S.A.
Tel: 310-645-0023 FAX: 310-641-1586
www.doorking.com

© 2021 All Rights Reserved.
Product specifications may
change without notice. Rev. 2/21



MEMBER:



DISTRIBUTED BY: