

SUBMITTAL	ITEM TYPE	TITLE
SAFETIES	PHOTO EYES	EMX IRB-RET2



FEATURES:

Operating Range:

5 (1.5 m) to 60 ft (18.3 m)

Power:

6-40 VDC, 12-24 VAC

Temperature Range:

-30° to 140°F (-34° to 60°C)

Current (NC and 10K Monitoring Methods)

50 mA DC (relay activated)

Current (Pulse Monitoring Methods)

15 mA DC

Resistive Termination

10K ohm across NO contact (switch selectable)

Surge Protection

Thermal fuse, MOV

Relay Output Operation

Light ON/Dark ON

Response Time

250ms

Environmental


NEMA 4X

Dimensions (L x W x H)

5.1" (130 mm) x 3.15" (80 mm) x 5.5" (140 mm)

Ball Joint Mount Conduit Thread

½ Inch NPT

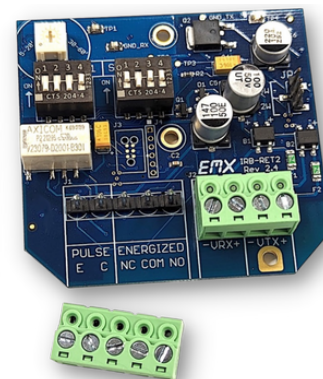

UL325 MONITORING METHODS

- NORMALLY CLOSED
- 10K RESISTIVE TERMINATION
- 2-WIRE PULSE (2 FREQUENCY)
- 2-WIRE PULSE (3 FREQUENCY)
- 4-WIRE PULSE (2 FREQUENCY)
- 4-WIRE PULSE (3 FREQUENCY)

THE PHOTO CELL WILL NEED TO BE WIPED OFF DURING RAIN/ FOG/ FROST.
MOISTURE OR EXCESSIVE LIGHT NEEDING TO BE BLOCKED DURING HEAVY
SUN SETTING/ RISING ARE NOT COVERED UNDER WARRANTY.



2525 NE COLUMBIA BLVD PORTLAND, OR 97211
SERVICE 503.595.4716 | INSIDE SALES 503.946.1261 | TOLL FREE 1.800.813.6772

"SERVING THE PORTLAND/ VANCOUVER METRO AREA SINCE 1984"