

SUBMITTAL	ITEM TYPE	TITLE	LAST UPDATED
STANDARD EQUIPMENT	PHOTO EYES	E-960-D90Q	APRIL 22, 2019

ENFORCER E-960-D90Q LONG RANGE PHOTOBEAM DETECTORS

EASY-TO-INSTALL WITH LASER BEAM ALIGNMENT AND PROVIDE EXTENDED RANGE. DESIGNED TO PROVIDE RELIABLE PERIMETER SECURITY BOTH INDOORS AND OUTDOORS

BUILT-IN LASER BEAM ALIGNMENT SYSTEM SPEEDS ACCURATE, RELIABLE POSITIONING


TWIN INFRARED BEAMS PROVIDE RELIABLE PERIMETER SECURITY, MINIMIZING FALSE ALARMS FROM FALLING LEAVES, BIRDS, ETC. LENSED OPTICS REINFORCE BEAM STRENGTH & PROVIDE EXCELLENT IMMUNITY TO FALSE ALARMS DUE TO RAIN, SNOW, MIST, ETC. WEATHERPROOF, SUNLIGHT-FILTERING CASE FOR INDOOR & OUTDOOR USE

ANTI-FROST SYSTEM SO THAT BEAM FUNCTIONS EVEN IN EXTREME CONDITIONS

AUTOMATIC INPUT POWER FILTERING WITH SPECIAL NOISE REJECTION CIRCUITRY
NC/NO ALARM OUTPUT
N.C. TAMPER CIRCUIT INCLUDED
NON-POLARIZED POWER INPUTS QUICK,

EASY INSTALLATION WITH BUILT-IN LASER BEAM ALIGNMENT SYSTEM

INTERRUPTION TIME ADJUSTABLE FOR NEARLY ALL SITUATIONS

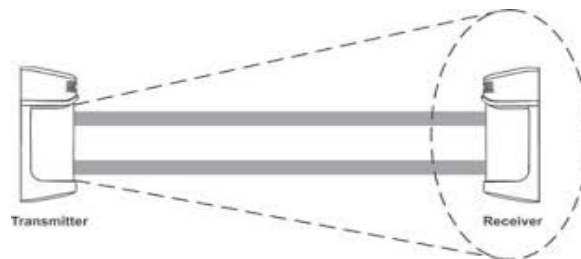

TYPE TWIN PHOTOBEAM DETECTORS WITH LASER BEAM ALIGNMENT

CURRENT DRAW: 64MA MAX.
SENSING RANGE:

OUTDOOR: 90' (30M)

INDOOR: 190' (60M)

OPERATING VOLTAGE
10~30VAC/VDC (NON-POLARIZED)

INTERRUPT SPEED
50MSEC~700MSEC (VARIABLE)

LEDs - RED ON INDICATES TRANSMITTER AND RECEIVER NOT ALIGNED OR BEAM IS BROKEN

LEDs - YELLOW ON INDICATES WEAK RECEIVER SIGNAL OR BEAM IS BROKEN

LEDs - GREEN ON INDICATES UNIT CONNECTED TO POWER

DETECTION SYSTEM
SIMULTANEOUS BREAK OF 2 BEAMS

ALARM OUTPUT NO/NC RELAY, 1A @ 120VAC, MIN. 1 SEC.

TAMPER OUTPUT NC. SWITCH, 1A@120VAC

LASER WAVELENGTH 650NM

OPERATING TEMPERATURE
-13°~+131° F (-25°~+55° C)
LASER OUTPUT POWER 5MW

ALIGNMENT ANGLE HORIZONTAL
(+/-)90°, VERTICAL: (+/-)5°

WEIGHT 2.5 LBS. (1.1KG)



2525 NE COLUMBIA BLVD | PORTLAND, OR 97211
SERVICE 503.595.4716 | INSIDE SALES 503.946.1261 | TOLL FREE 1-888.813.6772

"SERVING THE PORTLAND/VANCOUVER METRO AREA SINCE 1984"