



exacqVision^{EL-S}



exacqVision EL-S

Compact, Reliable, Energy-Efficient **Hybrid** NVR Appliance

- **True Hybrid** – Any combination of analog and IP cameras from all of the leading camera vendors. Standard resolution or megapixel, even the latest H.264 compression IP cameras. Use existing analog cameras today and add up to 16 IP cameras with exacqVision Start and up to 24 IP cameras with exacqVision Pro.
- **8 & 16 Analog Input Versions** – 8 analog inputs with matching loop-thru or 16 analog inputs.
- **High Reliability** – Linux OS operating on a flash drive ensures unit keeps functioning and alerts you of hard drive failures.
- **Enterprise Class Storage** – 2TB storage on two front-loading, removable enterprise-class disk drives.
- **Efficient File Size** – Uses leading-edge H.264 video compression on all analog channels.
- **Compact Chassis** – Professional compact chassis with optional rackmount kit (1.5U). Stack units for high camera counts.
- **Energy Efficient** – Reduced energy footprint and lower lifetime operating cost through energy efficient, cool operation design. Thermally-optimized chassis ensures cool operation and high reliability.
- **High Performance** – Intel® Atom™ and Intel® Core™ i3 processor provides high performance with low power consumption and heat generation.
- **Low Cost** – One of the least expensive, true hybrid systems to purchase and operate on the market today.
- **Intuitive exacqVision Software** – All of the features of exacqVision are available on this unit. Use as an inexpensive stand-alone system, or as part of a large enterprise system.
- **Pro or Start Ready** – Pre-configured with exacqVision Pro or cost-efficient exacqVision Start VMS software.
- **Cross-Platform Client** – View, search and administer with the exacqVision client software on Windows, Linux and Macintosh.
- **3-3** – 3-year warranty on hardware and a 3-year Software Subscription Agreement (SSA) included for software updates.
- **Mobile Access** – Access video with web browsers and mobile devices with Internet access.



Download the complimentary exacq Mobile app available for Apple® iPhone®, iPad™ and Android devices.

PART NUMBERS

exacqVision Professional Preconfigured with exacqVision Pro VMS software
Includes 3-year warranty & 3-year SSA

0800-24-0250-ELS - 8 channel, 240 ips @ D1, 250 GB HDD
0800-24-0500-ELS - 8 channel, 240 ips @ D1, 500 GB HDD
0800-24-1000-ELS - 8 channel, 240 ips @ D1, 1 TB HDD
0800-24-2000-ELS - 8 channel, 240 ips @ D1, 2 TB HDD
1600-24-0250-ELS - 16 channel, 480 ips @ D1, 250 GB HDD
1600-24-0500-ELS - 16 channel, 480 ips @ D1, 500 GB HDD
1600-24-1000-ELS - 16 channel, 480 ips @ D1, 1 TB HDD
1600-24-2000-ELS - 16 channel, 480 ips @ D1, 2 TB HDD
EVIP-01 - Single exacqVision Pro IP camera license


exacqVision Preconfigured with exacqVision Start VMS software
Includes 3-year warranty & 3-year SSA

0800-24-START-0250-ELS - 8 channel 240 ips @ D1, 250 GB HDD
0800-24-START-0500-ELS - 8 channel, 240 ips @ D1, 500 GB HDD
0800-24-START-1000-ELS - 8 channel, 240 ips @ D1, 1 TB HDD
0800-24-START-2000-ELS - 8 channel, 240 ips @ D1, 2 TB HDD
1600-24-START-0250-ELS - 16 channel, 480 ips @ D1, 250 GB HDD
1600-24-START-0500-ELS - 16 channel, 480 ips @ D1, 500 GB HDD
1600-24-START-1000-ELS - 16 channel, 480 ips @ D1, 1 TB HDD
1600-24-START-1000-ELS - 16 channel, 480 ips @ D1, 2 TB HDD
START-01 - Single exacqVision Start IP camera license

TECHNICAL SPECIFICATIONS

exacqVision^{EL-S}

Recording Resolution (Analog)	CIF: 352x240 NTSC / 352x288 PAL 2CIF: 720x240 NTSC / 720x288 PAL 4CIF (D1): 720x480 NTSC / 720x576 PAL
Frame Rate (Analog)	EL-SR 8: 240/200 IPS D1/2CIF/CIF (30/25 IPS/camera) EL-SR 16: 480/400 IPS D1/2CIF/CIF (30/25 IPS/camera)
Compression (Analog)	H.264 or MJPEG hardware compression
Alarm Inputs	4 TTL inputs
Alarm Outputs	2 TTL outputs and 1 relay output
Video Inputs (Analog)	EL-S 8: 8 BNC inputs plus 8 BNC loop-thru EL-S 16: 16 BNC inputs
Video Inputs (IP)	exacqVision Pro: Up to 24 IP camera inputs exacqVision Start: Up to 16 IP camera inputs
Video Outputs (Analog)	1 BNC
Audio Inputs	4 inputs on server + IP camera audio
Serial Connections	RS-485 PTZ port, RS-232 port
NIC	1 Gbit 1000Base T RJ-45
USB2 Ports	6 (2 front, 4 rear)
RAM	1 GB
Hard Drive Storage	250, 500, 1000 or 2000 GB, enterprise-class hard drive
Sustained HD Throughput	18 MB/sec
VGA Output	1 VGA (DB15)
Processor	Intel® Atom™ or Intel® Core™ i3
Keyboard & Mouse	Included
DVD/CD/RW	Included
Watchdog Timer	Included
Operating System	Linux (Ubuntu embedded on 4GB flash drive)
VMS Server Support	exacqVision Pro + Enterprise Server option, exacqVision Pro, exacqVision Start
Compatible Client OS Support	Windows (7, Vista, XP, Server 2003, Server 2008) - 32-bit or 64-bit, Linux (Ubuntu), Mac OS X
Regulatory	CE (Class A), FCC (Class A)
Warranty	3 & 3 -3 years, parts & labor plus 3 years SSA included
Dimensions (LxWxH)	15 x 17 x 2.5 (1.5U) inches / 38.1 x 43.2 x 6.4 cm
Weight	11.45 lbs. / 5.2 kg
Operating Temperature	40° - 95° F (4.5° - 35° C)
Relative Humidity	5 - 95% RH (non-condensing)
Input Voltage	120/240 VAC auto-sensing
Power Consumption	35W maximum

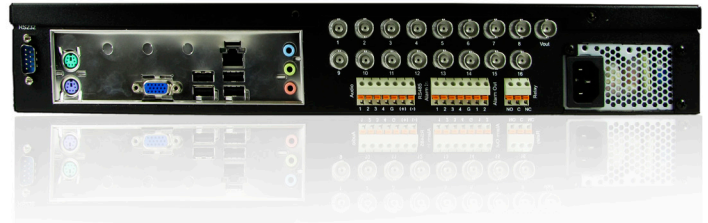

exacqVision^{EL-Series}

The Complete Line of exacqVision EL-Series Servers:

IP Camera Servers - EL-mini • EL-ip • EL-toaster

Hybrid Servers - EL-S • EL-SR

exacq[®]
Technologies

www.exacq.com



+1.317.845.5710
+5255.56080817
+44.1438.310163
+31.485.324347

USA (Corporate Headquarters)
Mexico
United Kingdom
Europe