

SUBMITTAL	ITEM TYPE	TITLE
GATE AUTOMATION	DUAL SWING GATE OPERATOR	HYSECURITY HYDRASWING 40F TWIN



OVERVIEW

MODEL

HYDRASWING 40F TWIN MAX

GATE LENGTH

16FT/ PER LEAF

MAX WEIGHT

4,000 LBS/ PER LEAF

OPEN/ CLOSE TIME

10/15 SECONDS

TEMPERATURE

-40° to 158° F (-40° to 70° C)

WARRANTY

5 YEARS

ETL LISTED UL35

SPECIFIC TO LOCATION

I, II, III, IV AVAILABLE

VOLTAGE


208/230V

HORSEPOWER

2HP

CONTROLS

SMART TOUCH CONTROLLER

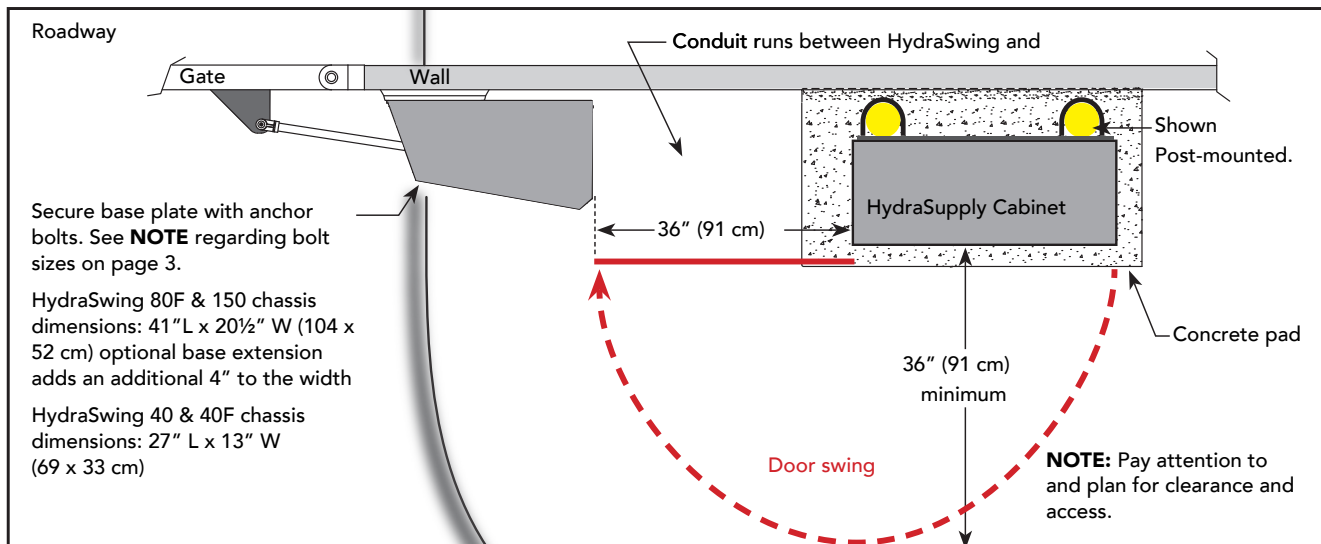

2525 NE COLUMBIA BLVD PORTLAND, OR 97211
SERVICE 503.595.4716 | INSIDE SALES 503.946.1261 | TOLL FREE 1.800.813.6772

"SERVING THE PORTLAND/ VANCOUVER METRO AREA SINCE 1984"

SUBMITTAL	ITEM TYPE	TITLE
GATE AUTOMATION	INCOMING POWER WIRE REQUIREMENTS	WIRING CHART HYDRASWING

HydraSwing Wiring Chart (Incoming Power)

The maximum distance shown is from the operator to the power source, assuming that source power is from a panel box with adequate capacity to support the addition of this motor load. The values are for one operator, with no other loads applied to the branch circuit. Avoid placing more than one operator to a circuit, but if you must, be certain to reduce the maximum allowed wire distance by half.

NOTE: HydraSwing gate operators connected for 1Ø operation will draw more current because the utility power to run the machine will be carried to the operator on two wires instead of the three used for 3Ø operators. Be sure to allow for this difference when specifying wire size.

Make sure proper wiring is being used. The following table shows the maximum allowable wire run from the power source to the operator for various wire sizes. Performance of VFD operators on 1Ø and 3Ø 50\60 Hz Power.

NOTE: Distance shown in U.S. Standard "feet." Metric equivalent shown in parentheses.

HydraSwing VFD Wire Size Chart						
Phase Ø	1	1	3	3	3	3
Voltage	208	230	208	230	380	460
Horsepower	2	2	2	2	2	2
VFD Rating Amps	17.4	17.4	8.7	8.7	5.2	5.2
Wire Gauge	Distance	Distance	Distance	Distance	Distance	Distance
12	90 (27m)	100 (30m)	220 (67m)	240 (73m)	680 (207m)	830 (253m)
10	150 (46m)	170 (52m)	350 (107m)	390 (119m)	1090 (332m)	1310 (399m)
8	240 (73m)	270 (82m)	560 (171m)	620 (189m)	1730 (527m)	2100 (640m)
6	390 (119m)	430 (131m)	900 (274m)	990 (302m)	2750 (838m)	3330 (1015m)
4	620 (189m)	680 (207m)	1430 (436m)	1580 (482m)	4380 (1335m)	5300 (1615m)
2	990 (302m)	1090 (332m)	2280 (695m)	2530 (771m)	6990 (2130m)	8470 (2582m)



2525 NE COLUMBIA BLVD | PORTLAND, OR 97211
 SERVICE 503.595.4716 | INSIDE SALES 503.946.1261 | TOLL FREE 1-888.813.6772

"SERVING THE PORTLAND/VANCOUVER METRO AREA SINCE 1984"