

SUBMITTAL	ITEM TYPE	TITLE
GATE AUTOMATION	SLIDE GATE OPENER	HYSECURITY SLIDEDRIVER II SD15



OPERATOR OVERVIEW

MODEL:

SLIDEDRIVER II SD15

GATE LENGTH MAX:

LIMITED ONLY BY WEIGHT

GATE WEIGHT MAX:

1500LBS

RATE OF TRAVEL:

1 FT' PER SECOND

TEMPERATURE:

-40°F TO 158°F

WARRANTY:

5 YEAR

ETL LISTED UL35:

SPECIFIC TO LOCATION: I, II, III, IV
AVAILABLE

VOLTAGE:

230VAC 1 PHASE

460 VAC 3 PHASE


HORSEPOWER POWER:

1 HP



USER CONTROLS

SMART TOUCH CONTROLLER, FULL SYSTEM COMPATIBLE

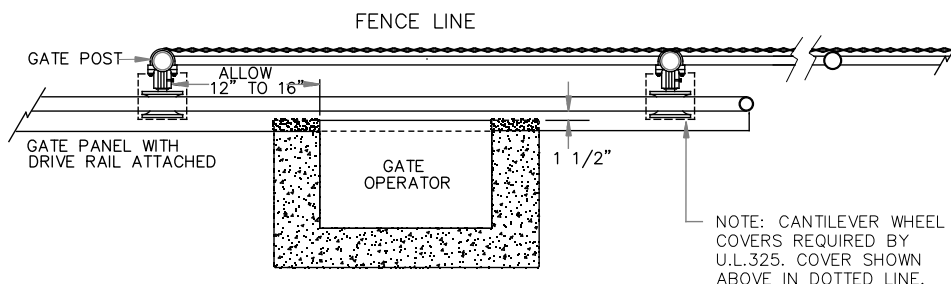

NOTE: CANTILEVER WHEEL
COVERS REQUIRED BY
U.L.325. COVER SHOWN
ABOVE IN DOTTED LINE.



2525 NE COLUMBIA BLVD | PORTLAND, OR 97211
SERVICE 503.595.4716 | INSIDE SALES 503.946.1261 | TOLL FREE 1-888.813.6772

"SERVING THE PORTLAND/VANCOUVER METRO AREA SINCE 1984"

SUBMITTAL	ITEM TYPE	TITLE
GATE AUTOMATION	INCOMING POWER WIRE REQUIREMENTS	WIRING CHART SD15 & SD40

SLIDEDRIVER II WIRING CHARTS (INCOMING POWER)

The maximum distance shown is from the operator to the power source, assuming that source power is from a panel box with adequate capacity to support the addition of this motor load. The values are for one operator, with no other loads applied to the branch circuit. Avoid placing more than one operator to a circuit, but if you must, be certain to reduce the maximum allowed wire distance by half.

Make sure proper wiring is being used. The following table shows the maximum allowable wire run from the power source to the operator for various wire sizes. Performance of SD50F-series operators on 1Ø and 3Ø, 50 or 60 Hz Power.

Note: Distance shown in U.S. Standard "feet." Metric equivalent shown in parentheses.

SlideDriver II Wire Size Chart – SD15 and SD40						
Phase Ø	1	1	1	3	3	3
Voltage	115	208	230	208	230	460
Horsepower (Hp)	1	1	1	1	1	1
Maximum Rated Current Draw (A)	15.6	8.8	8.5	6.3	6.1	3.7
Wire Gauge	Distance	Distance	Distance	Distance	Distance	Distance
12	35 (11 m)	115 (35 m)	125 (38 m)	300 (91 m)	340 (104 m)	1135 (346 m)
10	55 (17 m)	185 (56 m)	205 (62 m)	475 (145 m)	545 (166 m)	1800 (549 m)
8	90 (27 m)	290 (88 m)	320 (98 m)	750 (229 m)	860 (262 m)	2835 (864 m)
6	140 (43 m)	450 (137 m)	500 (152 m)	1170 (357 m)	1340 (408 m)	4415 (1346 m)
4	220 (67 m)	705 (215 m)	780 (238 m)	1825 (556 m)	2085 (636 m)	6875 (2096 m)
2	335 (102 m)	1085 (331 m)	1200 (366 m)	2800 (853 m)	3200 (975 m)	10555 (3217 m)



2525 NE COLUMBIA BLVD | PORTLAND, OR 97211
 SERVICE 503.595.4716 | INSIDE SALES 503.946.1261 | TOLL FREE 1-888.813.6772

"SERVING THE PORTLAND/VANCOUVER METRO AREA SINCE 1984"