


SUBMITTAL	ITEM TYPE	TITLE
ENCLOSURES	WEATHERPROOF ENCLOSURE 18 x 16 x 8	L-COM NB181608-1HFS-UL

FEATURES

- MOLDED FIBERGLASS REINFORCED POLYESTER
- STAINLESS STEEL QUICK RELEASE LATCHES WITH PADLOCK HASPS
- NEMA 3R, 3RX/ IP24 RATED
- FULLY GASKETED LID WITH REMOVABLE FILTERS & INTEGRAL MOUNTING FLANGE
- ALUMINUM MOUNTING PLATE W/ SURGE PROTECTED DUPLEX 120 VAC OUTLETS & THERMOSTAT CONTROLLED HEATING & COOLING SYSTEM

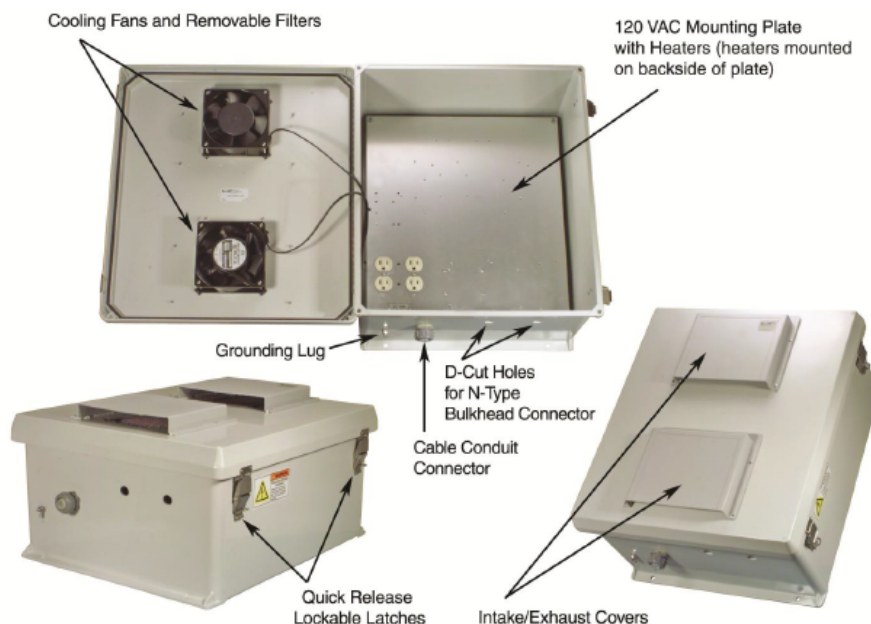

Specifications

Enclosure Material	Fiberglass Reinforced Polyester
Enclosure Color	Machine Tool Gray
Voltage	120 VAC
Heater Power	200 Watts each (400 Watts total)
Fan Power	12 Watts each (24 Watts total)
Mounting Plate Material	.10 in. (2.5mm) Thick Anodized Aluminum
Mounting Plate Dimensions	16.8 x 14.8 inches (42.6 x 37.5 cm)
Weight	21.8 lbs (9.9 kg)
Outside Dimensions (max)	19.5 x 17.5 x 10 inches (49.5 x 44.4 x 25.4 cm)
Inside Dimensions	17.7 x 15.7 x 8.5 inches (44.9 x 39.9 x 21.6 cm)
Flame Rating	UL 94-5V
RoHS Compliant	Yes
Cable Feed	1/2" Cable Conduit Connector
Ratings	NEMA Type 3R, 3RX / IP24

Temperature Controller Specification	
Fan Setpoint Temperature	+34° C (+93° F)
Heater Setpoint Temperature	-9° C (+16° F)
Hysteresis Window	5° C (9° F)
Contact us for custom Fan/Heat Setpoints	



2525 NE COLUMBIA BLVD PORTLAND, OR 97211
SERVICE 503.595.4716 | INSIDE SALES 503.946.1261 | TOLL FREE 1.800.813.6772

"SERVING THE PORTLAND/ VANCOUVER METRO AREA SINCE 1984"