


SUBMITTAL	ITEM TYPE	TITLE	LAST UPDATED
STANDARD ITEM	SWING GATE OPERATOR	ELITE CSW-24UL	March 4, 2019

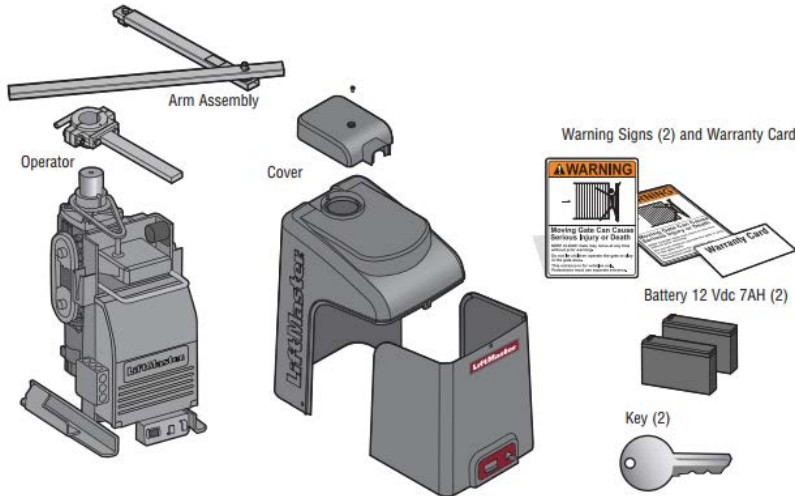

OPERATOR OVERVIEW

MODEL:

CSW-24UL

GATE LENGTH MAX:

DEPENDANT ON WEIGHT

GATE WEIGHT MAX:

1200LBS @ 12' | 800LBS @ 16' | 600LBS @ 18'

RATE OF TRAVEL:

13 SECONDS TO 90° OPEN

TEMPERATURE:

W/O HEATER: -4°F to 140°F (-20°C to 60°C)

W/ OPTIONAL HEATER: -40°F to 140°F (-40°C to 60°C)

WARRANTY:

5 YEAR COMMERCIAL; 7 YEAR RESIDENTIAL

ETL LISTED UL35:


SPECIFIC TO LOCATION: I, II, III, IV AVAILABLE

USER CONTROLS:

BUILT IN RADIO RECEIVER, FULL SYSTEM COMPATIBLE

RECOMMENDED CAPACITIES

Rated for gates up to 18 ft. in length or weighing up to 1,600 lbs.

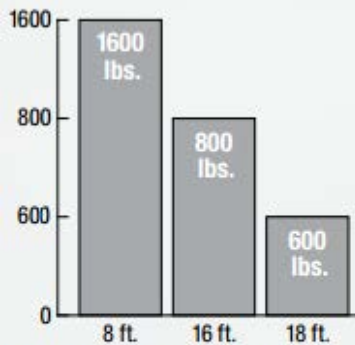

BATTERY BACKUP OPERATION

BATTERY	CYCLES	STANDBY TIME
(2) 7Ah	146	24 Days
(2) 33Ah	876	105 Days



POWER SPECS:

VOLTAGE:

INPUT: 4 AMPS AT 120 VAC

ACCESSORY POWER:

INPUT: 6 AMPS AT 120 VAC

MAIN AC SUPPLY:

120 VAC

MAIN SUPPLY (MOTOR):

24 VDC

HEATER DRAW (OPTIONAL):

325 WATTS (120 VAC ONLY)

DAILY CYCLE RATE AC POWER:

CONTINUOUS

FUSE PROTECTION BATTERY

30 AMP

FUSE PROTECTION DC POWER:

30 AMP

SOLAR POWER MAX:

24 VDC AT 50 WATTS MAX

BATTERY BACKUP:

RUN GATE TO OPEN

RUN GATE UP TO 100 CYCLES

AMERICAN WIRE GAUGE (AWG)	MAXIMUM WIRE LENGTH (120 VAC)	MAXIMUM WIRE LENGTH (240 VAC)
14	130 feet	260 feet
12	205 feet	410 feet
10	325 feet	650 feet
8	520 feet	1040 feet
6	825 feet	1650 feet
4	1312 feet	2624 feet

Use copper conductors ONLY.



2525 NE COLUMBIA BLVD | PORTLAND, OR 97211
SERVICE 503.595.4716 | INSIDE SALES 503.946.1261 | TOLL FREE 1-888.813.6772

"SERVING THE PORTLAND/VANCOUVER METRO AREA SINCE 1984"