

HDSW24UL

# 24VDC HEAVY-DUTY VARIABLE SPEED SWING GATE OPERATOR

Ideal for heavy gate and extreme applications.



**CONTINUOUS-DUTY OPERATION**

**DIRECT DRIVE GEAR BOX AND BRUSHLESS DC MOTOR**  
up to 6 million cycles

**MOVE HEAVY GATES**  
up to 4,500 lbs. or 22 ft. length †

## RELIABLE

**CONTINUOUS-DUTY GATE OPERATION** BUILT WITH A CUSTOM HEAVY-DUTY GEAR BOX, SIZE 80, DIRECT DRIVE 1,600:1 GEAR RATIO.

**CUSTOM 1.5 HP PEAK BRUSHLESS DC MOTOR** DELIVERS UP TO 6 MILLION CYCLES.

**VARIABLE CYCLE SPEED** ADJUSTS TO MEET APPLICATION NEEDS FROM 13 TO 36 SEC. FOR A 90-DEGREE OPENING.

**SMOOTH START/STOP OPERATION** AND MID-TRAVEL REVERSAL EXTEND OPERATOR HARDWARE LIFE.

**STANDARD ARM (INCLUDED)** MOVES GATES UP TO 2,800 LBS.

**CUSTOM REINFORCED LONG ARM (OPTIONAL)** MOVES GATES UP TO 4,500 LBS.

## SMART

**POWERED BY myQ®** FOR FULL INSIGHT AND CONTROL OVER COMMUNITY AND FACILITY ACCESS POINTS. MONITOR AND CONTROL MULTIPLE COMMUNITIES WITH SMART COMMUNITY ACCESS. IMPROVE WAREHOUSE EFFICIENCY AND PRODUCTIVITY WITH SMART FACILITY ACCESS.\*

**FOUR PROGRAMMABLE AUXILIARY RELAYS** ACCOMMODATE MORE ACCESSORIES.

**WIRELESS DUAL-GATE COMMUNICATION** SYNCHRONIZES GATE OPERATION AND ELIMINATES COSTLY TRENCHING; SET SPEED INDEPENDENTLY IF NEEDED.

## SAFE AND SECURE

**QUICK CLOSE AND ANTI-TAILGATE** QUICKLY SECURES PROPERTY, PREVENTING UNAUTHORIZED ACCESS.

**POSILOCK®** AUTOMATICALLY CLOSES THE GATE WHEN IT IS PUSHED FROM THE CLOSED LIMIT.

**UL® LISTED** GATE OPERATOR WITH MONITORED SAFETY ENTRAPMENT PROTECTION DEVICE.

\*When linked with an access control powered by myQ. Cellular data or Wi-Fi® connection required. Test equipment regularly and follow safety instructions.

† Optional Reinforced Long Arm must be used to move 4,500 lb. or 22 ft. gates.

### INCLUDED ACCESSORIES:

#### MONITORED RETRO-REFLECTIVE PHOTO EYE

Reliable retro-reflective photo eye with heater and wide beam, engineered to stay aligned; max. range: 50 ft.



LMRRUL

### OPTIONAL & SAFETY ADD-ONS:

#### REINFORCED LONG ARM

For heavy gate applications of 2,500–4,500 lbs., 14–22 ft.

HDLGARM

#### MONITORED THROUGH-BEAM PHOTO EYES

Reliable through-beam with wide beam and heater for high performance in most environments; max. range: 90 ft.



LMTBUL

#### MONITORED WIRELESS EDGE KIT

Low-energy Bluetooth® connection between a LiftMaster® Monitored Resistive Edge and the gate operator; max. range: 130 ft.



LWMEKITU

#### MONITORED RESISTIVE EDGES

Full line of Small and Large Profile Edges that sense obstructions.



EDGES

### TOTAL SOLUTION ACCESSORIES:

#### CONNECTED ACCESS PORTAL WITH VIDEO

Cloud-based access control for residential communities.



CAPXLV

#### PLUG-IN LOOP DETECTOR

Prevents the gate from closing on a vehicle in the path; power efficient for maximum cycles on Battery Backup.



LOOPDETLM

#### INTERNET GATEWAY

Connects myQ-enabled gate operators to the Internet and enables control through the myQ app and communication to Access Control Systems powered by myQ.



828LM

## PRODUCT GUIDE HDSW24UL

24VDC HEAVY-DUTY VARIABLE SPEED SWING GATE OPERATOR

**LiftMaster®**

## MASTERFUL ENGINEERING.

## MECHANICS



- **24VDC** Brushless Continuous-Duty Motor
- **Operator Duty Rating:** High-Cycle, High-Temperature Continuous-Duty
- **Direct Drive**

## POWER



- **120/240VAC** Single-Phase
- **Accessory Power:** 24VDC 1 A Max. Output; Switched and Unswitched Power
- **Optional Kit (3PHCONV)** to Convert a 3-Phase Input Voltage of 208/240/480/575VAC to an Output Voltage of 120VAC
- **Solar-Ready, Ultra-Reliable System** Delivers Power When and Where You Need It (LMRRUL/LMTBUL Heater Option Not Recommended for Solar Applications)



## COMMERCIAL-GRADE DESIGN


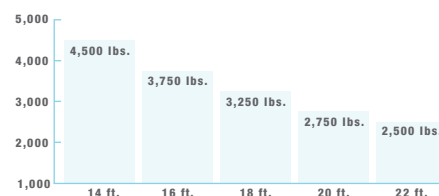


- **Chassis:** Constructed with 1/4 in. Steel, Powder Coated
- **Cover:** High-Density, UV-Resistant Polyethylene 2-Piece Cover for Excellent Heat and Corrosion Resistance
- **Warranty:** 5 Years Commercial, 7 Years Residential
- **UL® Usage Classification:** I, II, III and IV
- **Operator Weight:** 249 lbs.

28.04"

16.37"

19.59"

CAPACITIES  
STANDARD ARMCAPACITIES  
LONG ARM

## TEMPERATURE SPECIFICATIONS



## WITHOUT HEATER

-4°F (-20°C) to 140°F (60°C)

## WITH OPTIONAL HEATER (HTR)

-40°F (-40°C) to 140°F (60°C)

## BATTERY BACKUP OPERATION

| Battery | Cycles | Standby Time |
|---------|--------|--------------|
| 7Ah     | 45     | 120 Days     |
| 33Ah    | 307    | 180 Days     |

(Cycles and Standby Time Based on Stand-Alone System)



## VARIABLE GATE SPEED

13-36 sec for a 90 degree opening

## STANDARD FEATURES.

## INHERENT REVERSING SENSOR

- Detects Obstructions and Reverses Gate

## POSILOCK®

- Automatically Closes the Gate When It Is Pushed from the Closed Limit

## MANUAL DISCONNECT

- Allows Gate to Be Opened Manually When Released

## MONITORED SAFETY INPUTS

- 3 Main Board, 3 Expansion Board

## SECURITY+ 2.0® ON-BOARD RADIO RECEIVER

- Tri-Band 310/315/390 MHz Frequency
- Up to 50 Remote Controls (Unlimited with 811LM/813LM)

## LED DIAGNOSTIC DISPLAY

- Simplifies Installation and Troubleshooting

## PROGRAMMABLE AUXILIARY RELAYS

- 4 Relays Make Adding Additional Features Easy

## HOMELINK® COMPATIBLE

- Version 4.0 or Higher\*

\*May require an external adapter depending on the model and year of your vehicle. Visit [HomeLink.com](http://HomeLink.com) for additional information.

## SUPPORT.

For Support Tools and Training Videos, Visit [LiftMasterTraining.com](http://LiftMasterTraining.com)For More Information on Gate Operators, Visit [LiftMaster.com/UL325Gates](http://LiftMaster.com/UL325Gates)

Sales Support: 800.282.6225

Technical Support Center: 800.528.2806

To Order: 800.323.2276

