

# WIRELESS KEYPAD KPW5

SECTION 28 13 00



## KEY FEATURES

|                             |      |
|-----------------------------|------|
| UNIT INTERFACE CAPABILITIES | PIN  |
| STAND ALONE                 | Yes  |
| WIRELESS COMMUNICATION      | Yes* |

## SPECIFICATIONS

|                                             |                                         |
|---------------------------------------------|-----------------------------------------|
| POWER SUPPLY                                | 9V Lithium Battery (included in carton) |
| PROGRAMMING (DATABASE MANAGEMENT)           | Keypad                                  |
| LOCAL USER CAPACITY                         | 5                                       |
| MAX NUMBER OF GATES/DOORS OF CONTROL (EACH) | 1                                       |
| RELAY OUTPUT                                | 1                                       |
| MOUNTING OPTIONS                            | Surface/gooseneck                       |
| OPERATING TEMPERATURE                       | -4°F to 140°F (-20°C to 60°C)           |
| CAMERA READY                                | No                                      |
| ANTI-TAMPER ALARM                           | No                                      |
| WARRANTY                                    | 1 year                                  |

## CONSTRUCTION

|                    |               |
|--------------------|---------------|
| ENCLOSURE MATERIAL | Polycarbonate |
|--------------------|---------------|

\*When used with LiftMaster® operators with Security+ 2.0® Radio




# WIRELESS KEYPAD KPW5

SECTION 28 13 00


## DIMENSIONS




TOP

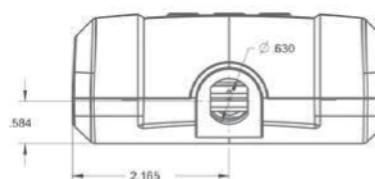


BOTTOM

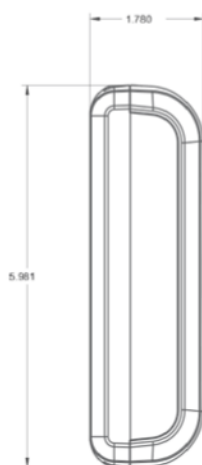


LEFT

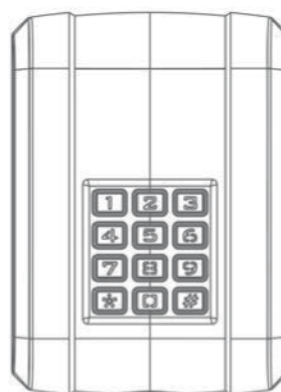

FRONT

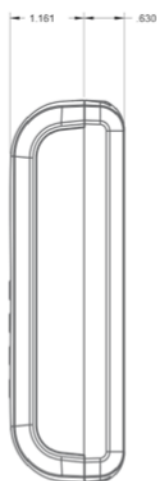

RIGHT

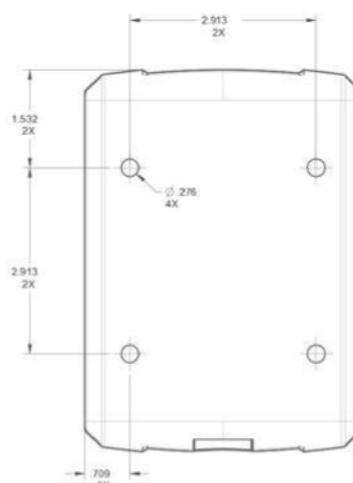

REAR