

SRDRST, SRDRKP and SRDRMM

DATA SHEET

Smart Readers
Section 28 13 00



Key Features

Unit Interface Capabilities

Model SRDRST - Standard Single Gang: None
Model SRDRKP - Standard Keypad - 10-Key keypad
Model SRDRMM - Mullion Mount - None

Communication Capabilities

Mobile BLE; 125 KHz Proximity; 13.56 MHz Smart

Mobile Compatibility

Works with myQ Community app for iOS, Android and AppleWatch

Mobile Credential Range

Dependent on Mode:

Tap: Tap or bring the phone within 3" of the reader

Touch: Phone must be within 2' of the reader and user must physically touch the reader to engage capacitive resistance function

Alert: Alert will pop up on smart phone within 10' of the Reader - press alert on phone to unlock

User Feedback

Tri-state LED light bar (red, green, amber) and audible beeper

Specifications

Connectivity

Dependent on Door Controller: CAPXLV2; CAPXM, CAPXS or CAP2D

Power Supply Voltage

(Power Supply not included)

5-16 V DC

Current

SRDRST - 120 mA average, 170 mA peak

SRDRKP - 145 mA average, 195 mA peak

SRDRMM-105mA average, 145 mA peak

Communications

OSDP Autodetect - communicates with up to 4 Smart Readers with the CAPXLV2 Intercom

OSDP Secure Channel and remote firmware upgradability

Wiegand Input Data Format

26 BIT, 30 BIT, 37 BIT (HID), 37 BIT (Transcore), 32 BIT (MiFare) , 36 BIT Proximity, 56 BIT Smart

Mounting Options

Single Gang, Surface Mount

Operating Temperature

UL® tested -35° to 66°C and EN -40° to 70°C and 95% humidity

Anti-Tamper Notification

Accelerometer-based tamper detection

Warranty

1 year

Construction

Country of Origin

United States

Material

Reader electronics are conformally coated in a silicone water resistant coating

Regulatory

UL294 Compliant

LiftMaster


POWERED BY myQ

SRDRST, SRDRKP and SRDRMM

Smart Readers
Section 28 13 00




Dimensions

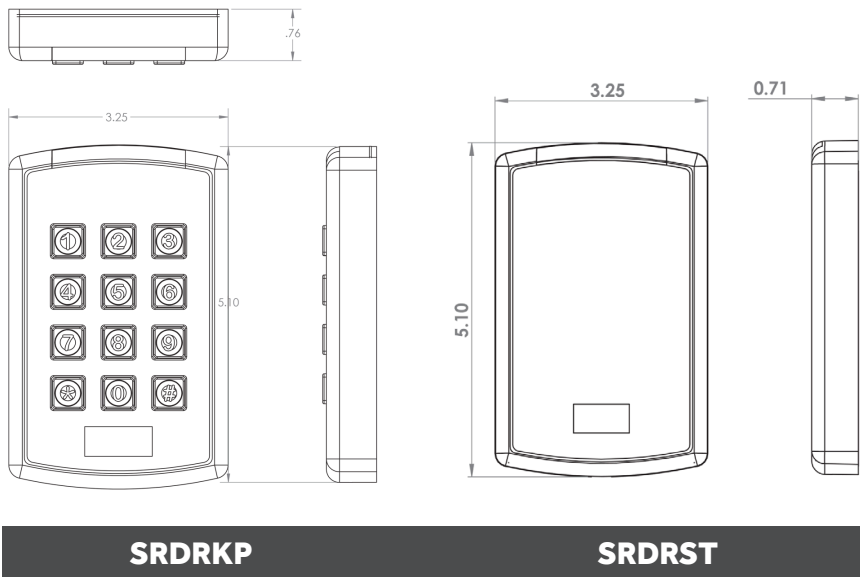

Cable Length Recommendations

Weigand	
Feet	AWG
200	22
300	20
500	18

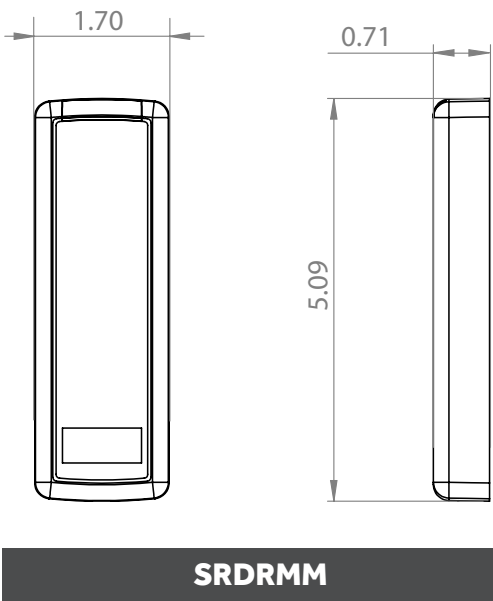

LiftMaster

POWERED BY myQ