



Virtual Loop 2.0

Model number : OVS-02GT

The Virtual Loop 2.0 is a Vehicle Presence Sensor for use on Gates and Barriers.

The advanced Distance Measuring Radar reliably detects vehicles of all sizes while ignoring nearly all human movement. Eliminate all the hassles of installing and servicing in-ground loops and give your customer reliable activation and presence for all their gate applications.



26 Feet Extended Range



No cutting, coring or drilling of concrete or asphalt required



Extremely stable under all types of weather conditions



Presence Detection for all types of vehicles




Can be programmed to ignore or detect humans based on application

Settings via
Smartphone App




Direct conduit
access



Direct installation
for single gang box



Flexible
power supply




Wide angle
adjustment



Improved
built-in heater



Visible
indicator



Longer
detection range



Water
resistance



2 outputs




Improved human
cancellation

Specifications

Name		Vehicle Detection Sensor
Model		OVS-02GT
Detection method		Microwave (FMCW)
Frequency		Microwave: 24GHz, BLE communication: 2.4GHz
Response		Min 500ms
Supply voltage		12 to 24VAC/DC
Power consumption		Heater enabled: Up to 300mA, Heater disabled: Up to 80mA (at 24V)
Output	1	Non-Voltage Relay Output 30VDC 0.3A or less (resistance load)
	2	Non-Voltage Relay Output 30VDC 1A or less (N.O./N.C.)
RS485		n/a
Detection range		6 to 26ft range adjustable
Detectable vehicle speed		1 to 21mph
Application		Gate-activation, protection / count / traffic control
Parameter	Angle	Gate: 90°/45°, Traffic control: 45°, Count: 45°
	Detection area range	6 to 26ft
	Detected sensitivity	Level 1 to 7
	Undetected sensitivity	Level 1 to 7
	Sensitivity boost	OFF / Low / Middle / High
	Sensitivity boost timer [s]	Off / 0.5 / 1 / 2 / 3 / 4 / 5 / 10 / 20 / 40
	Detection response time (min)	Off / 5 / 60 / 180 / ∞
Indicator	ON / OFF	Possible to switch with the app
	Normal operation	Standby: solid green, Detected: solid red, Bad environment: blinking green (slow), BLE connected: solid blue
	Detection area check	Not detected: blinking blue, Pre-detected: blinking green, Detected: blinking red
	Calibration	Calibrating: quick blinking blue, Error: alternate blinking red & blue
	Sensor reset	Reset complete: solid yellow for 2 seconds
Ambient temperature		-22 to 122°F
Operating ambient humidity		95% max.
Degree of protection		IP66
Installation location		Indoor/outdoor, pole mounting (diameter: φ2.56in)
Installation height		18 to 20 in (from the road surface to the bottom of the unit)
Sensor angle adjustment		Left and right: ±93°
Weight		770g (including accessories)
Accessories		Retaining screw x 4, quick manual

Specifications are subject to change without notice for improvement.


Detection Area Diagram

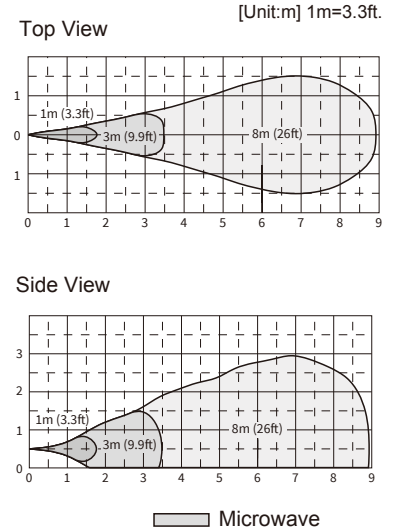


Installation height 0.5m(1.6ft.),
Operation type: Device activation,
Sensitivity: 4,

*Under normal operation, the detection area by an actual vehicle may be smaller.

Dimensions

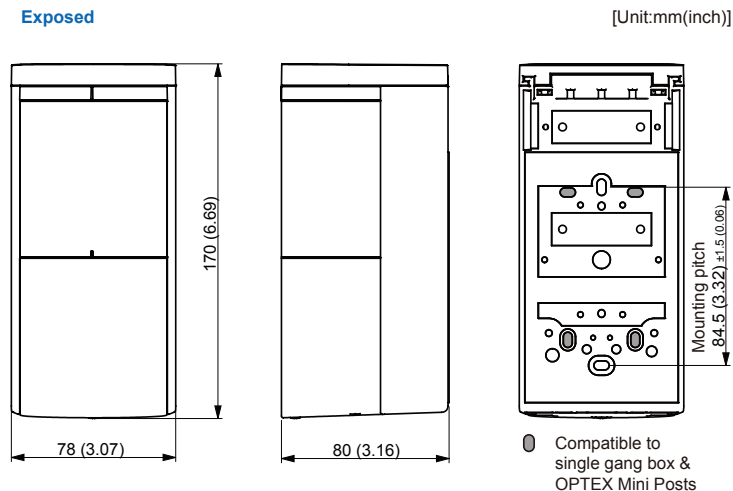

Sensor Installation Conditions

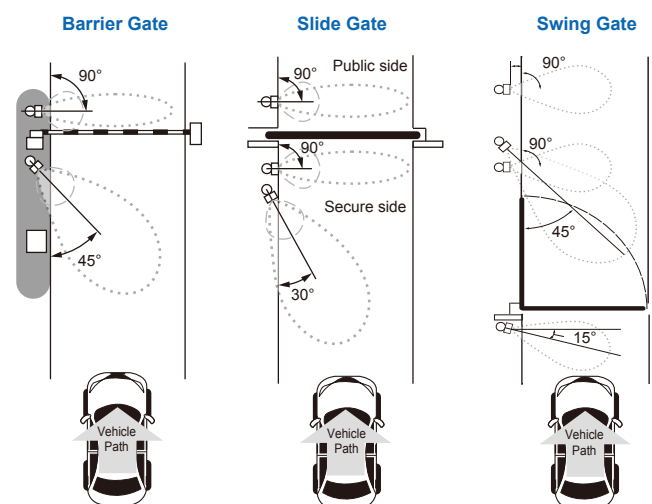

Contact us: 800.966.7839
sales@optexamerica.com

www.optexamerica.com

