


SUBMITTAL	ITEM TYPE	TITLE	LAST UPDATED
KEYPAD	WIRELESS KEYPAD	APEX KEYPAD	AUGUST 22, 2018



FEATURES

- Built-in surge protection
- Support for multiple languages
- Flexible mounting options
- Easy to configure and install
- Seamless integration with FalconXT and StorLogix
- Onboard dual intercom
- Two internal relays
- Four door inputs
- Built-in Wiegand reader

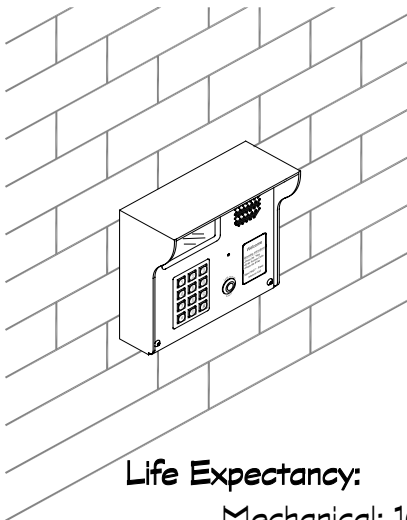

SPECIFICATIONS

Power Supply: Voltage: 12 - 24VDC or 12 - 18VAC

Current Consumption: 300mA Maximum

Relay Outputs (resistive load):

Maximum Switching Voltage: 30VAC/DC

Maximum Switching Current: AC: 10A (NO) / 3A (NC)

DC: 5A (NO) / 3A (NC)

Maximum Switching Capacity: 1250VA (NO)

375VA (NC)

Minimum Permissible Load: 10mA at 5VDC

Contact Resistance: 100 mΩ Maximum

Life Expectancy:

Mechanical: 10,000,000 operations

Electrical: 200,000 operations minimum

(at maximum rated load)

Inputs:

Dry Contact Specifications:

Contact Resistance: 500 mΩ Maximum

Current Capacity: 100mA at 5VDC Minimum

Environmental:

Ambient Temperature: -40°C to +80°C (-40°F to 176°F)

Ambient Humidity: 0% to 100% (see note)

